



# Resource Management & Scheduling

**Dr. Spyridon Xergias**

**xergias@di.uoa.gr**



# Resource Management: Why is it so important?

Resources ?  
(Visible -  
invisible)

Wireless  
Technologies (LTE,  
LTE-A, WiMAX,  
WiMAX2)

QoS in modern  
wireless networks

Traditional &  
Modern Scheduling  
Algorithms

Case Study:  
WiMAX (Co-FRTS)


PMP - MESH

Simulation  
Environments






# Resources (invisible) – Electromagnetic Spectrum

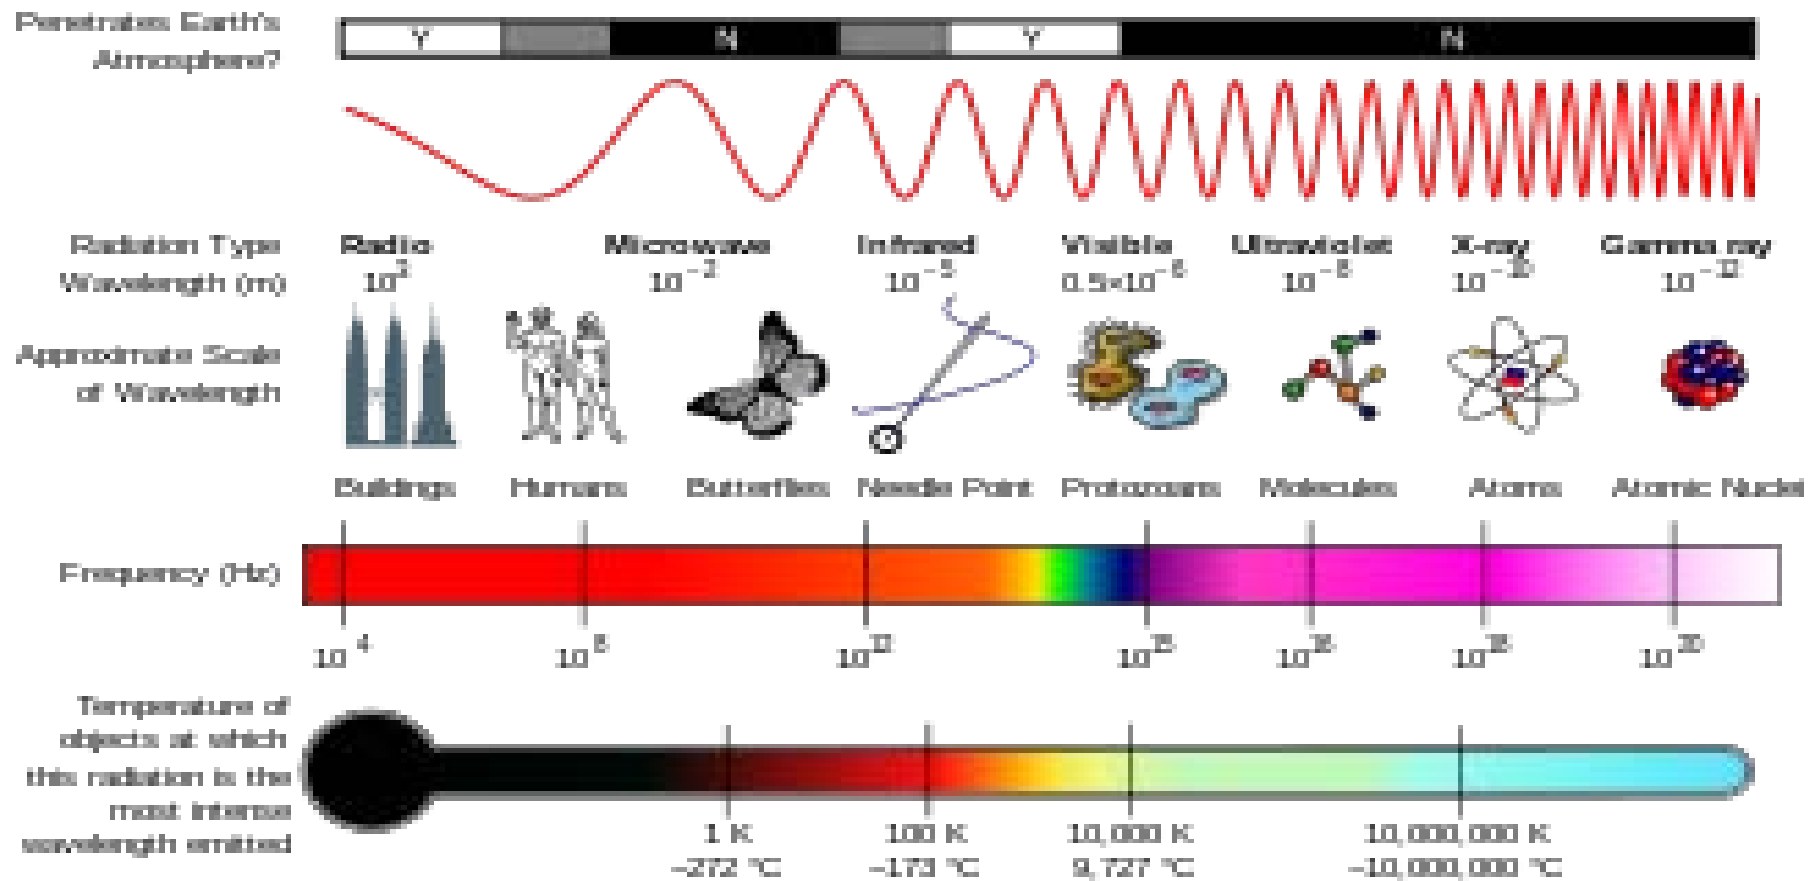



# Resources (invisible) – Electromagnetic Spectrum

CLASS	FREQUENCY	WAVELENGTH	ENERGY
γ	300 EHz	1 pm	1.24 MeV
HX	30 EHz	10 pm	124 keV
SX	3 EHz	100 pm	12.4 keV
SX	300 PHz	1 nm	1.24 keV
EUV	30 PHz	10 nm	124 eV
NUV	3 PHz	100 nm	12.4 eV
NIR	300 THz	1 μm	1.24 eV
MIR	30 THz	10 μm	124 meV
FIR	3 THz	100 μm	12.4 meV
EHF	300 GHz	1 mm	1.24 meV
SHF	30 GHz	1 cm	124 μeV
UHF	3 GHz	1 dm	12.4 μeV
VHF	300 MHz	1 m	1.24 μeV
HF	30 MHz	10 m	124 neV
MF	3 MHz	100 m	12.4 neV
LF	300 kHz	1 km	1.24 neV
VLF	30 kHz	10 km	124 peV
VF/ULF	3 kHz	100 km	12.4 peV
SLF	300 Hz	1 Mm	1.24 peV
ELF	30 Hz	10 Mm	124 feV
	3 Hz	100 Mm	12.4 feV

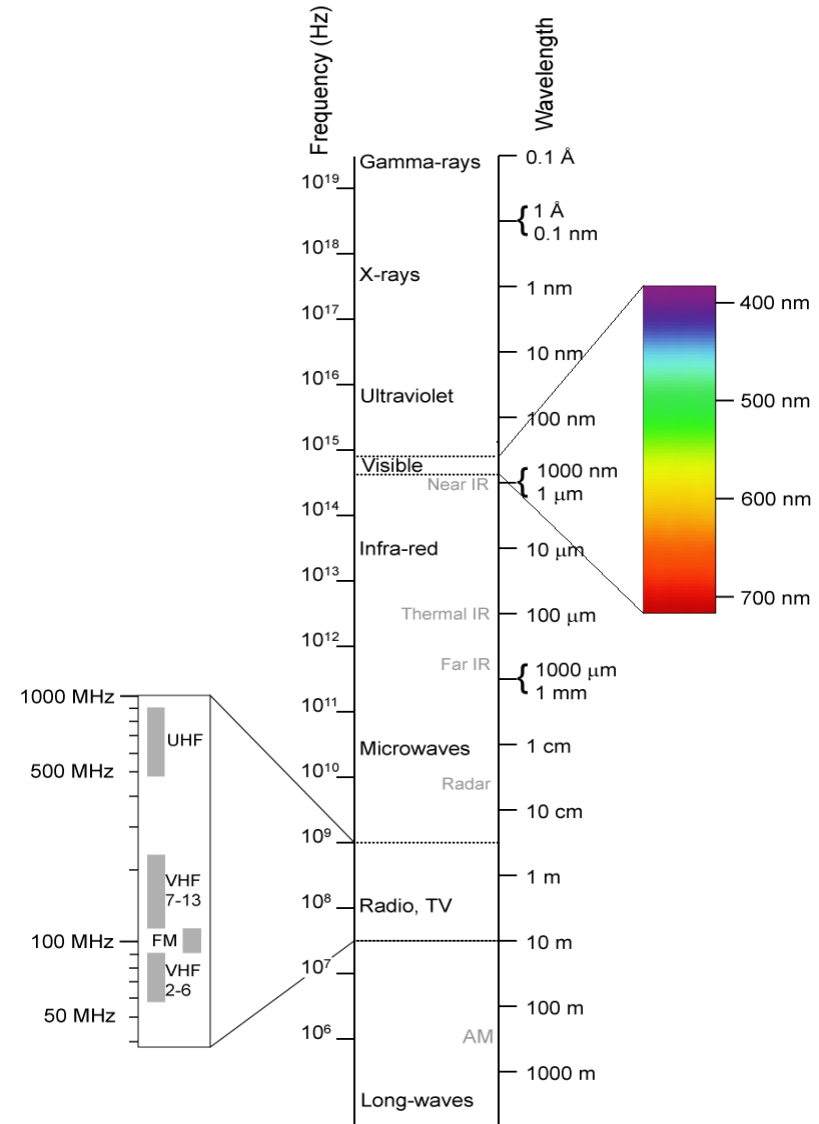

# Resources (visible) – Equipment

- User Equipment



- ISP Infrastructure



- Common type of hardware – different scale

- Process Power
- Memory
- Antenna(s)
- Transmission Power





# Resource Management Role

- Efficiently use spectrum
- According to Wireless System should take into consideration:
  - Architecture (LTE, LTE-A, WiMAX, WiMAX 2 etc)
  - Point-to-multipoint & Mesh architectures
  - PHY (Transmission scheme, Multiple Access Scheme, Modulations etc)
  - MAC → QoS
  - Interference
  - Target (Throughput, QoE, QoS, scale economy, etc)
- According to the equipment should take into consideration:
  - Available Process Power
  - Memory
  - Power
  - Mobility




# **LTE / LTE-A Architecture & other major characteristics**





# LTE Architecture

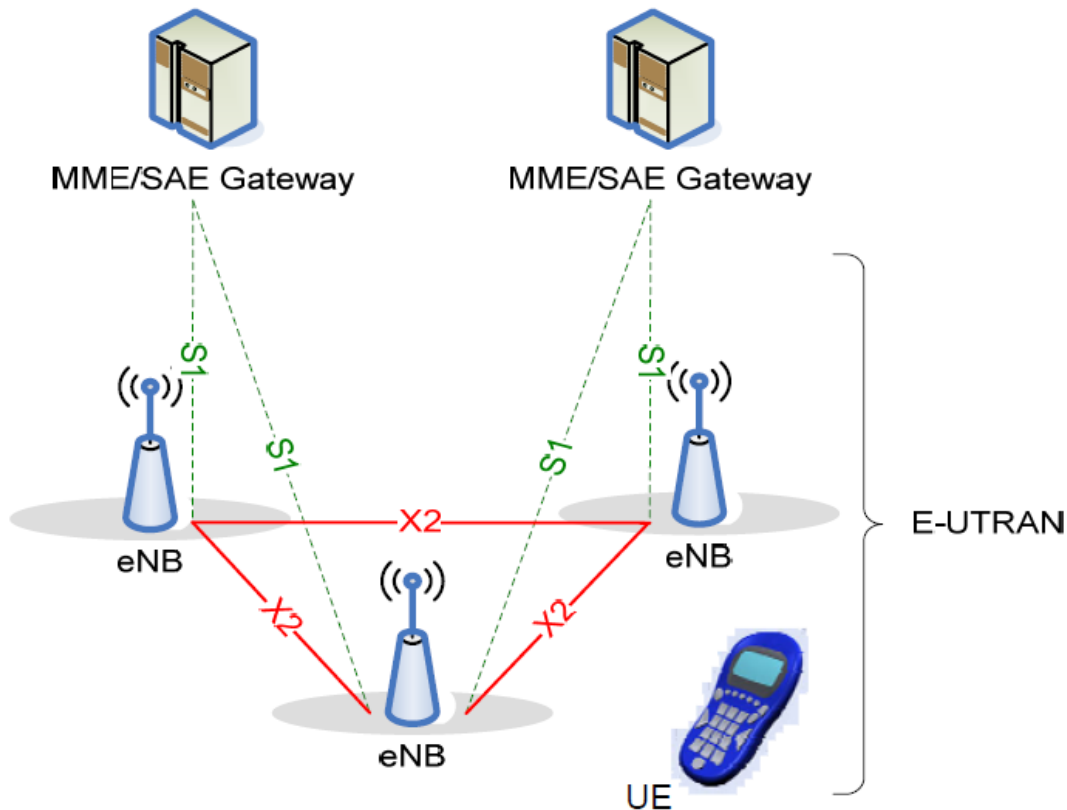


- **eNB**: Enhanced Node B, or base station
- **UE**: User Equipment
- **EPC**: Evolved Packet Core
  - **MME**: Mobility Management Entity (Control Plane)
  - **SAE**: System Architecture Evolved (User Plane)
- **E-UTRAN**: Evolved Universal Terrestrial Radio Access Network






# Heterogeneous networks in LTE-A

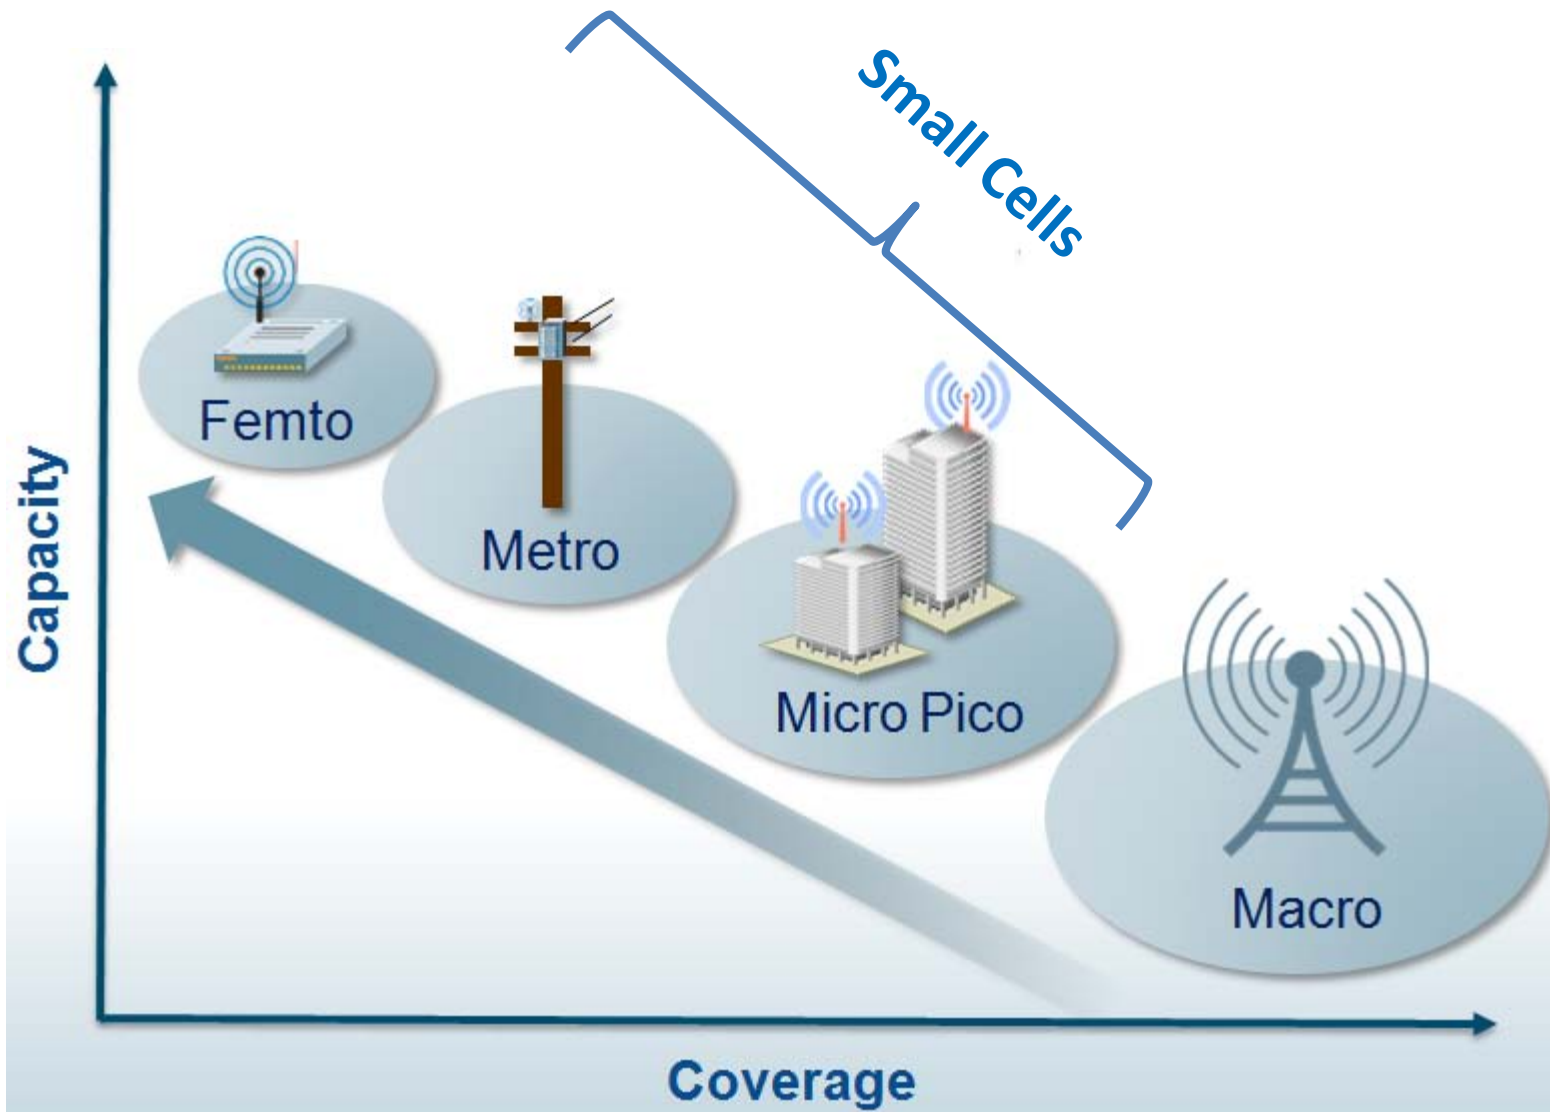



# Comparison of LTE Speed

## 2G – 4G Data download rates

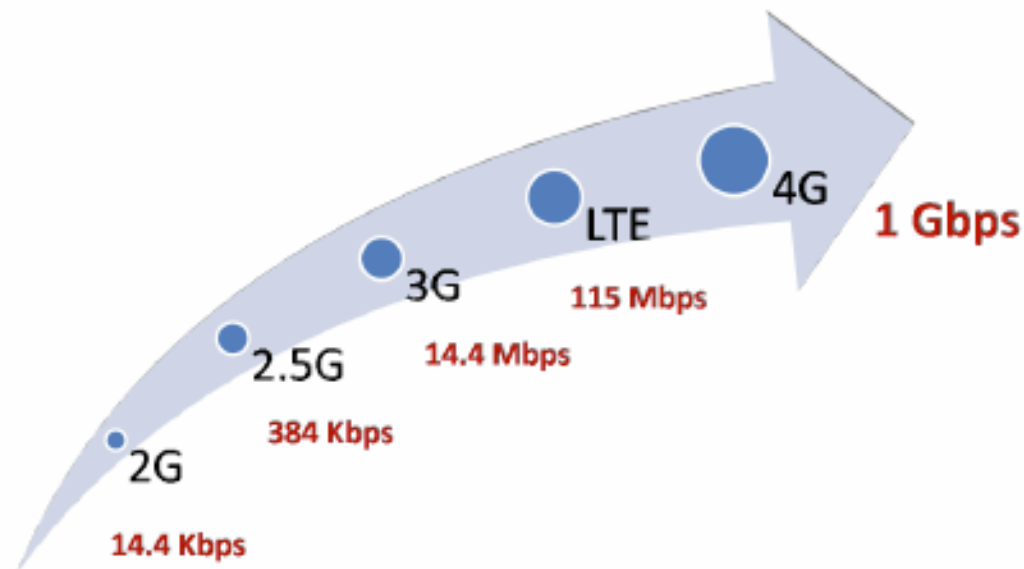

- 2.5G speed is based on the maximum offered by EDGE
- 3G speed is based on the maximum offered by HSDPA






# Key features of LTE

- **Multiple access scheme**
  - *DL: OFDMA*
  - *UL: Single Carrier FDMA (SCFDMA)*
- **Adaptive modulation & Coding**
  - *DL/UL modulations: QPSK, 16QAM & 64QAM*
  - *Convolutional code & Rel-6 turbo code*
- **Advanced MIMO spatial multiplexing techniques**
  - *(2 or 4)x(2 or 4) downlink & uplink supported*
  - *Multi-user MIMO also supported*
- **Support for both FDD & TDD**
- **H-ARQ, mobility support, rate control, security & etc**




# SC/OFDM/OFDMA

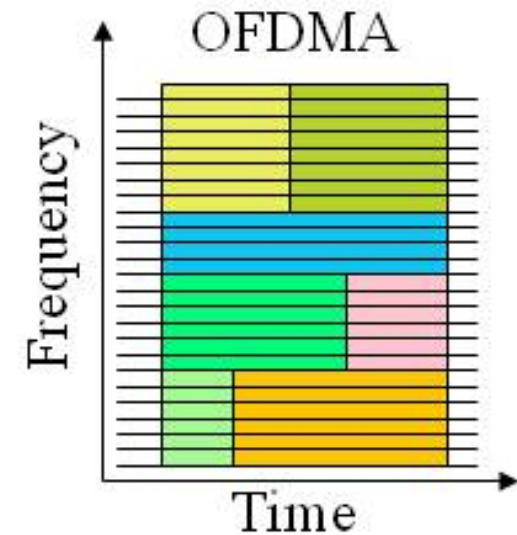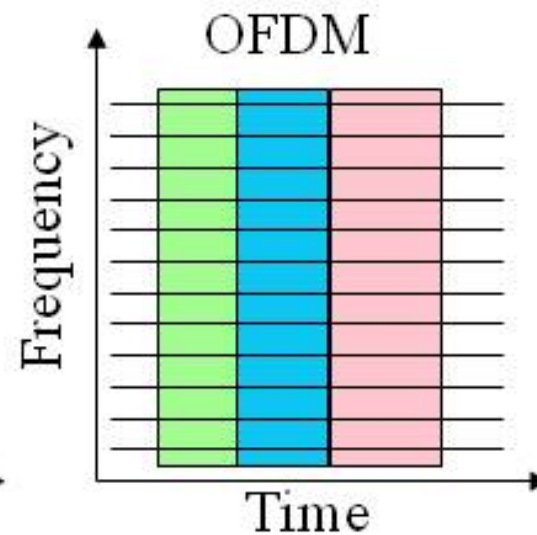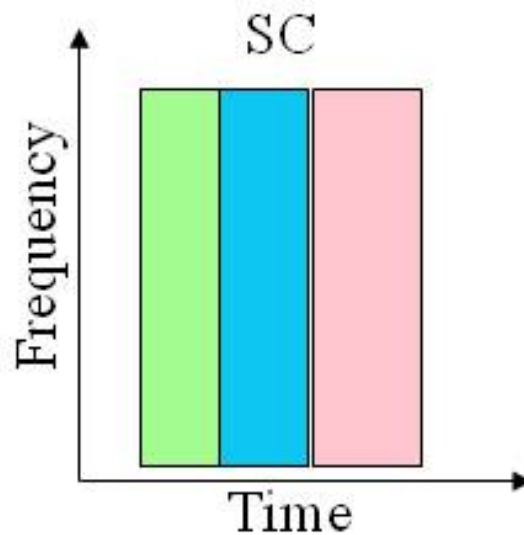



# LTE Uplink (SC-FDMA)

- SC-FDMA is a new single carrier multiple access technique which has similar structure and performance to OFDMA
- More complex, but consumes less power

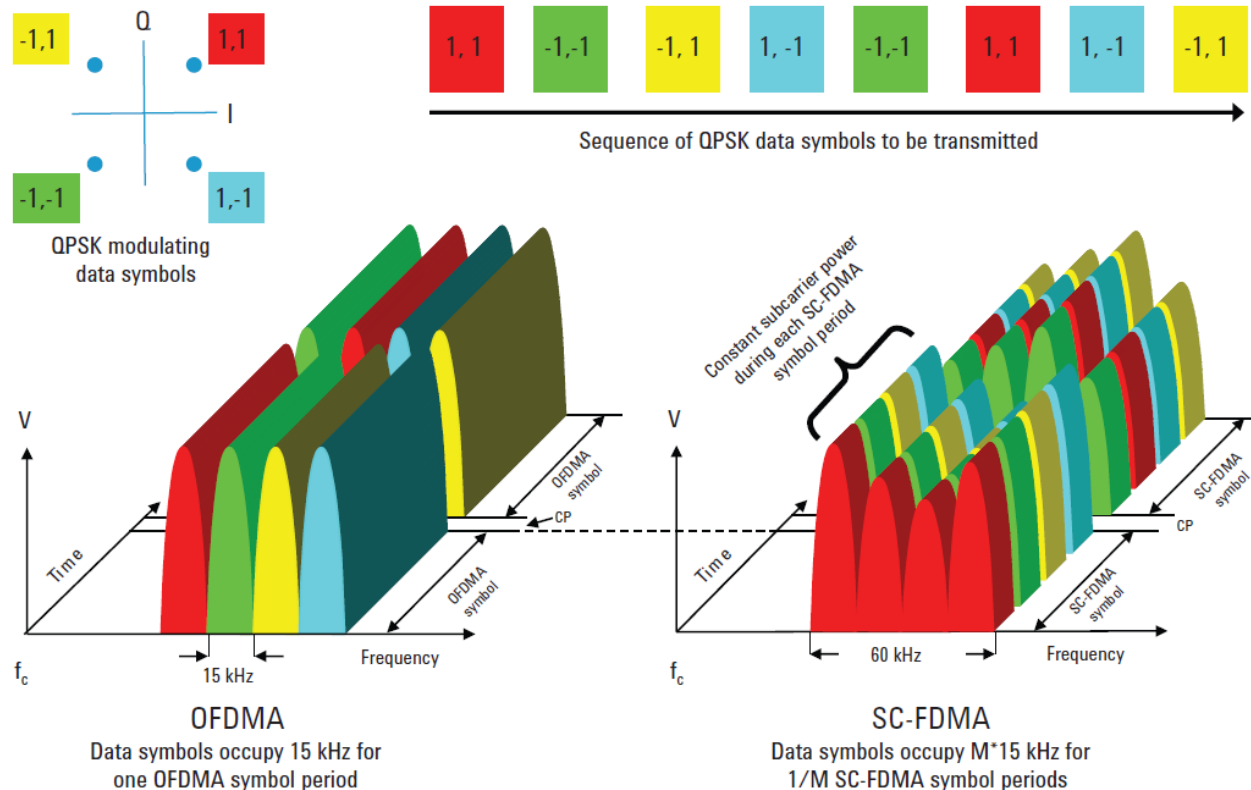



# Peak data rates of LTE

## Downlink peak data rates (64 QAM)


Antenna configuration	SISO	2x2 MIMO	4x4 MIMO
Peak data rate Mbps	100	172.8	326.4

## Uplink peak data rates (single antenna)

Modulation	QPSK	16 QAM	64 QAM
Peak data rate Mbps	50	57.6	86.4




# Generic Frame Structure

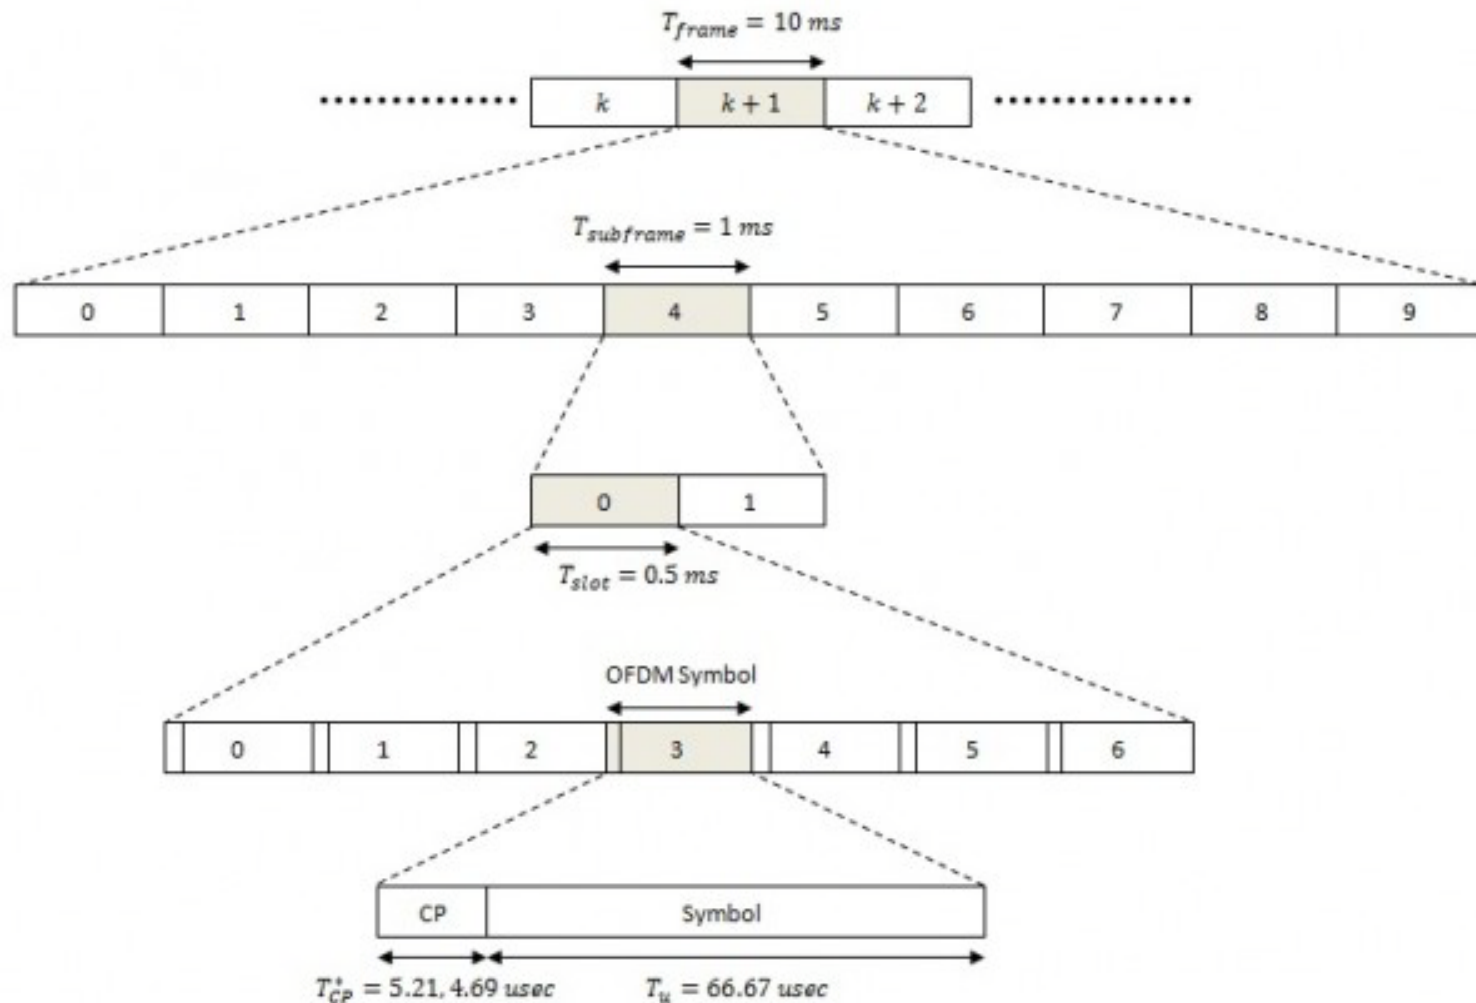




# Resource Grid

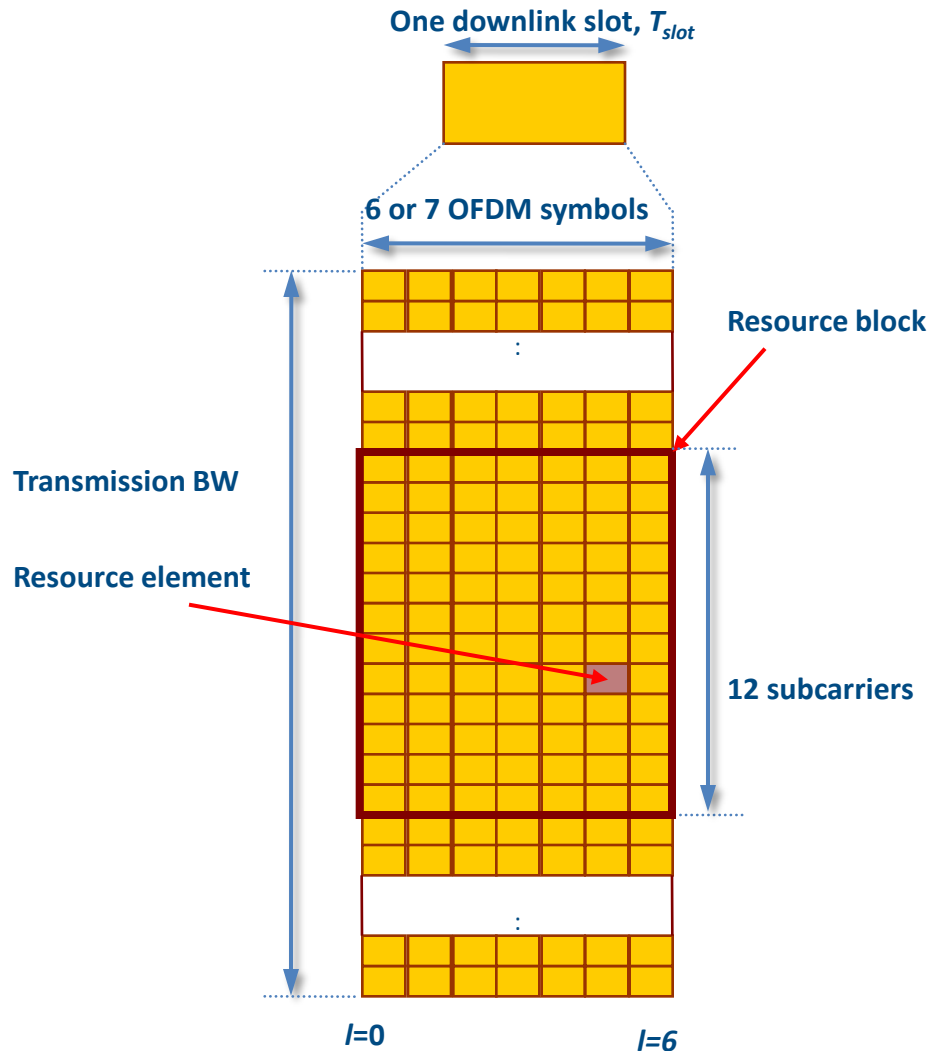

- 6 or 7 OFDM symbols in 1 slot
- Subcarrier spacing = 15 kHz
- Block of 12 SCs in 1 slot = 1 RB
  - $0.5\text{ ms} \times 180\text{ kHz}$
  - Smallest unit of allocation



# Resource grid 2D

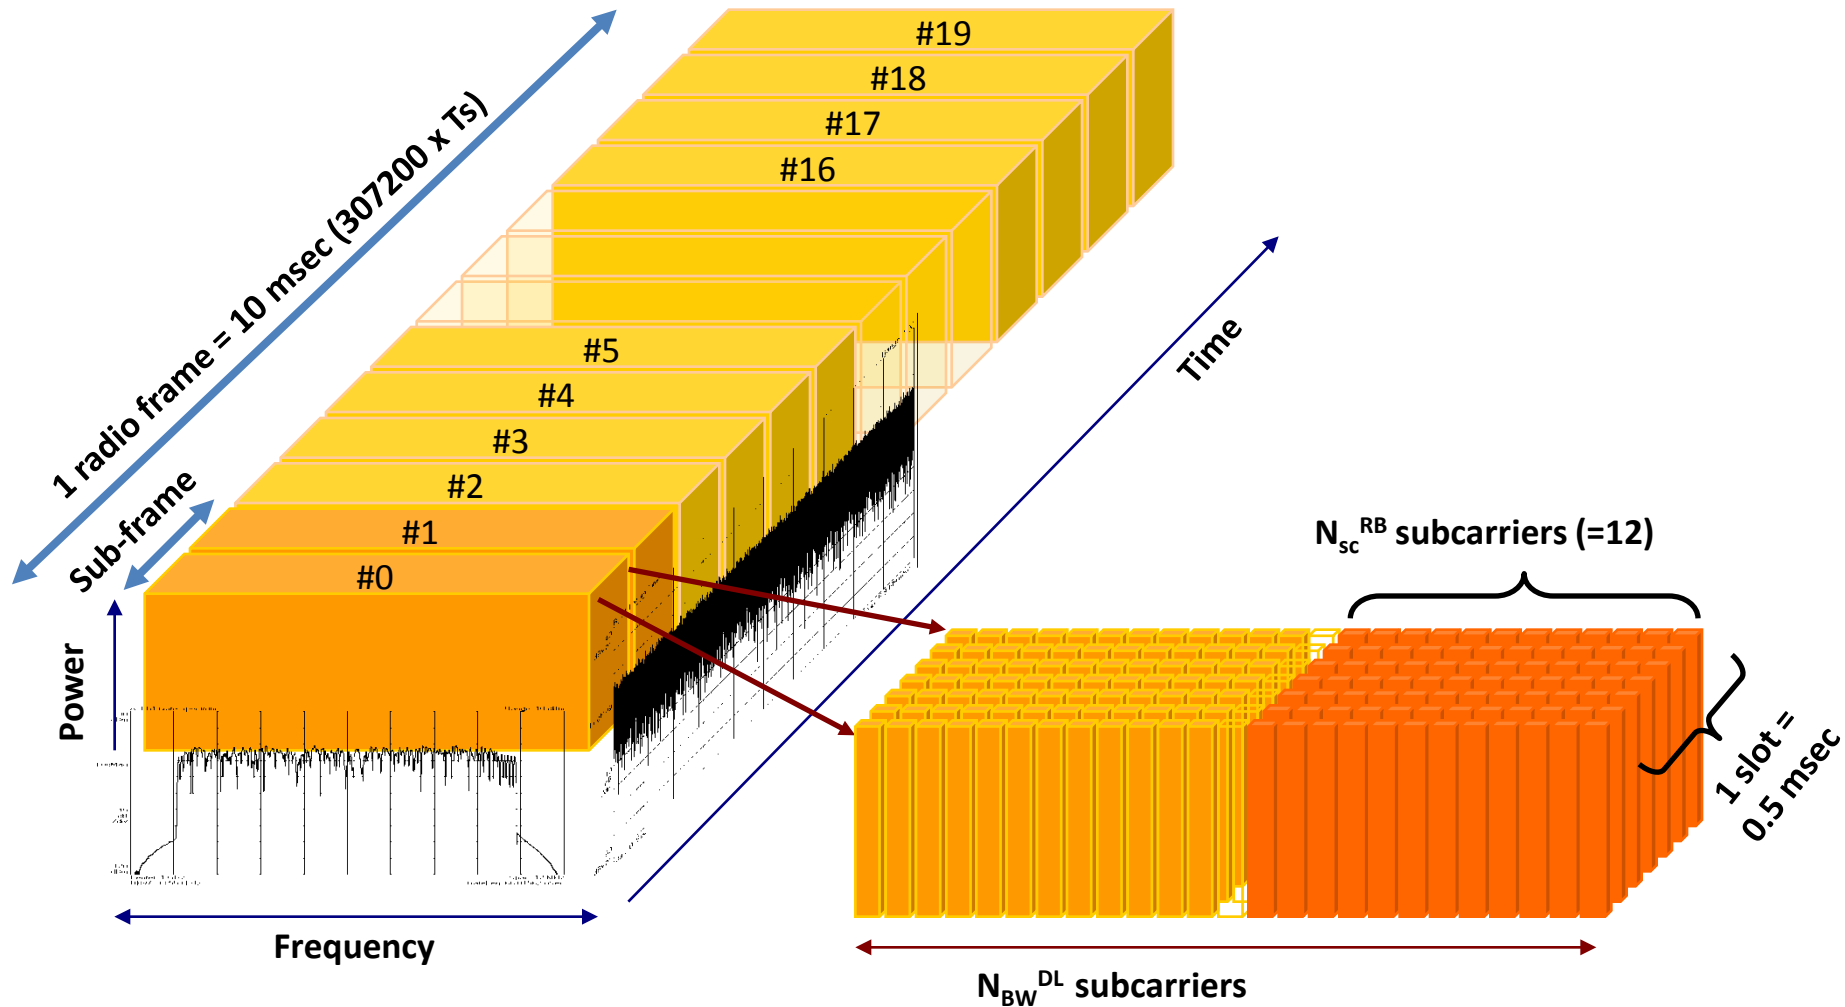




# Allocation of physical resource blocks (PRBs) is handled by a scheduling function at the 3GPP base station (eNodeB)

One resource element

QPSK, 2bits  
16QAM, 4bits  
64QAM, 6bits


$\Delta f = 15\text{kHz}$

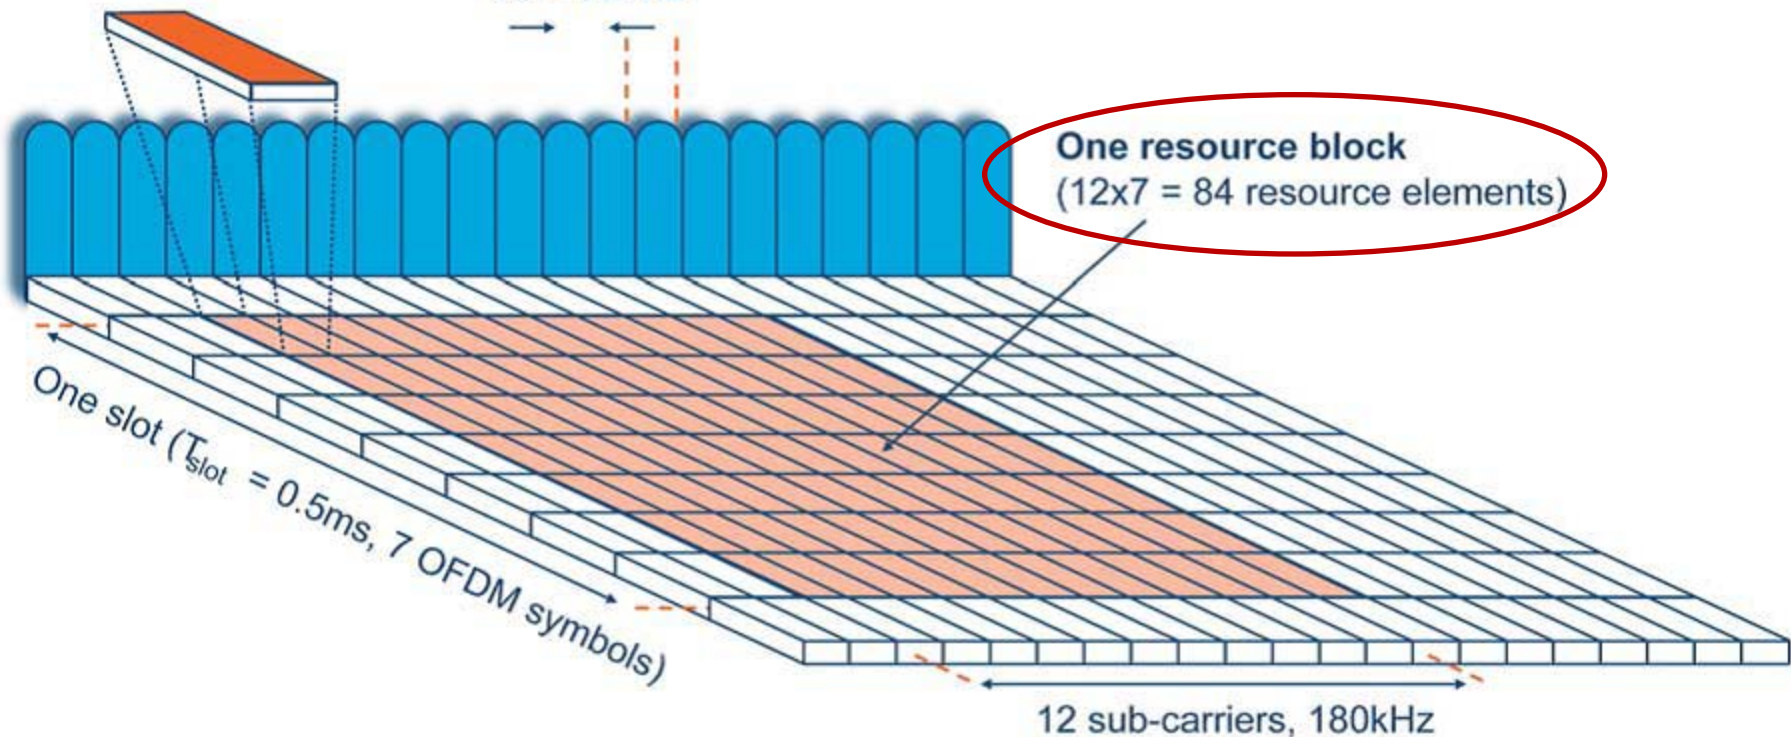

# LTE-A main features


## Support of Wider Bandwidth(Carrier Aggregation)

- Use of multiple component carriers(CC) to **extend bandwidth up to 100 MHz**
- Common physical layer parameters between component carrier and LTE Rel-8 carrier
- ➔ **Improvement of peak data rate**, backward compatibility with LTE Rel-8

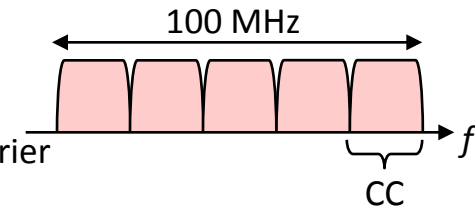

## Advanced MIMO techniques

- Extension to up to **8-layer transmission in downlink**
- Introduction of single-user MIMO up to **4-layer transmission in uplink**
- Enhancements of multi-user MIMO
- ➔ **Improvement of peak data rate and capacity**

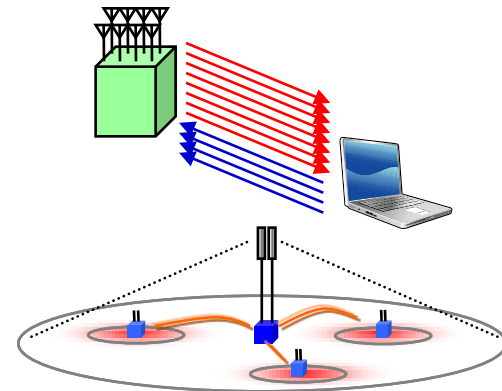


## Heterogeneous network and eICIC (enhanced Inter-Cell Interference Coordination)

- **Interference coordination** for overlaid deployment of cells with different Tx power
- ➔ **Improvement of cell-edge throughput and coverage**

## Relay

- Supports radio backhaul and **creates a separate cell** and appear as Rel. 8 LTE eNB to Rel. 8 LTE UEs
- ➔ **Improvement of coverage and flexibility** of service area extension

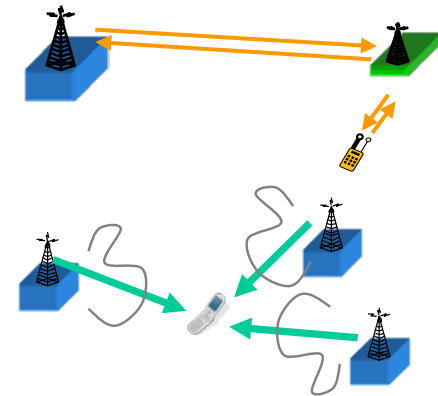

## Coordinated Multi-Point transmission and reception (CoMP)

- Support of **multi-cell transmission and reception**
- ➔ **Improvement of cell-edge throughput and coverage**



# LTE / LTE-A comparison

Technology	LTE	LTE--A
Peak data rate Down Link (DL)	150 Mbps	1 Gbps
Peak data rate Up Link (UL)	75 Mbps	500 Mbps
Transmission bandwidth DL	20MHz	100 MHz
Transmission bandwidth UL	20MHz	40 MHz (requirements as defined by ITU)
Mobility	Optimized for low speeds(<15 km/hr) High Performance At speeds up to 120 km/hr Maintain Links at speeds up to 350 km/hr	Same as that in LTE
Coverage	Full performance up to 5 km	a) Same as LTE requirement b) Should be optimized or deployment in local areas/micro cell environments.
Scalable Band Widths	1.3,3, 5, 10, and 20 MHz	Up to 20–100 MHz
Capacity	200 active users per cell in 5 MHz.	3 times higher than that in LTE




# **WiMAX / WiMAX 2 Architecture & other major characteristics**





# WirelessMAN: Wireless Metropolitan Area Network

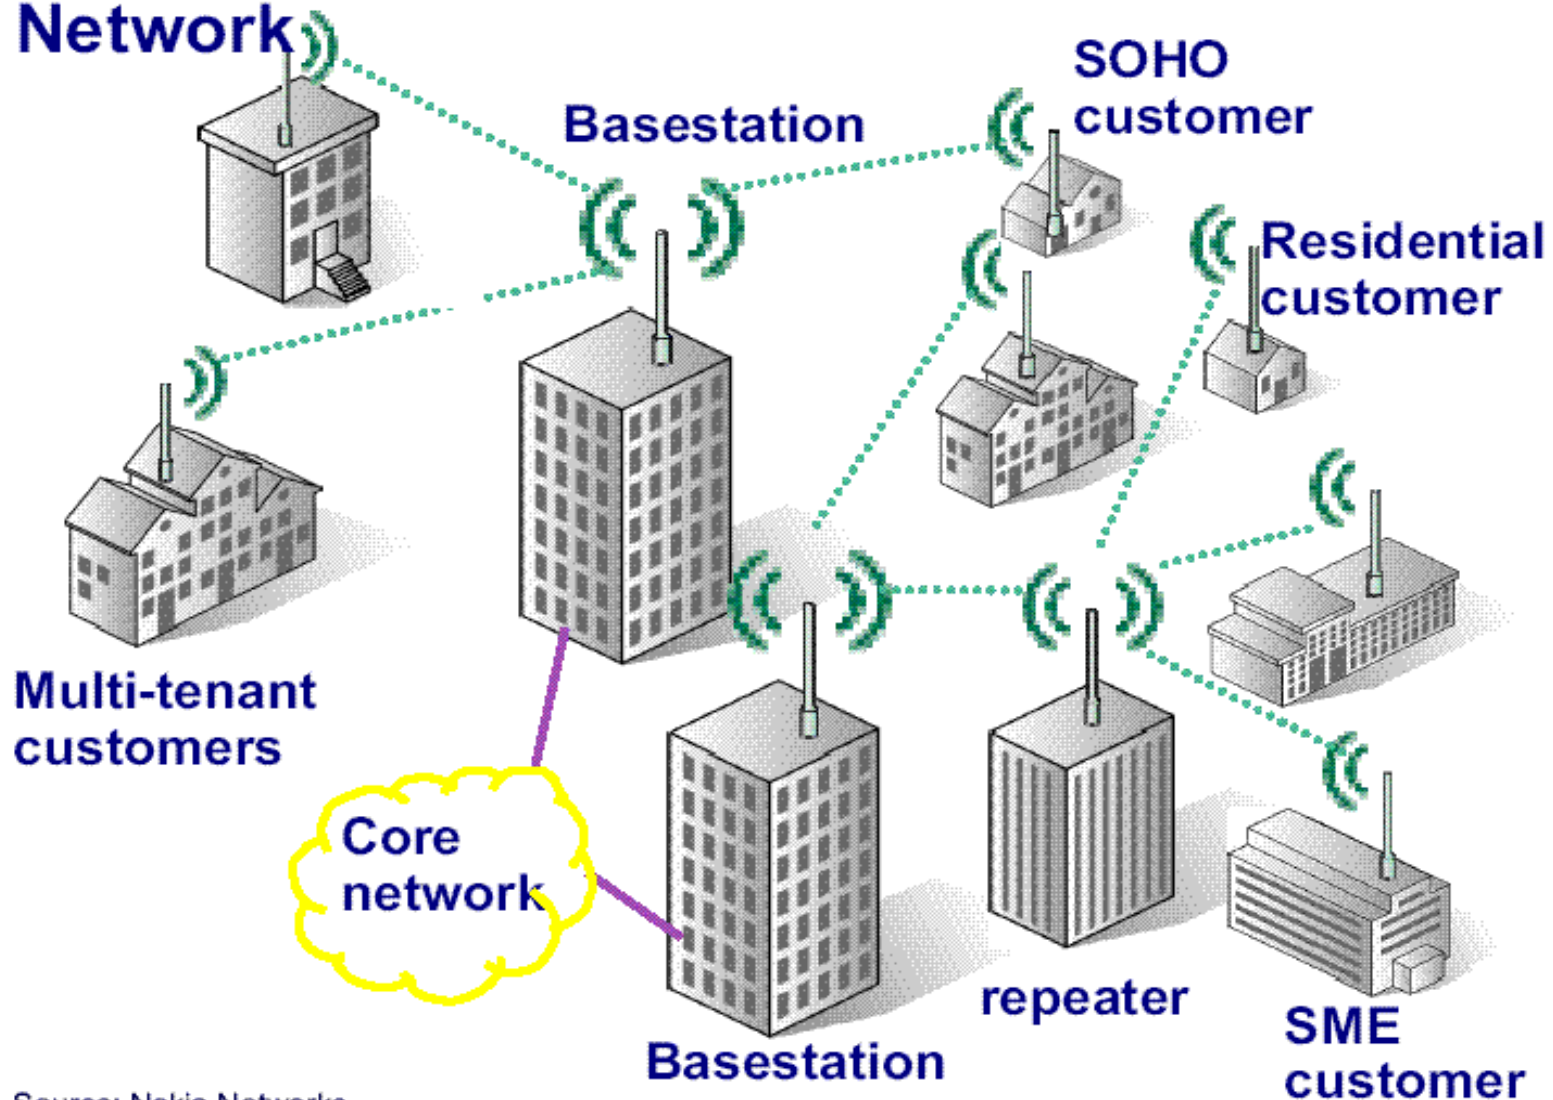


Source: Nokia Networks






# Bandwidth request & allocation

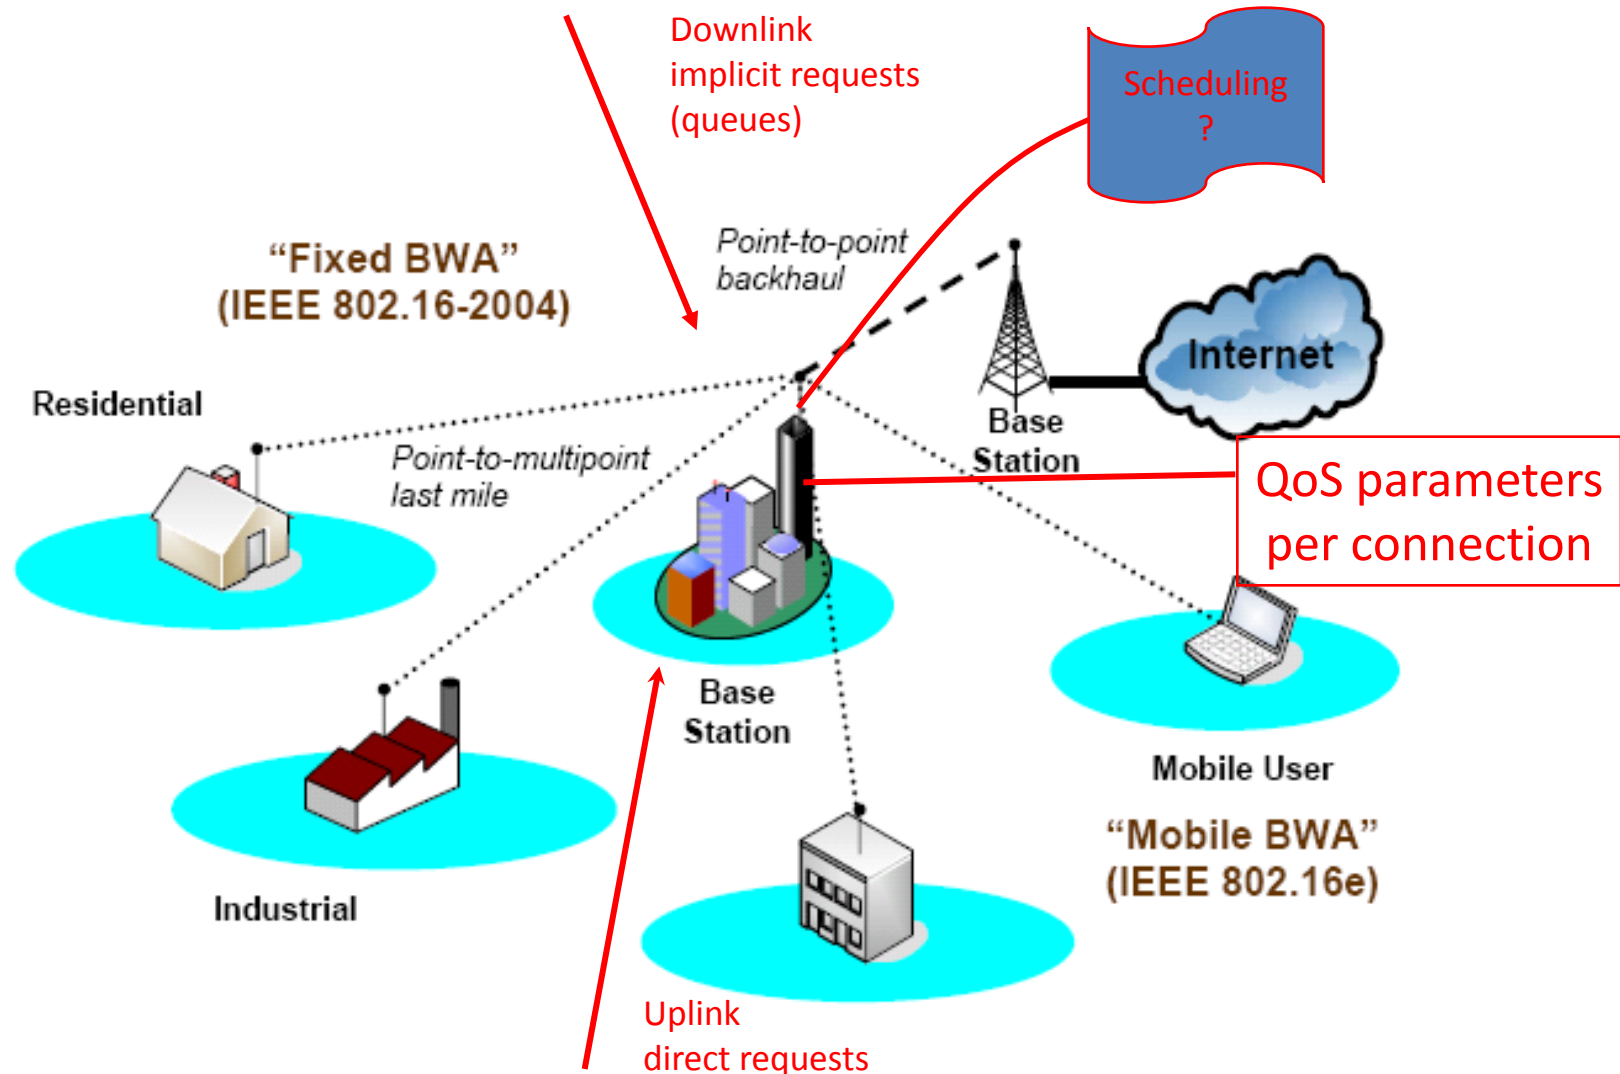




# WiMAX Architecture

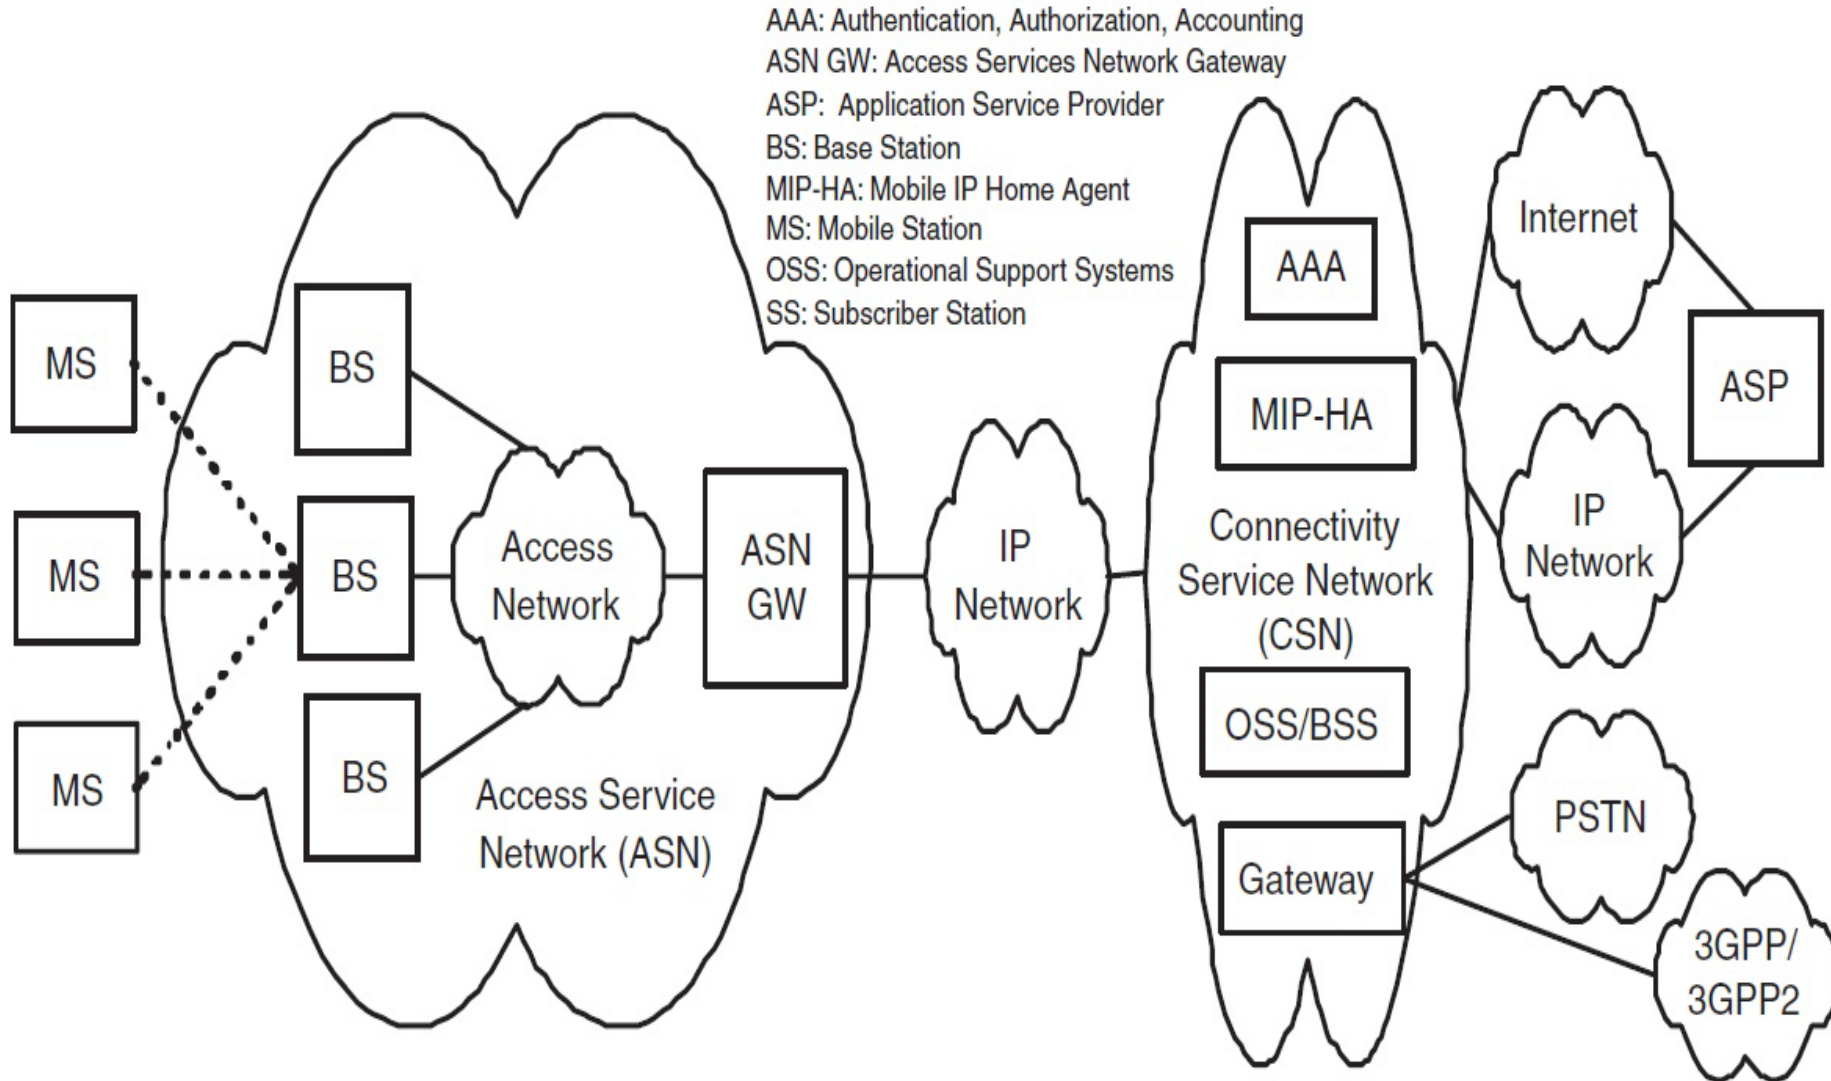

# WiMaX Layers

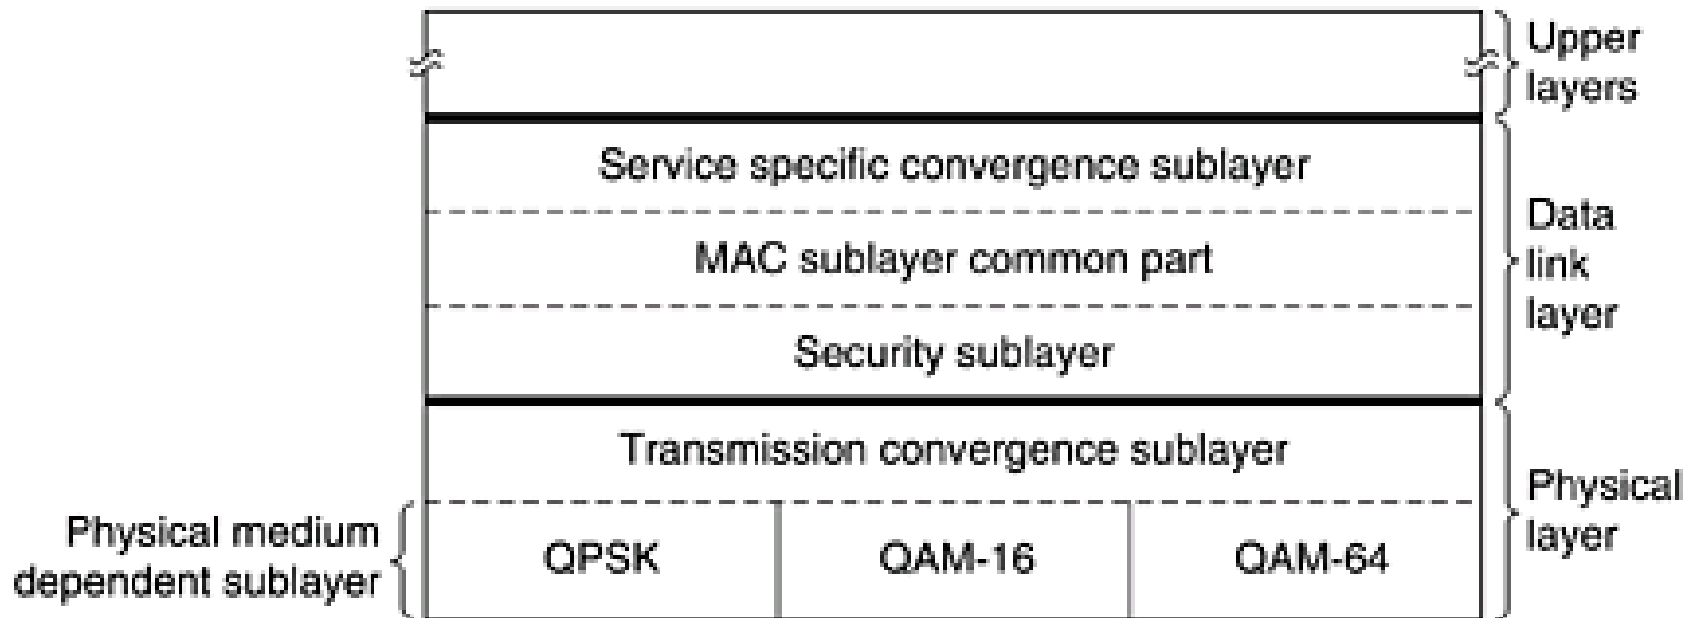



## Extensions in 802.16e

- Mobility support
- Orthogonal time division multiple access (OFDMA)




# Media Access Control (MAC)



- **Connection oriented μετάδοση**
  - *Connection ID (CID)*
  - *Uni-directional*
- **Channel access:**
  - *UL-MAP*
    1. Includes reservation information for the uplink
    2. Who transmits (to the Base Station) & when
  - *DL-MAP*
    1. Includes reservation information for the downlink
    2. Who receives (from the Base Station) & when
  - *UL-MAP & DL-MAP are transmitted at the beginning of each time frame (broadcasting).*



# Time Division Duplexing (TDD)

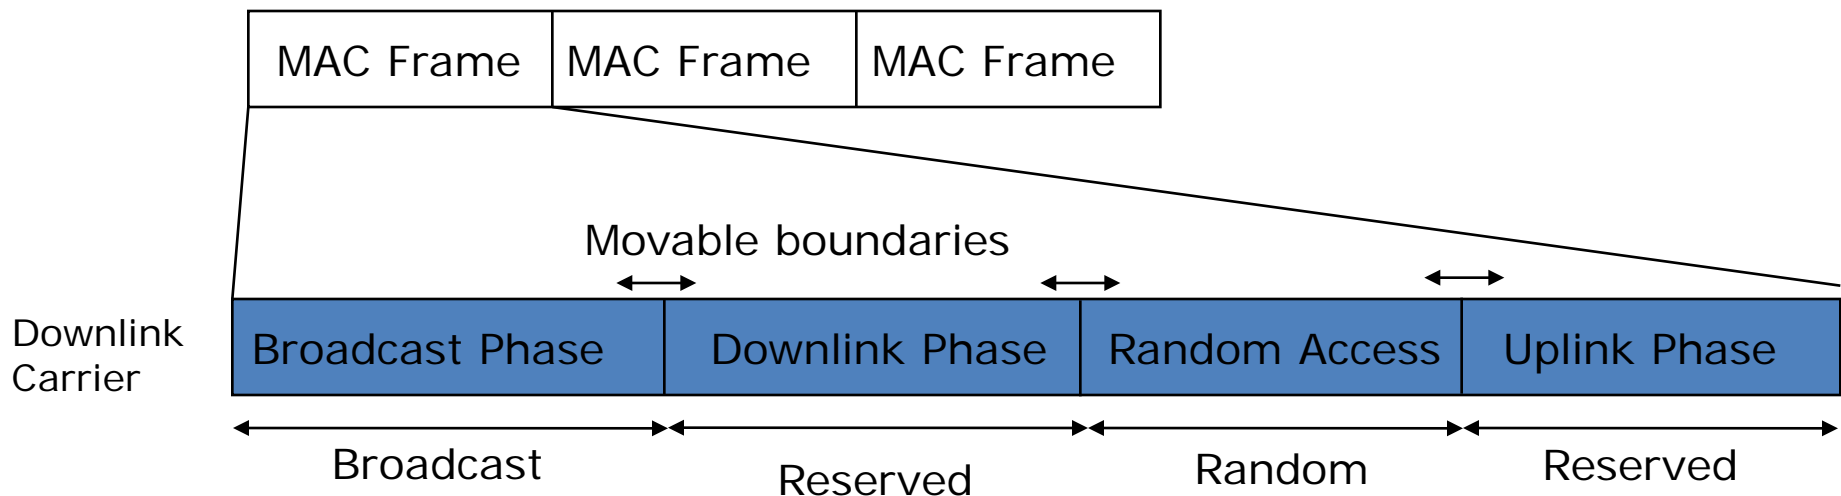




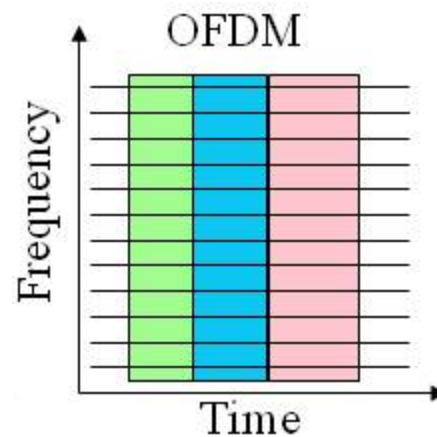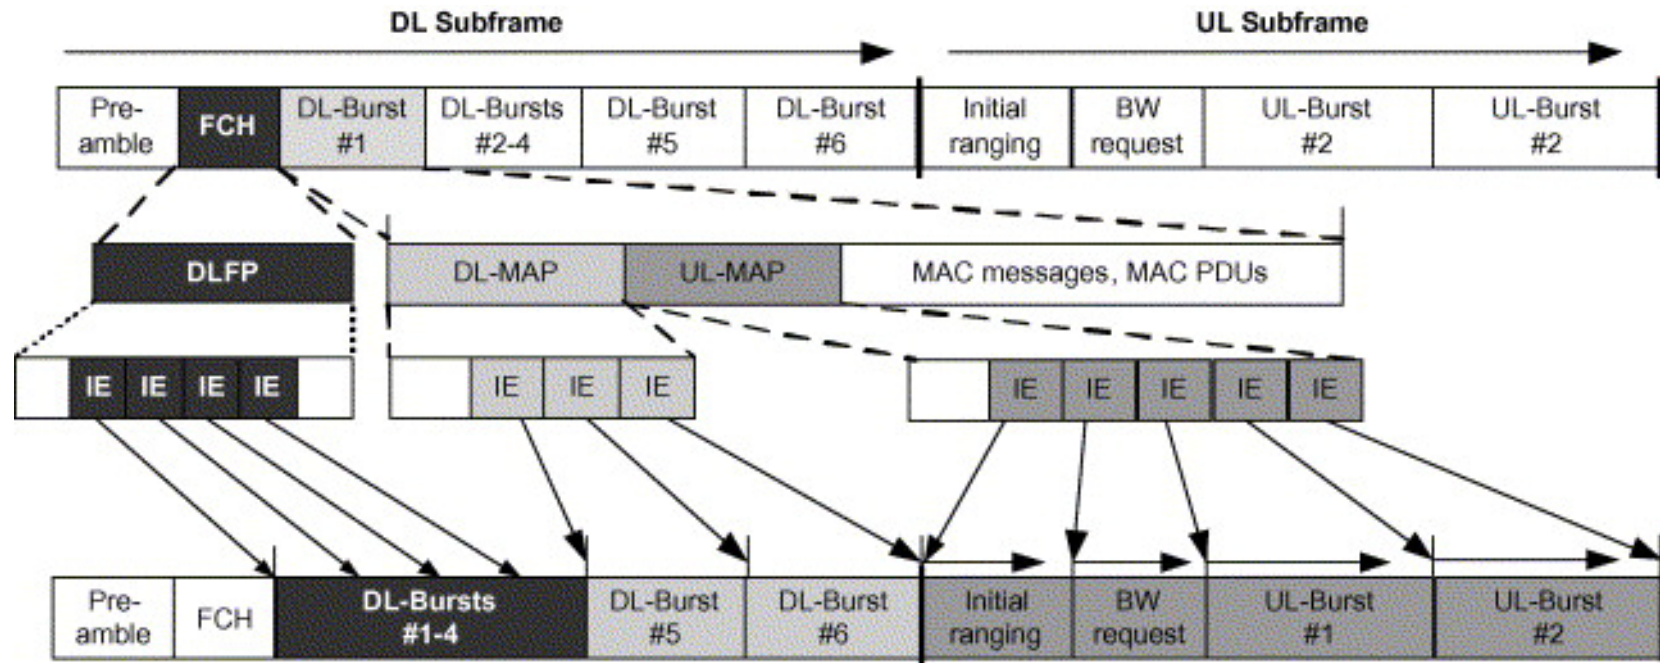





# SC/OFDM/OFDMA

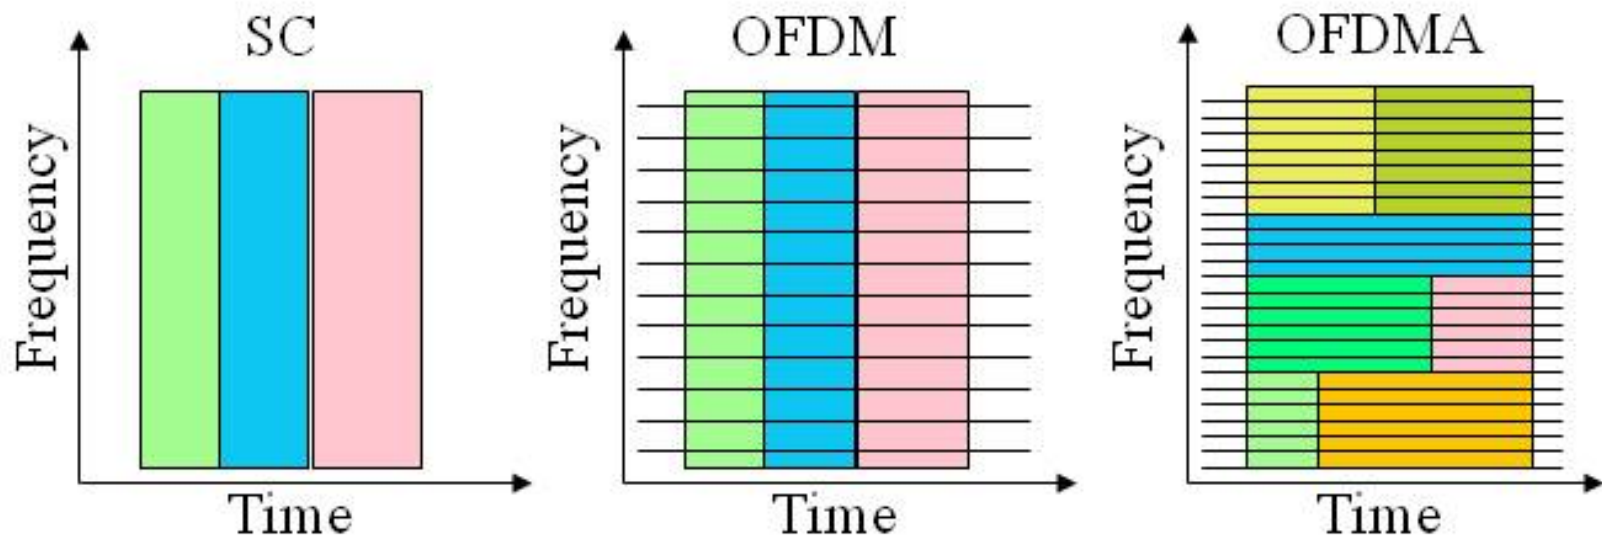



# Advantages of OFDMA


- More **flexible allocation** of the available spectrum.
- Avoid transmission in **low quality carriers** (e.g., due to interference).
- **Lower maximum transmission power** for users.
- Higher overall **throughput**.
- Allows **simultaneous transmissions** from several users.
- Lower **delay variance**.
- Averaging interferences from **neighboring cells**, by using different carriers when possible.

## Disadvantage


- Considerably **complex** in design & implementation



# OFDMA & OFDM symbol example

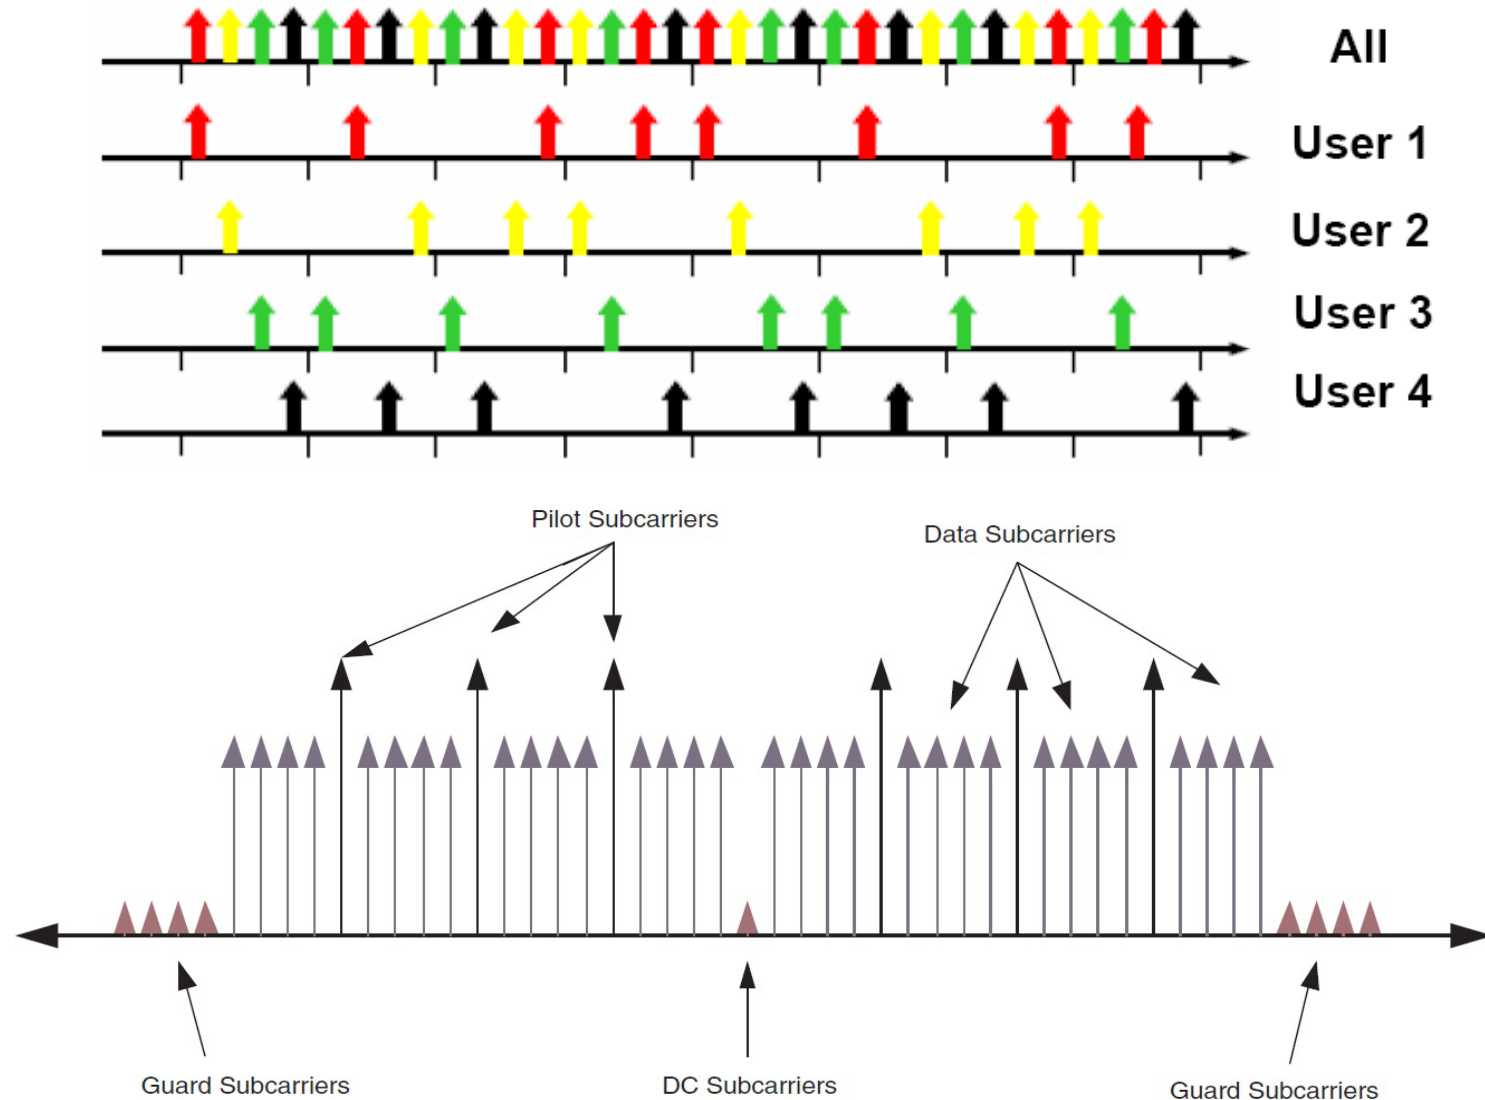


# Adaptive modulation

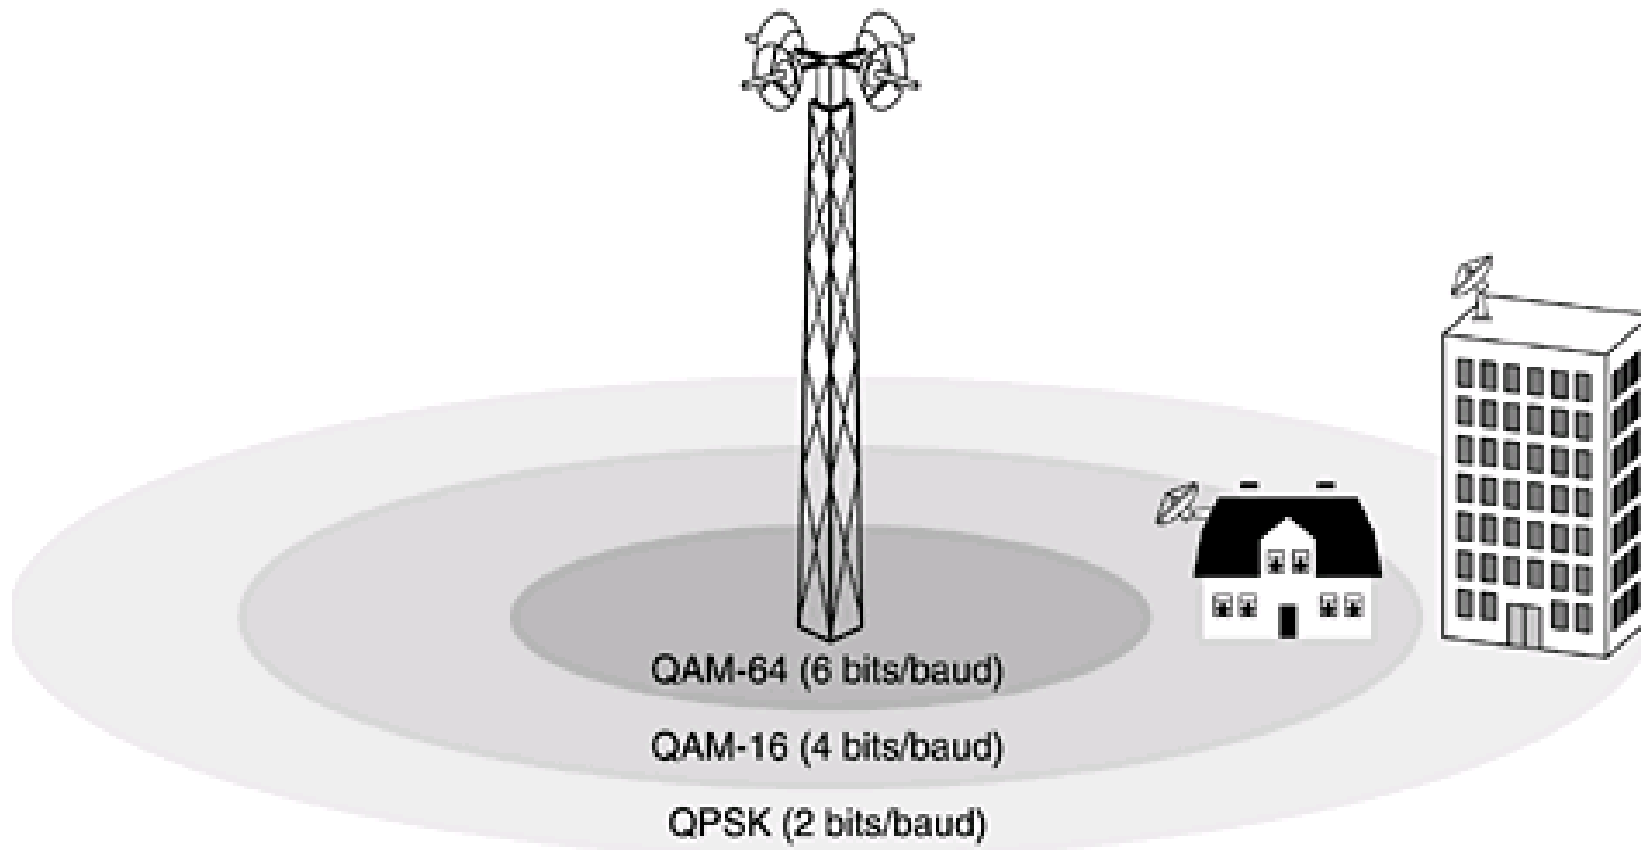



# OFDMA/TDD structure

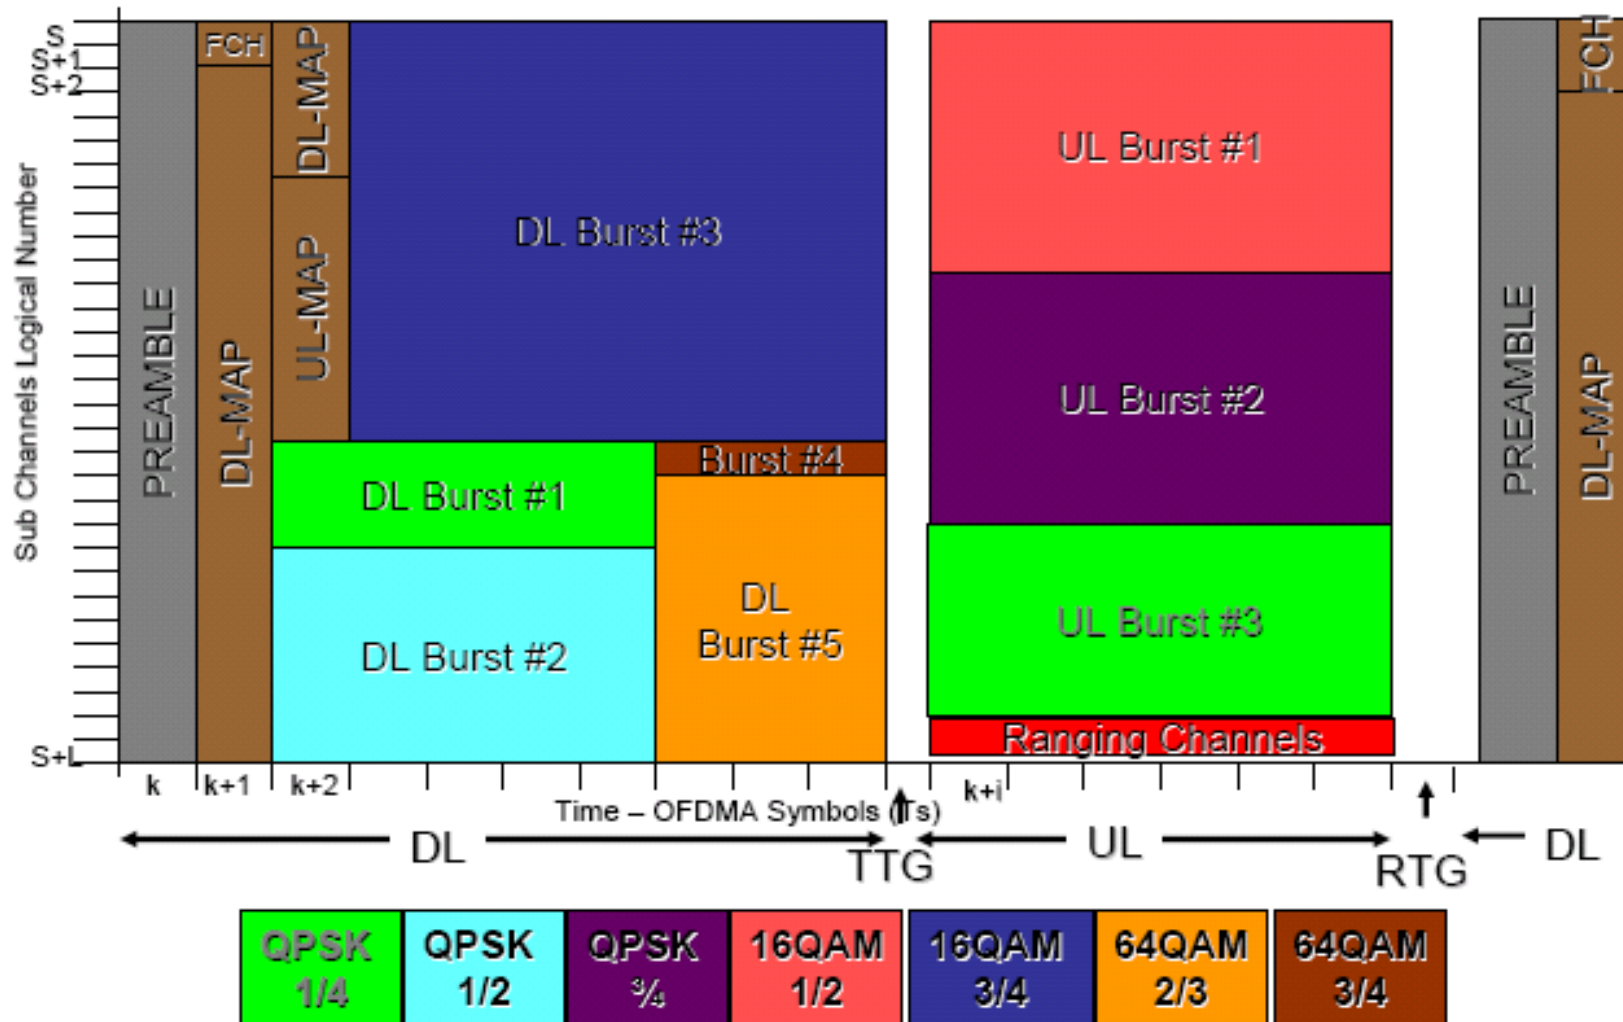



# OFDM symbol parameters in frequency domain

Parameters	Fixed WiMAX OFDMA-PHY	Mobile WiMAX Scalable OFDMA-PHY <sup>a</sup>			
		128	512	1024	2048
FFT Size	256	128	512	1024	2048
Number of data subcarriers to be used <sup>b</sup>	192	72	360	720	1440
Number of pilot subcarriers	8	12	60	120	240
Number of null/guardband subcarriers	56	44	92	184	368
Cyclic prefix or guard time (T <sub>g</sub> /T <sub>b</sub> )	1/32, 1/16, 1/8, 1/4				
Oversampling Rate (in F <sub>s</sub> /BW)	Considering BW: 7/6 for 256 OFDM, 8/7 for multiples of 1.75MHz, & 28/25 for multiples of 1.25MHz, 2MHz, ή 2.75MHz				
Channel BW in MHz	3.5	1.25	5	10	20
Subcarriers' Frequency spacing (in KHz)	15.625	10.94			
Useful symbol time(σε μs)	64	91.4			
Guard Time (Considering 12,5% in μs)	8	11.4			
OFDM symbol duration (in μs)	72	102.9			
Αριθμών OFDM συμβόλων σε χρονοπλαίσιο των 5ms	69	48.0			

# Downlink Full Usage of Subcarriers

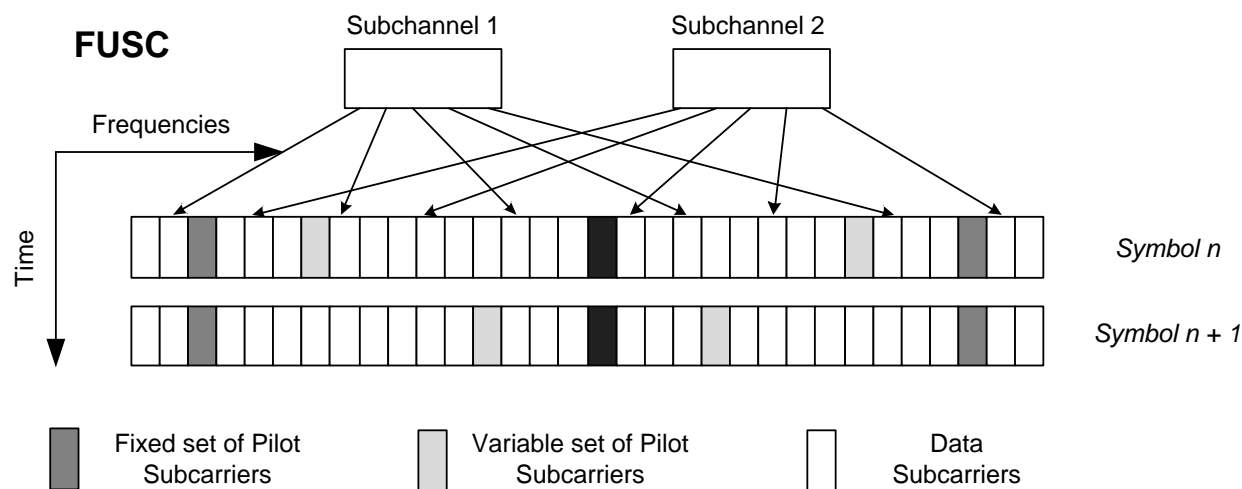


Figure: FUSC subchannelization

Table: FUSC subchannelization parameters

	128	256 <sup>a</sup>	512	1024	2048
Subcarriers per subchannel	48	N/A	48	48	48
Number of subchannels	2	N/A	8	16	32
Number of data subcarriers	96	192	384	768	1536
Number of Pilot subcarriers constant set	1	8	6	11	24
Number of Pilot subcarriers variable set	9	N/A	36	71	142
Left guard subcarriers (left-guard)	11	28	43	87	173
Right guard subcarriers (right-guard)	10	27	42	86	172





# Downlink Partial Usage of Subcarriers



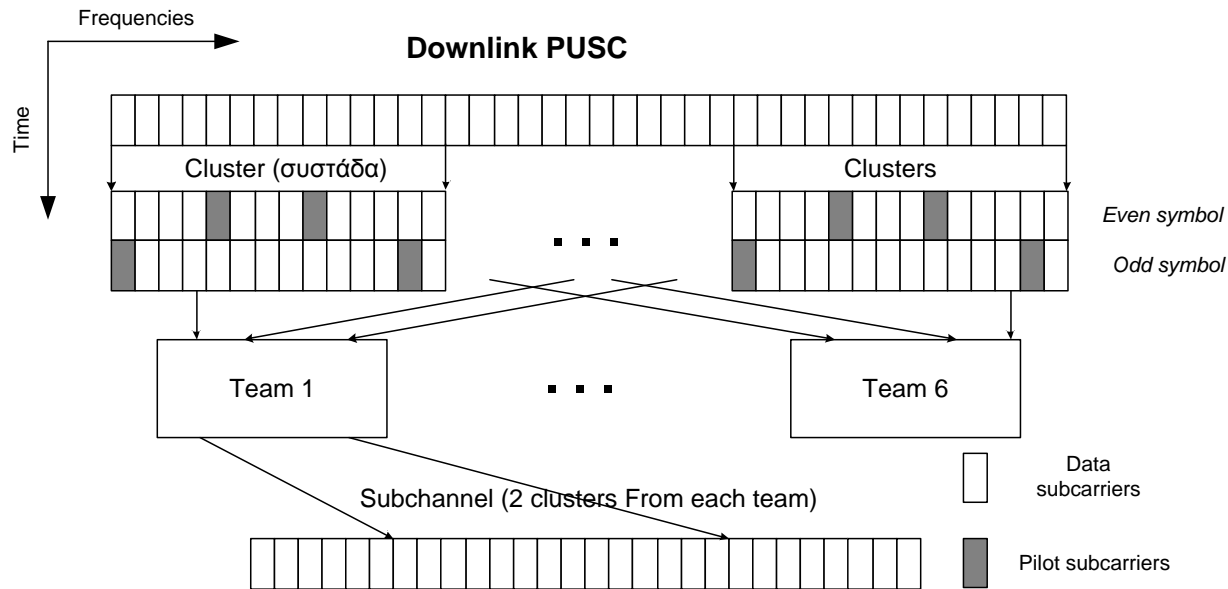


Figure: PUSC subchannelization


Table: PUSC subchannelization parameters

	128	512	1024	2048
Subcarriers per subchannel	14	14	14	14
Number of subchannels	3	15	30	60
Number of data subcarriers	72	360	720	1440
Number of Pilot subcarriers constant set	12	60	120	240
Left guard subcarriers (left-guard)	22	46	92	184
Right guard subcarriers (right-guard)	21	43	91	183

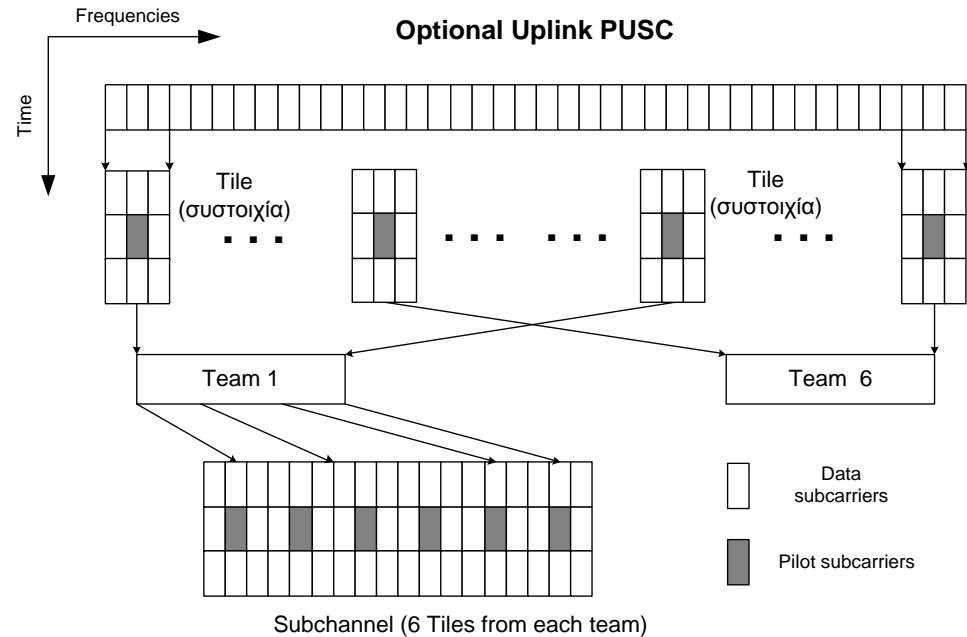

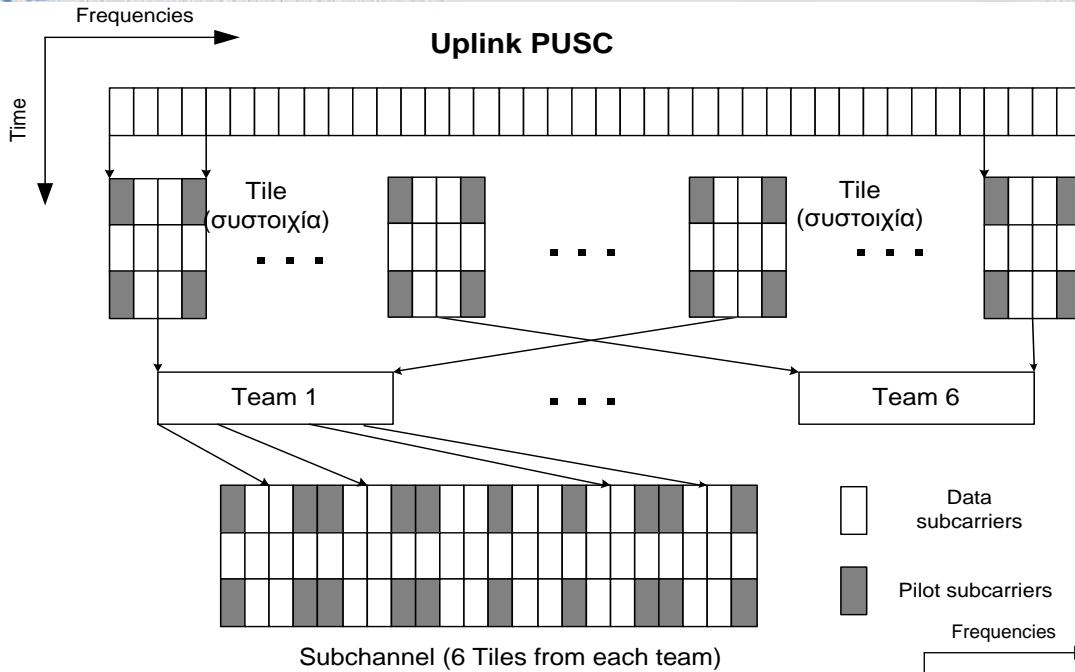

# Band Adaptive Modulation and Coding

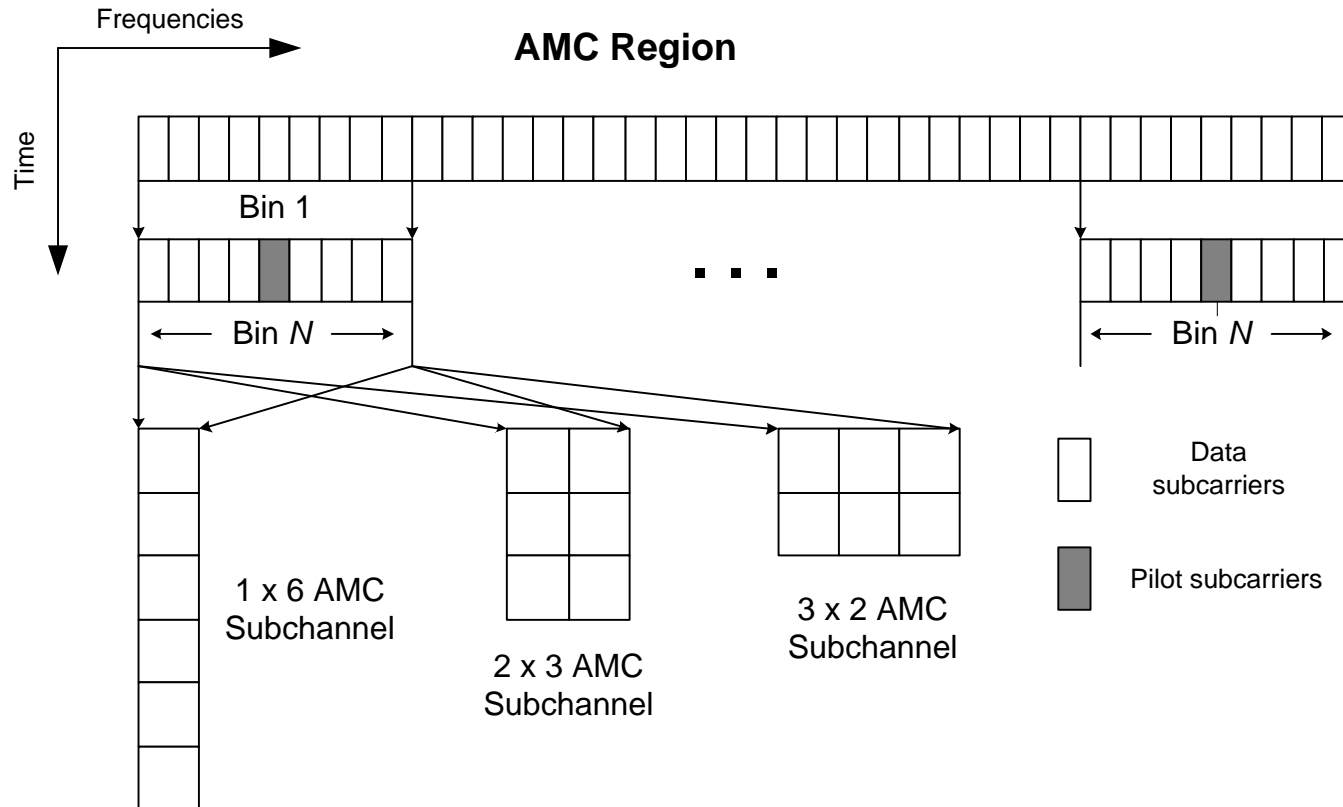



# Data rate Mbps

Bandwidth	10 MHz with FFT size 1024							
Subchannelization Method	FUSC / Band AMC				PUSC			
Number of data subcarriers	768 for downlink				720 for downlink & 560 for uplink			
Cyclic Prefix	1/4	1/8	1/16	1/32	1/4	1/8	1/16	1/32
QPSK R1/2 DL	3.920	4.356	4.612	4.752	3.675	4.083	4.324	4.455
QPSK R1/2 UL	1.260	1.400	1.482	1.527	919	1.021	1.081	1.114
QPSK R3/4 DL	5.880	6.533	6.918	7.127	4.900	5.444	5.765	5.939
QPSK R3/4 UL	1.890	2.100	2.224	2.291	1.225	1.361	1.441	1.485
16QAM R1/2 DL	7.840	8.711	9.224	9.503	5.513	6.125	6.485	6.682
16QAM R1/2 UL	2.520	2.800	2.965	3.055	1.378	1.531	1.621	1.670
16QAM R3/4 DL*	11.760	13.067	13.835	14.255	7.350	8.167	8.647	8.909
16QAM R3/4 UL	3.780	4.200	4.447	4.582	1.838	2.042	2.162	2.227
64QAM R2/3 DL	15.680	17.422	18.447	19.006	9.800	10.889	11.529	11.879
64QAM R2/3 UL	5.040	5.600	5.929	6.109	2.450	2.722	2.882	2.970
64QAM R3/4 DL	17.640	19.600	20.753	21.382	11.025	12.250	12.971	13.364
64QAM R3/4 UL	5.670	6.300	6.671	6.873	2.756	3.063	3.243	3.341
64QAM R5/6 DL	19.600	21.778	23.059	23.758	11.025	12.250	12.971	13.364
64QAM R5/6 UL	6.300	7.000	7.412	7.636	2.756	3.063	3.243	3.341

# Ρυθμοί μετάδοσης Mbps

Bandwidth	20 MHz με μέγεθος FFT 2048							
Subchannelization Method	FUSC / Optional UL PUSC / Band AMC				PUSC			
Number of data subcarriers	1536 for downlink & for uplink				1440 for downlink & 1120 for uplink			
Cyclic Prefix	1/4	1/8	1/16	1/32	1/4	1/8	1/16	1/32
QPSK R1/2 DL	7.840	8.711	9.224	9.503	7.350	8.167	8.647	8.909
QPSK R1/2 UL	2.520	2.800	2.965	3.055	1.838	2.042	2.162	2.227
QPSK R3/4 DL	11.760	13.067	13.835	14.255	11.025	12.250	12.971	13.364
QPSK R3/4 UL	3.780	4.200	4.447	4.582	2.756	3.063	3.243	3.341
16QAM R1/2 DL	15.680	17.422	18.447	19.006	14.700	16.333	17.294	17.818
16QAM R1/2 UL	5.040	5.600	5.929	6.109	3.675	4.083	4.324	4.455
16QAM R3/4 DL*	23.520	26.133	27.671	28.509	22.050	24.500	25.941	26.727
16QAM R3/4 UL	7.560	8.400	8.894	9.164	5.513	6.125	6.485	6.682
64QAM R2/3 DL	31.360	34.844	36.894	38.012	29.400	32.667	34.588	35.636
64QAM R2/3 UL	10.080	11.200	11.859	12.218	7.350	8.167	8.647	8.909
64QAM R3/4 DL	35.280	39.200	41.506	42.764	33.075	36.750	38.912	40.091
64QAM R3/4 UL	11.340	12.600	13.341	13.745	8.269	9.188	9.728	10.023
64QAM R5/6 DL	39.200	43.556	46.118	47.515	36.750	40.833	43.235	44.545
64QAM R5/6 UL	12.600	14.000	14.824	15.273	9.187	10.208	10.809	11.136




# QoS in LTE / LTE-A



# Quality of Service (QoS)


## ▶ QoS classes

- ▶ Different services - different QoS parameters
- ▶ Resources are not infinite! Thus, guaranteeing different QoS levels is a fundamental procedure in any system.

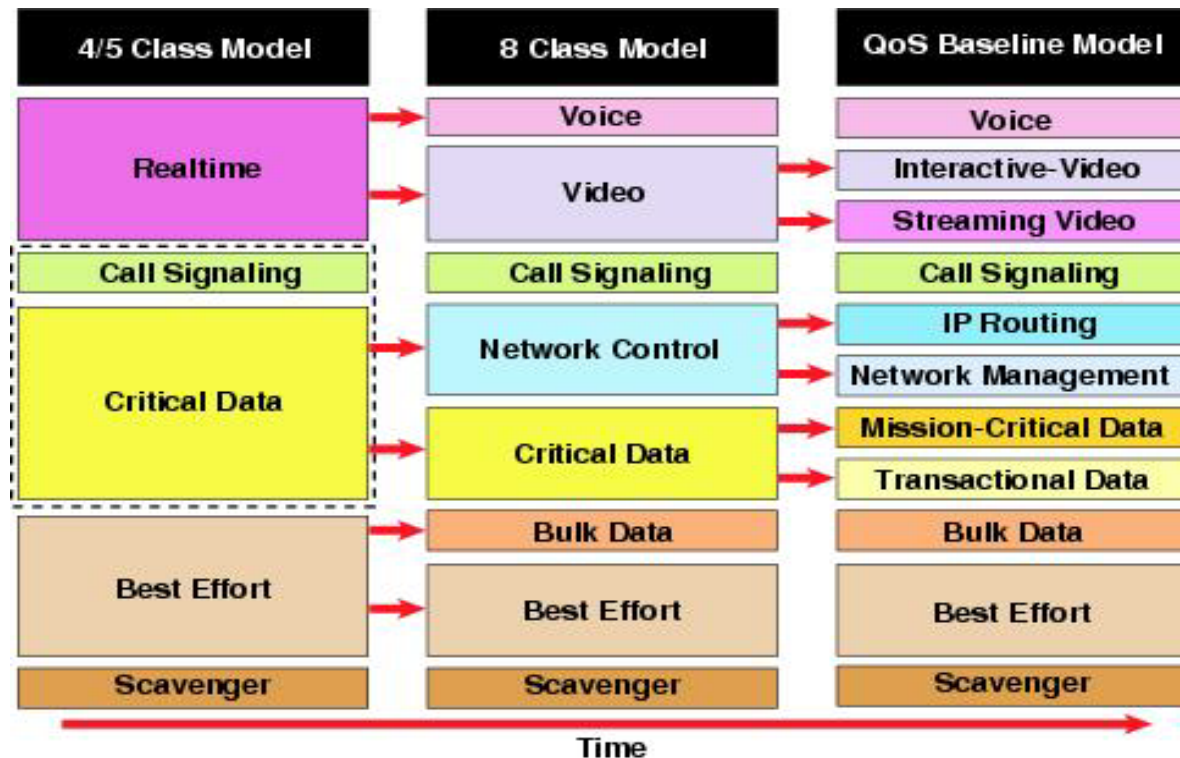

# QoS in LTE/LTE-A

## ▶ LTE-A network Architecture

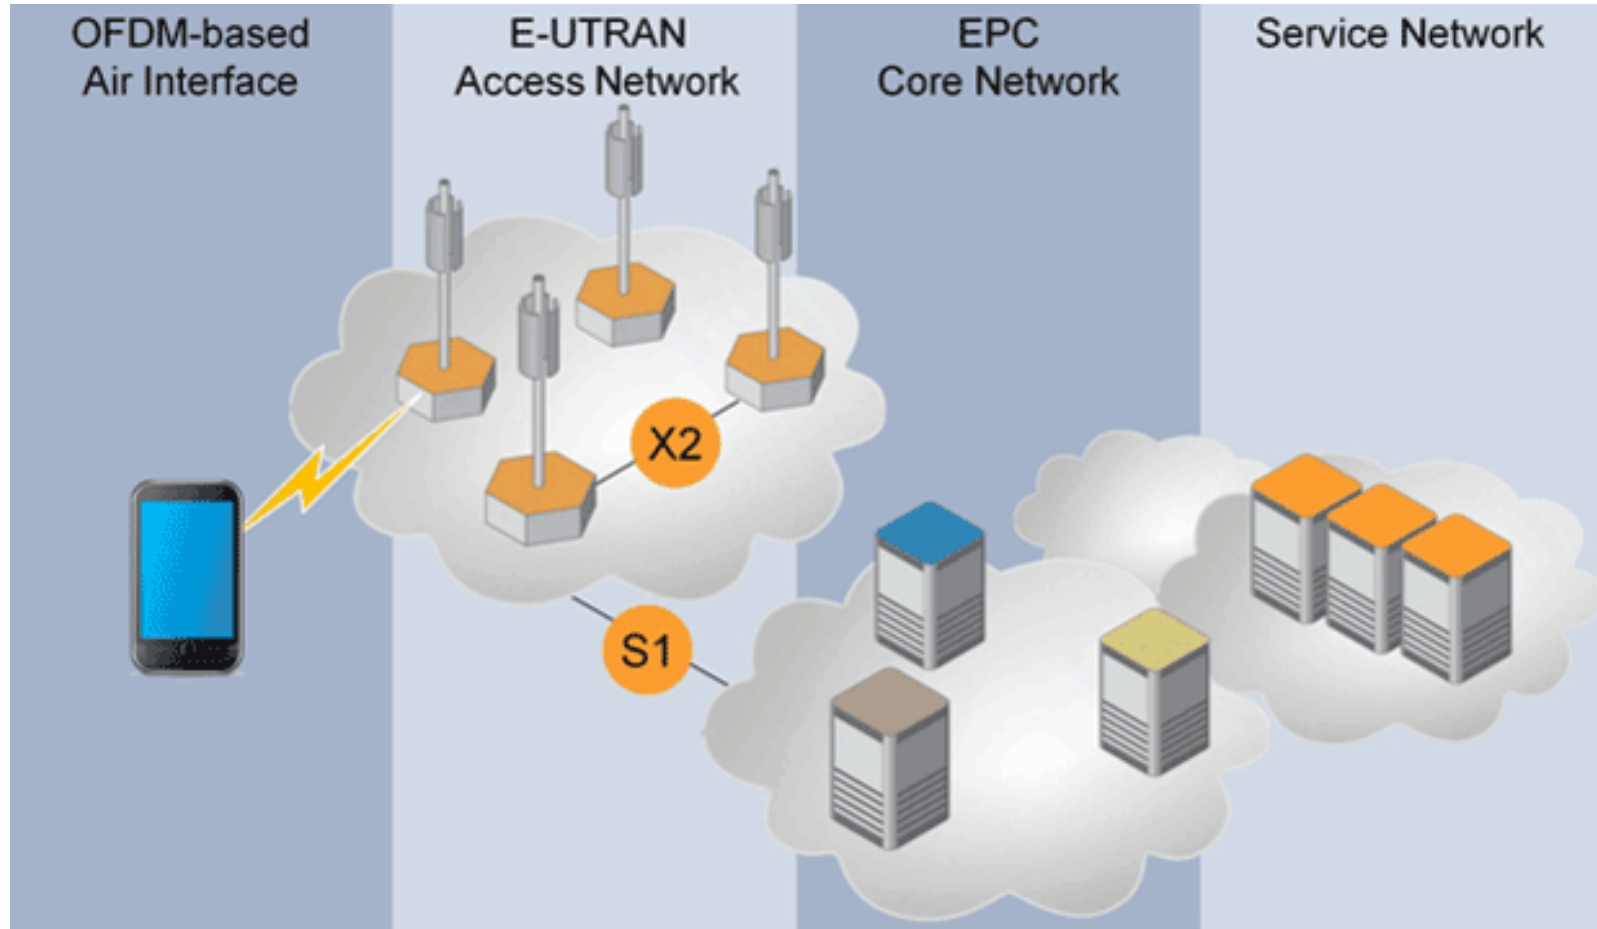


LTE Architecture



# QoS in LTE/LTE-A

## ► EPS-bearer

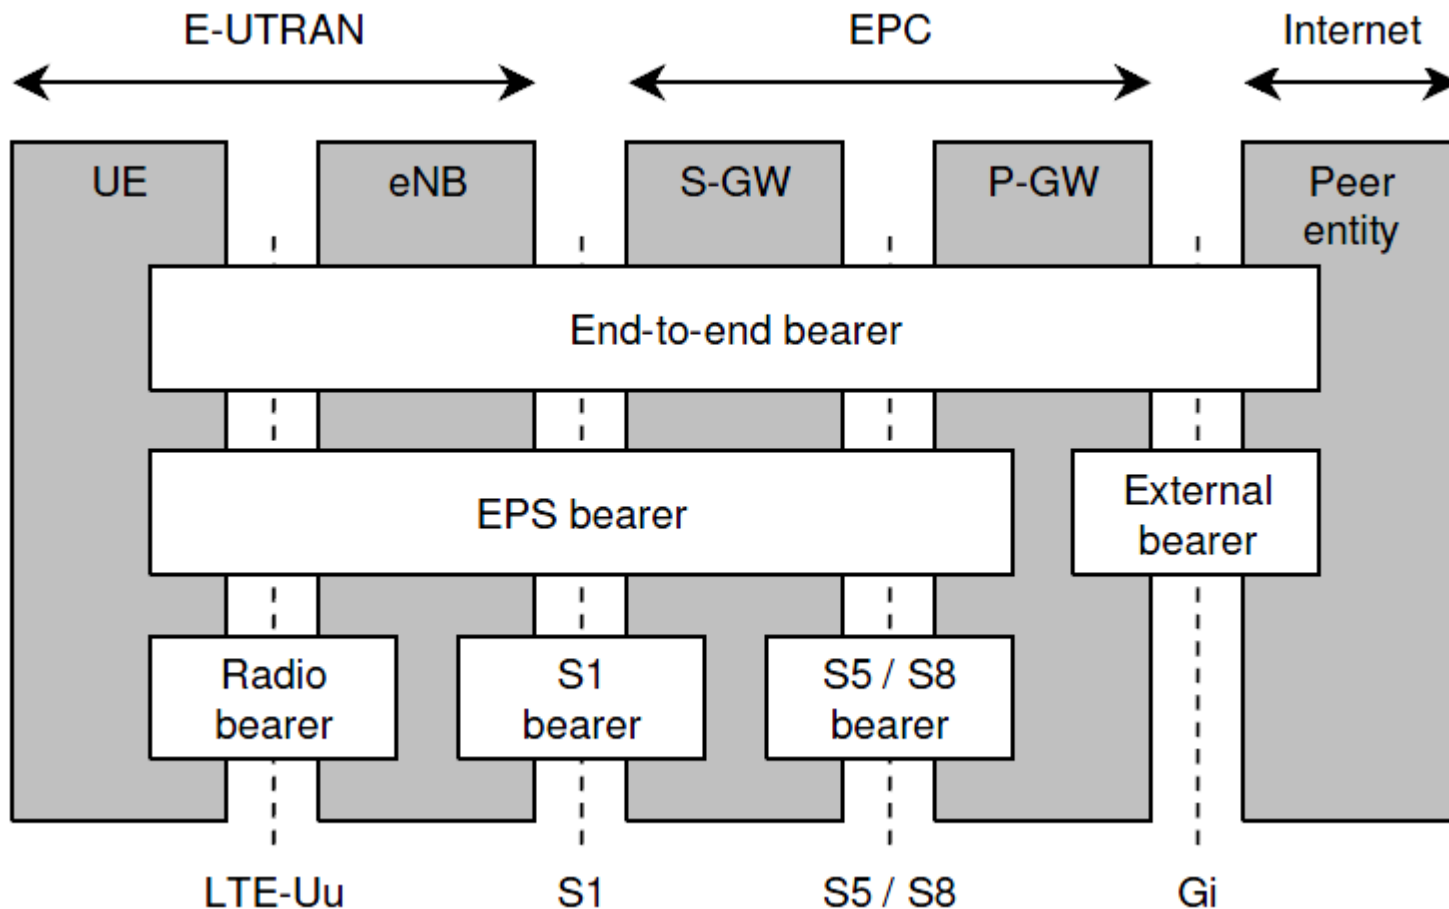



# QoS in LTE/LTE-A

- ▶ Each EPS bearer is associated with the following QoS parameters:
  - ▶ **QoS class identifier (QCI):** This is a number which describes the error rate and delay that are associated with the service.
  - ▶ **Allocation and retention priority (ARP):** This determines whether a bearer can be dropped if the network gets congested, or whether it can cause other bearers to be dropped. Emergency calls might be associated with a high ARP, for example.



## QoS in LTE/LTE-A

- ▶ There are a few different types of EPS bearer. One classification refers to quality of service:
  - ▶ A **GBR bearer** has a guaranteed bit rate (GBR) amongst its quality-of-service parameters. A GBR bearer would be suitable for a conversational service, such as a voice call.
  - ▶ A **non-GBR bearer** does not have a guaranteed bit rate. A non-GBR bearer would be suitable for a background service, such as Email.

# QoS in LTE/LTE-A

QCI	Resource type	Priority	Packet delay budget	Packet error loss rate	Example services
1	GBR	2	100 ms	$10^{-2}$	Conversational voice
2		4	150 ms	$10^{-3}$	Conversational video (live streaming)
3		3	50 ms	$10^{-3}$	Real time gaming
4		5	300 ms	$10^{-6}$	Non-conversational video (buffered streaming)
5	Non-GBR	1	100 ms	$10^{-3}$	IMS signaling
6		6	300 ms	$10^{-6}$	Video (buffered streaming) TCP-based (e.g., www, e-mail, chat, ftp, p2p file sharing, progressive video, etc.)
7		7	100 ms	$10^{-6}$	Voice, Video (live streaming), Interactive gaming
8		8	300ms	$10^{-3}$	Video (buffered streaming) TCP-based (e.g., www, e-mail, chat, ftp, p2p file sharing, progressive video, etc.)
9		9		$10^{-6}$	

\*IP Multimedia Subsystem (IMS)





# QoS in LTE/LTE-A

## To summarize...

- ▶ Guaranteeing different QoS levels is a fundamental procedure in any system.
- ▶ QoS in LTE/LTE-A system
  - ▶ LTE/LTE-A network use bearers to carry information from one part of the system to the other
  - ▶ Data are carried by EPS – bearers
  - ▶ There are different EPS – bearers for different **QoS**
  - ▶ A QoS-based classification is: GBR and non-GBR EPS – bearers


The question which arises is whether guaranteeing QoS is enough?



# QoS in WiMAX / WiMAX2



# Service Flow vs Connection

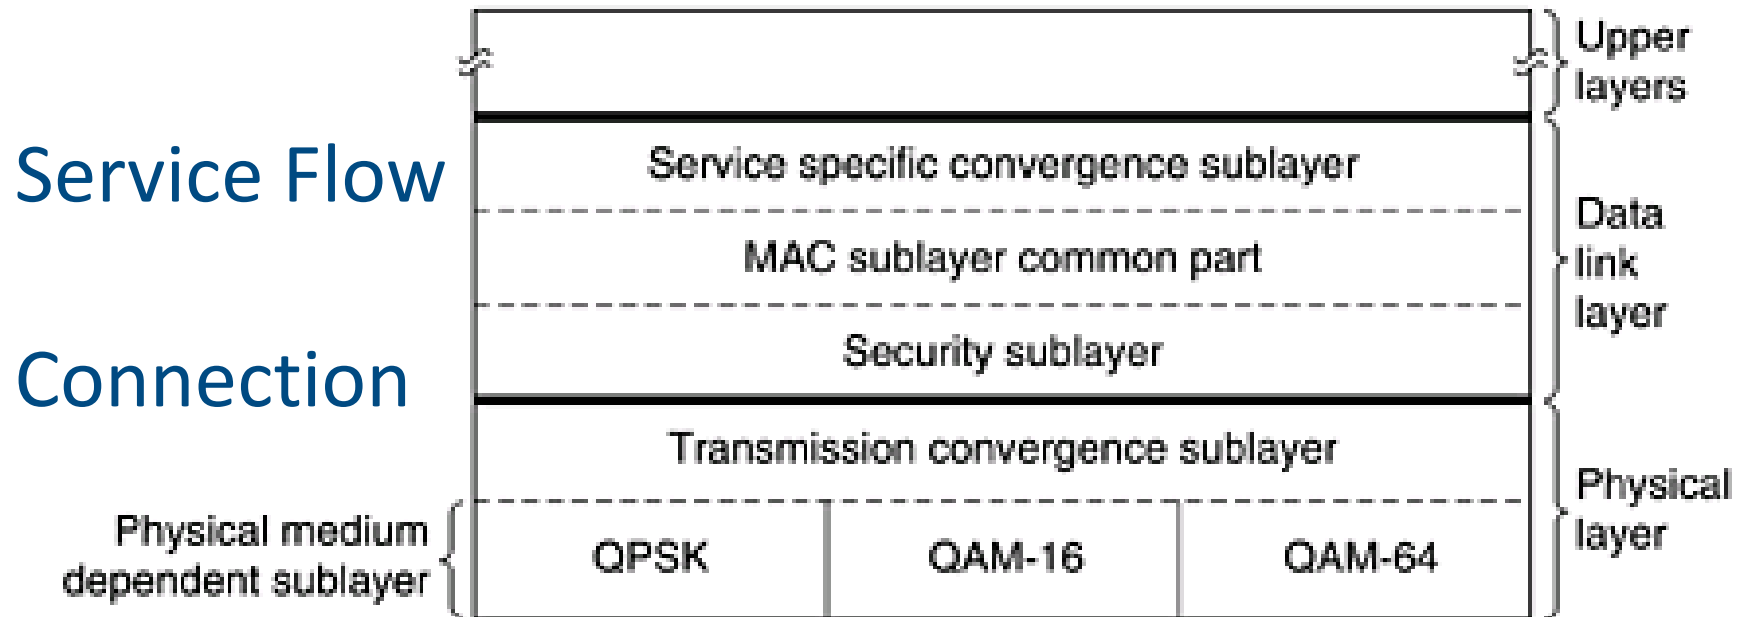



# Most important QoS parameters

1. **Minimum Reserved Traffic Rate - mrtr (in bits/sec)**
2. **Maximum Sustained Traffic Rate - mstr (in bits/sec)**
3. **Maximum Latency (in ms)**
4. *Uplink grant scheduling type*
5. **Tolerated Jitter (minimum delay in  $\epsilon$  ms)**
6. **GrantSize\_primary (aGP:  $\neq 6B \rightarrow rtPS$ ,  $= 6B \rightarrow ertPS$ )**
7. *Traffic Priority (range 0-7, with 7 the highest)*
8. *Unsolicited Grant Interval*
9. *Unsolicited Polling Interval*
10. *Request/Transmission Policy (range 0-7)*



# QoS Types & their parameters

QoS Type	Applications	QoS parameters
<b>UGS</b> Unsolicited Grant Service	Voice over IP (VoIP) without silence suppression	<ul style="list-style-type: none"> <li>• <i>Max Sustained Traffic Rate,</i></li> <li>• <i>Maximum Latency,</i></li> <li>• <i>Tolerated Jitter,</i></li> <li>• <i>Uplink grant scheduling type,</i></li> <li>• <i>Unsolicited Grant Interval,</i></li> <li>• <i>Request/Transmission Policy</i></li> </ul>
<b>rtPS</b> Real-Time Packet Service	Streaming audio & video, MPEG (Motion Picture experts Group) encoded	<ul style="list-style-type: none"> <li>• <i>Max Sustained Traffic Rate,</i></li> <li>• <i>Min Reserved Traffic Rate,</i></li> <li>• <i>Maximum Latency,</i></li> <li>• <i>Uplink grant scheduling type,</i></li> <li>• <i>Unsolicited Polling Interval</i></li> <li>• <i>Request/Transmission Policy</i></li> </ul>
<b>ertPS</b> Extended Real-Time Packet Service	VoIP with silence suppression	<ul style="list-style-type: none"> <li>• <i>Max Sustained Traffic Rate,</i></li> <li>• <i>Min Reserved Traffic Rate,</i></li> <li>• <i>Maximum Latency,</i></li> <li>• <i>Tolerated Jitter,</i></li> <li>• <i>Uplink grant scheduling type,</i></li> <li>• <i>Unsolicited Grant Interval,</i></li> <li>• <i>Request/Transmission Policy</i></li> </ul>
<b>aGP*</b> Adaptive granting and polling service	VoIP with or without silence suppression	<ul style="list-style-type: none"> <li>• <i>Max Sustained Traffic Rate,</i></li> <li>• <i>Min Reserved Traffic Rate,</i></li> <li>• <i>Maximum Latency,</i></li> <li>• <i>Tolerated Jitter,</i></li> <li>• <i>GrantSize_primary,</i></li> <li>• <i>Uplink grant scheduling type,</i></li> <li>• <i>Unsolicited Grant Interval,</i></li> <li>• <i>Request/Transmission Policy</i></li> </ul>
<b>nrtPS</b> Non-Real-Time Packet Service	File Transfer Protocol (FTP)	<ul style="list-style-type: none"> <li>• <i>Max Sustained Traffic Rate,</i></li> <li>• <i>Min Reserved Traffic Rate,</i></li> <li>• <i>Traffic Priority</i></li> <li>• <i>Uplink grant scheduling type,</i></li> <li>• <i>Unsolicited Polling Interval,</i></li> <li>• <i>Request/Transmission Policy</i></li> </ul>
<b>BE</b> Best Effort Service	Data transfer, Web Browsing, e.t.c.	<ul style="list-style-type: none"> <li>• <i>Max Sustained Traffic Rate,</i></li> <li>• <i>Traffic Priority</i></li> <li>• <i>Uplink grant scheduling type,</i></li> <li>• <i>Unsolicited Polling Interval,</i></li> <li>• <i>Request/Transmission Policy</i></li> </ul>



# Resource Allocation / Scheduling Algorithms



# Scheduler/RA's role


- **Who transmits / receives**
- **What is transmitted by whom**
- **When each one transmits / receives**
  - *For Single Carrier (e.g. TDD): in which timeslots*
  - *For OFDM: in which carriers*
  - *For OFDMA: in which time slots or resource blocks*
    - *For SC-OFDMA with what power*






# Dimensionize Resource Management

Spectrum

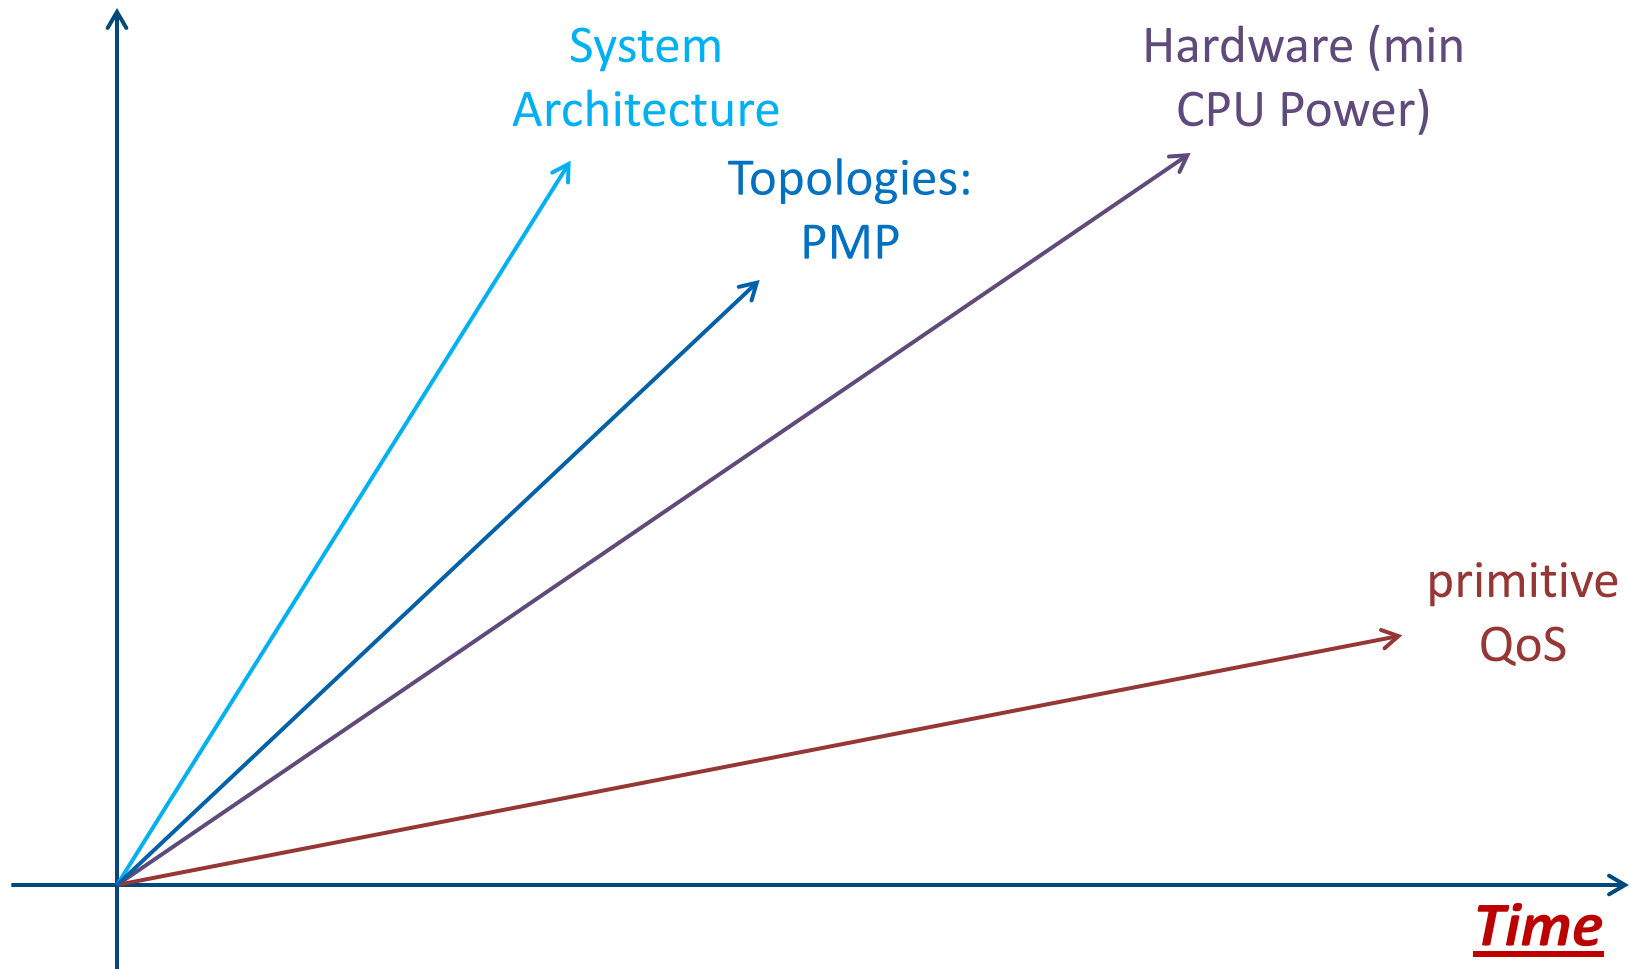




# Round Robin

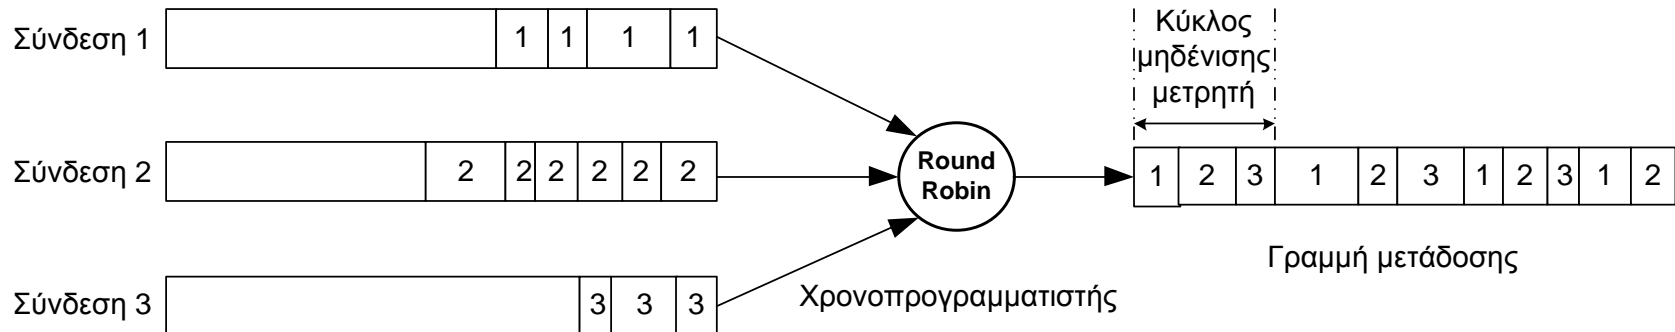


# Weighted Round Robin

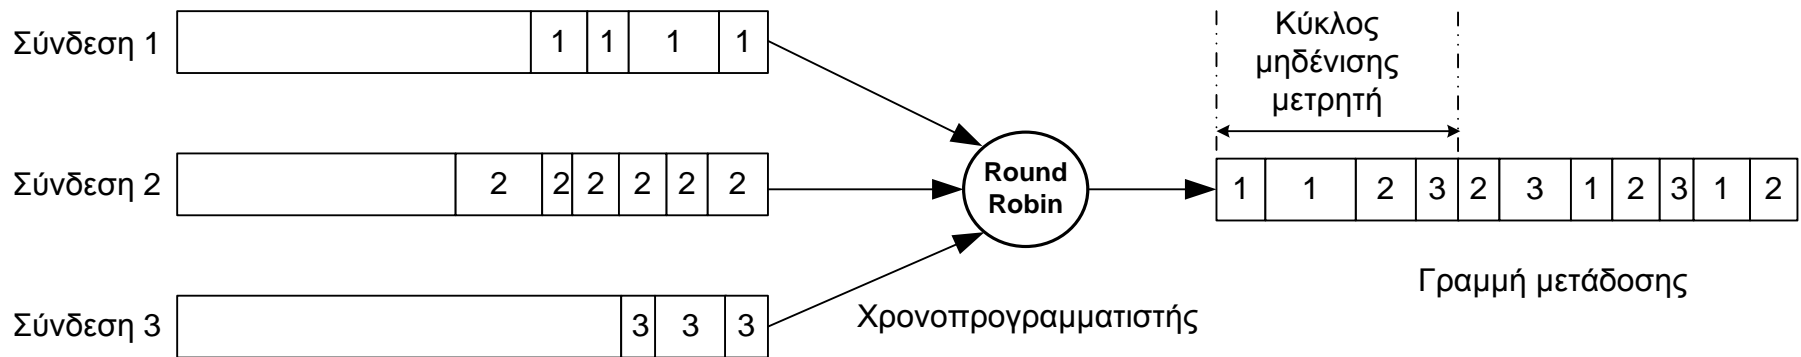



# Deficit Round Robin


- For each connection:
  - Deficit counter
  - Quantum size

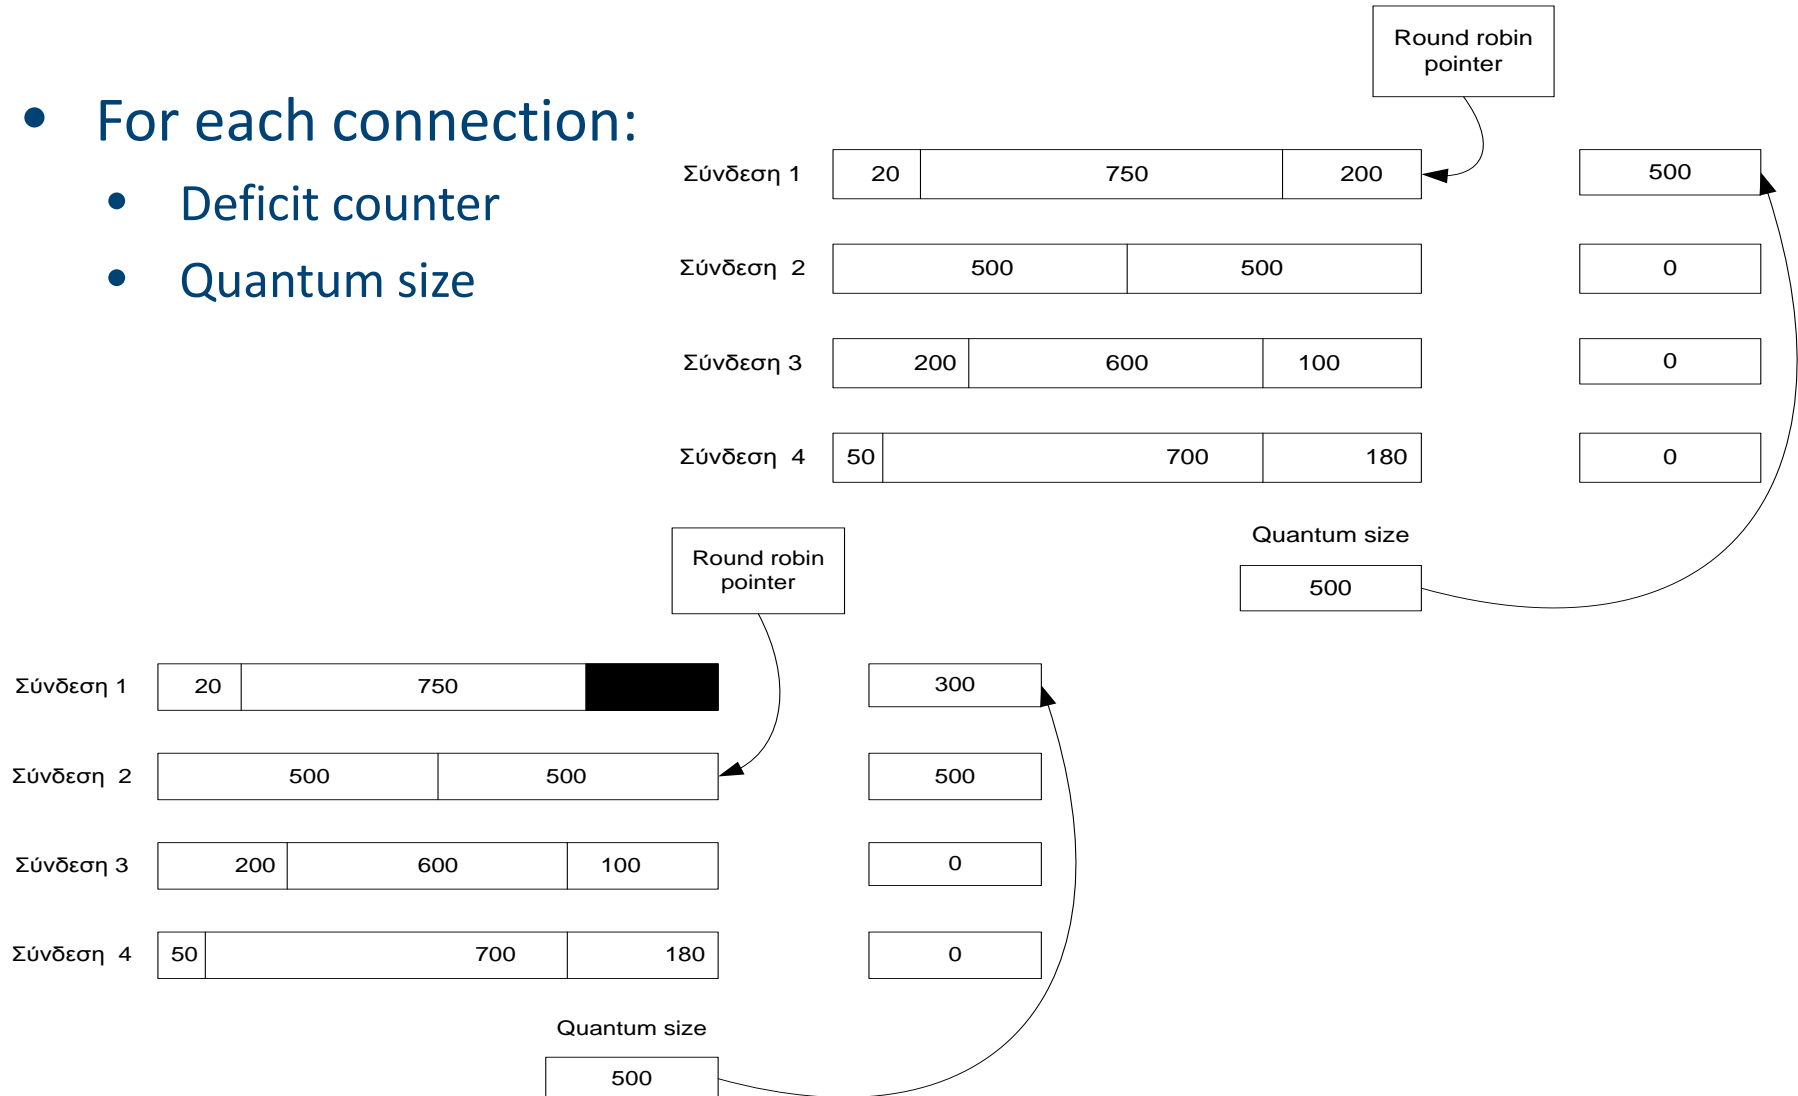



# Dimensionize Resource Management

Spectrum

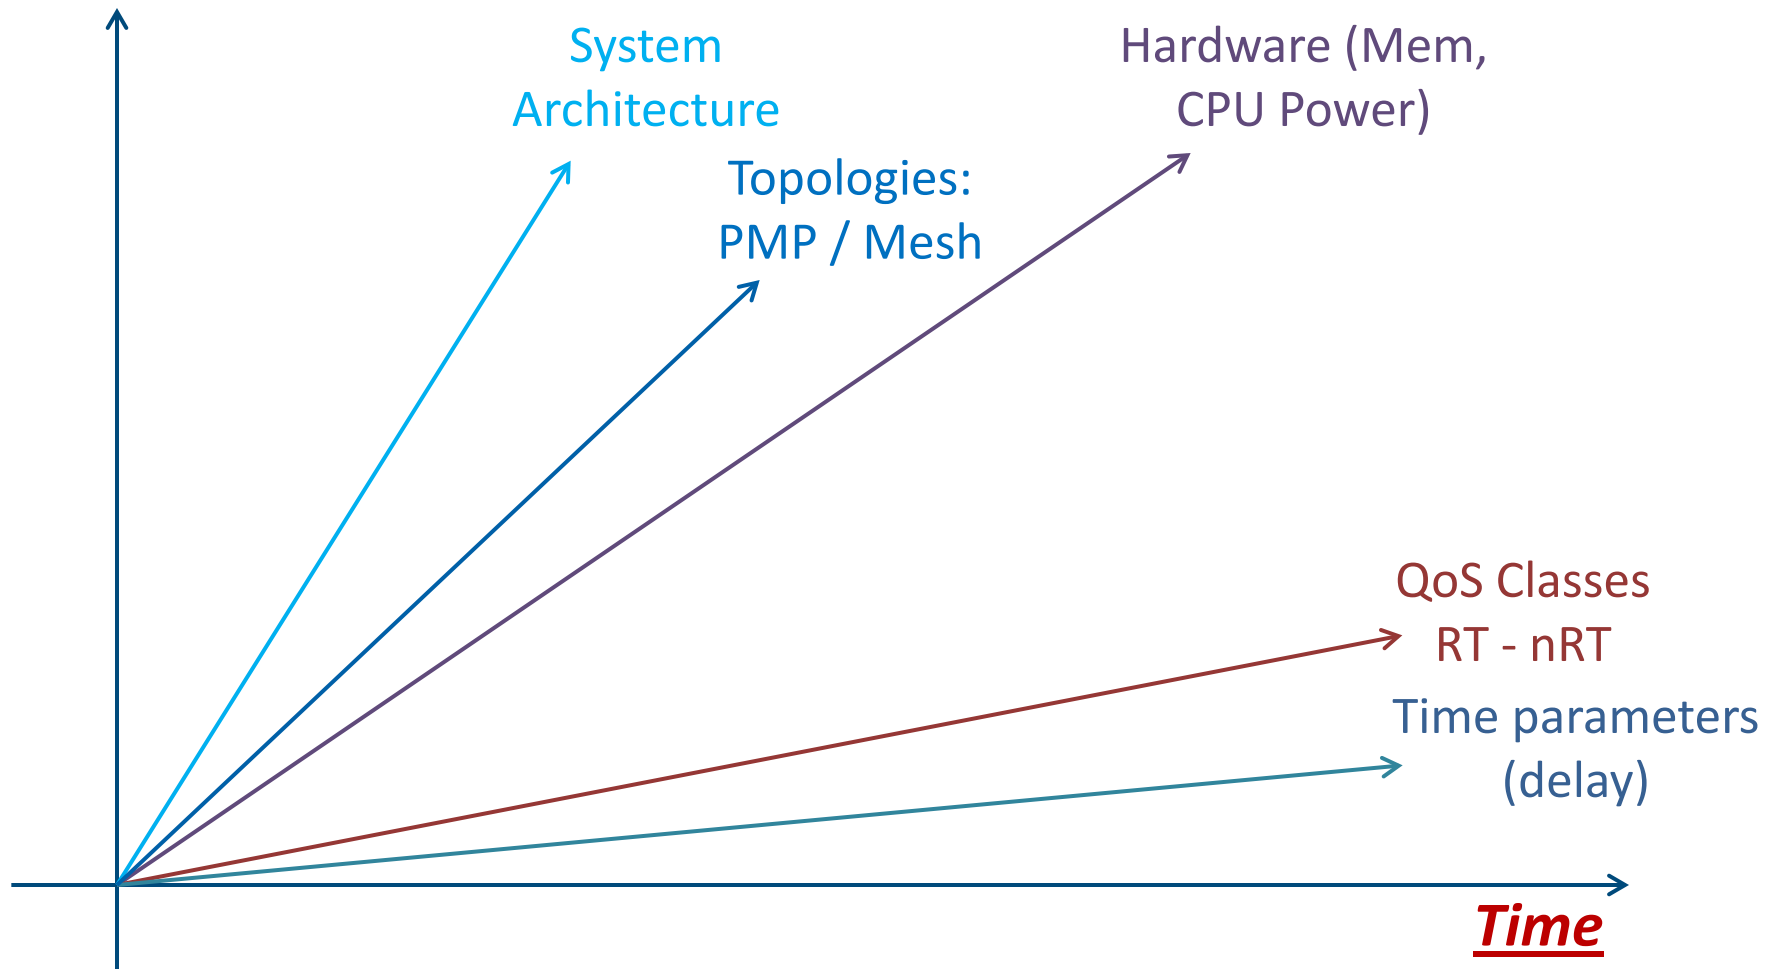



# Weighted Fair Queue (WFQ) -1

- Packets from each queue categorized in different logical queues
- A ideal scheduler (GPS) is responsible to server not empty queues (bypassing empty ones)
- Computes necessary time for serving each packet
- In each scan uses a very small amount of data from each queue
- In certain period of time should have visited each queue at least once
- Serves packets in ascending order of expiration time

***In other words: WFQ simulates a GPS Scheduler, using simulation results to specify the sequence of future served packets***



## Weighted Fair Queue (WFQ) -2

WFQ computes packets' expiration time using the following variables:

**$R(t)$**  : Round number in time  $t$  (# rounds that bit-by-bit Round Robin Scheduler has completed)

**$P(i,k,t)$**  : Length of packet  $k$ , comes in queue  $i$  in time  $t$

**$F(i,k,t)$**  : Expiration time of packet  $k$ , comes in queue  $i$  in time  $t$


**$W(i)$**  : Weight of  $i$  connection

**Active queue**: A queue with packets' greatest expiration time ( $F(i,k,t)$ ) being larger than current Round Number ( $R(t)$ )

Round length (serve 1bit from each queue) is relative to the number of active queues

$$F(i, k, t) = \max \{ F(i, k - 1, t), R(t) \} + \frac{P(i, k, t)}{W(i)}$$

# Weighted Fair Queue (WFQ) -3

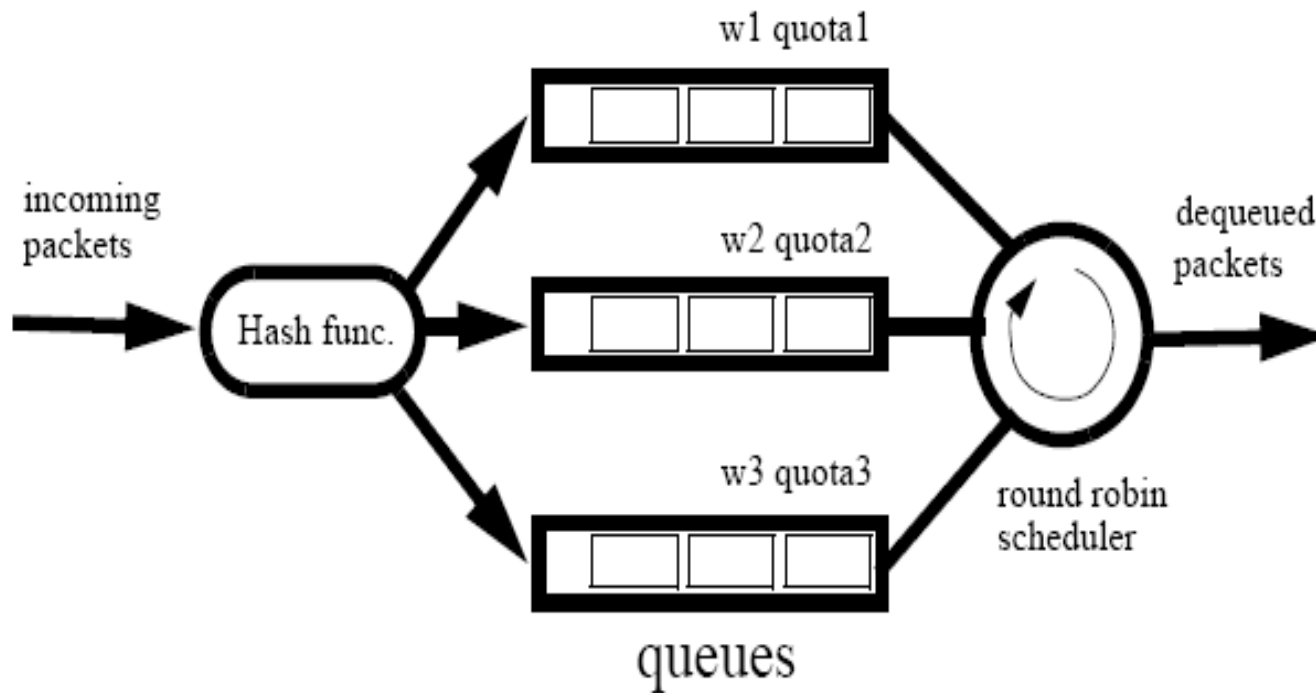





# Modified Earliest Deadline First (MEDF)-1





- Modifies appropriately EDF
- Packets are stored in  $n$  queues using FIFO
- Each packet is marked with a expiration time limit  
 $ETL = Arrival\_Time + M_i, 0 \leq i < n$  ( $M_i$  characteristic  $\forall$  TSC)

## *In other words:*

- *MEDF does a local re-sorting in a FIFO queue*
- *The maximum latency limit between two queues specifies when a re-sorting will happen, & must be less than latency*



# Modified Earliest Deadline First (MEDF)-2

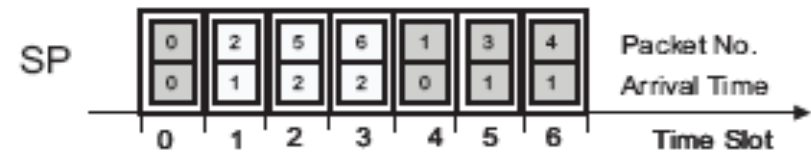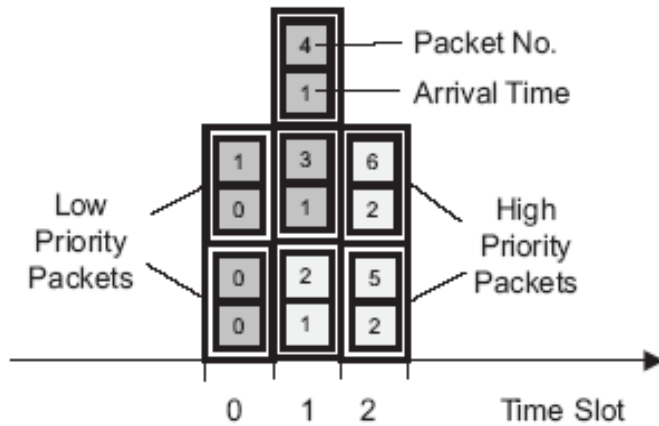


## **MEDF :**

- *Has better performance than FIFO, SP, WRR under any circumstances*
- *Compared to WFQ, does not need overall network traffic knowledge*




# Dimensionize Resource Management

Spectrum

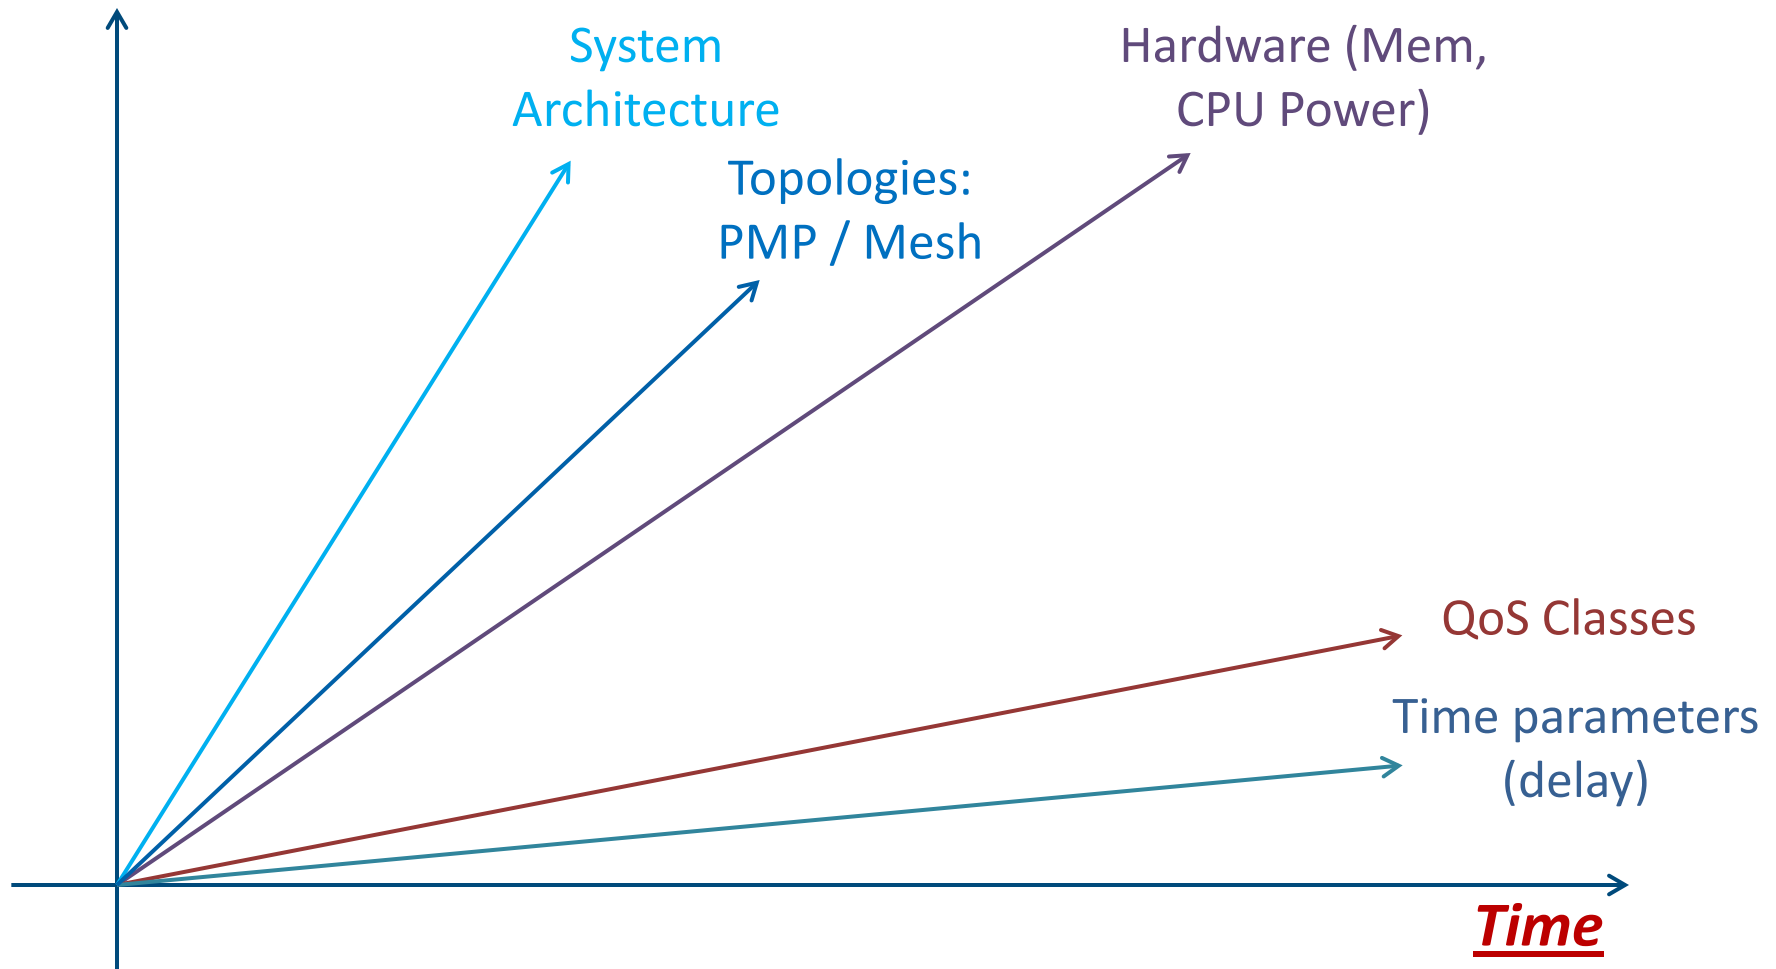



# “Packet scheduling for QoS support in IEEE 802.16 broadband wireless access systems”

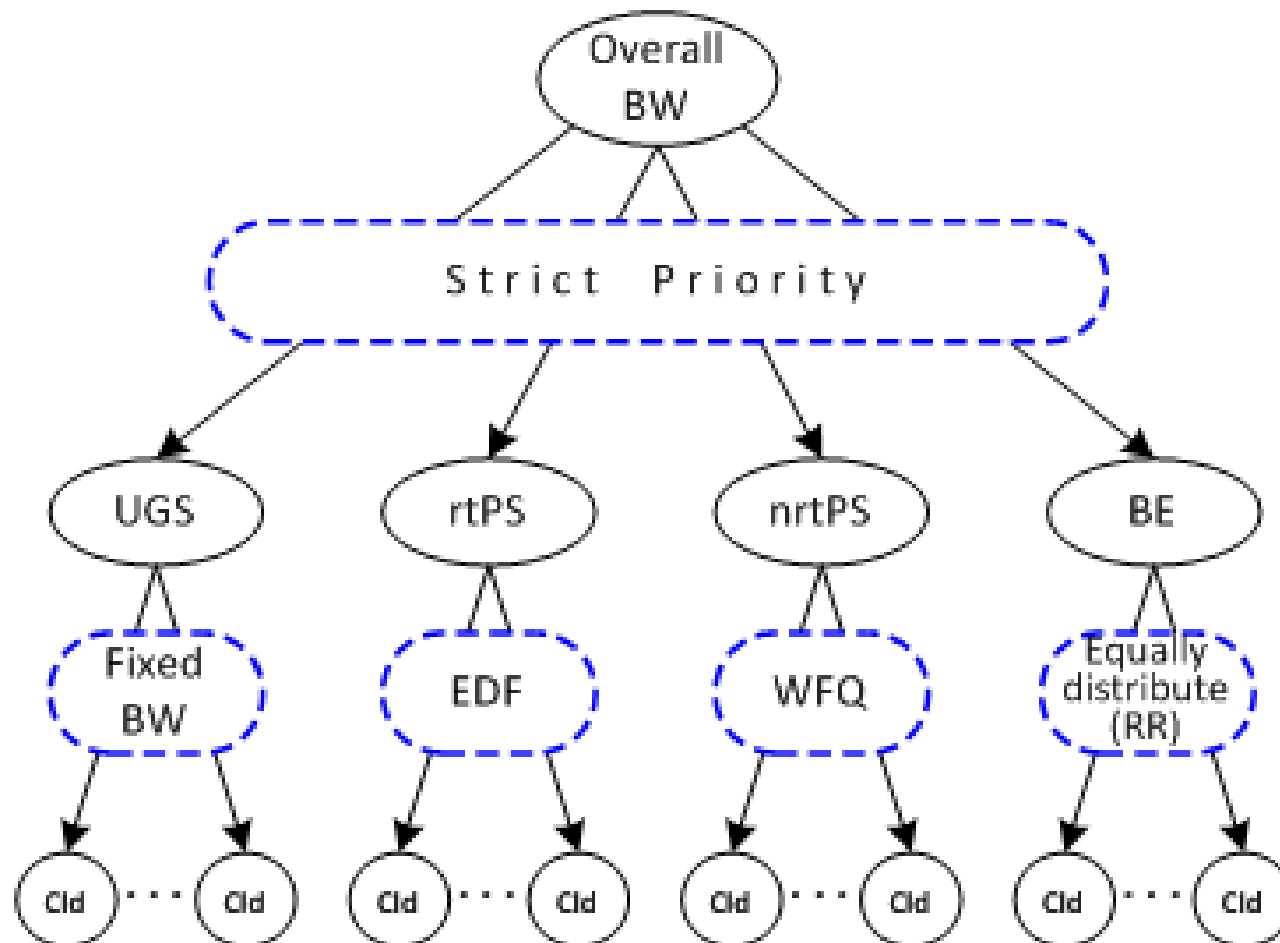




α/α	Paper	Aim		SC	OFDMA	AMC	PMP	Mesh	Link		QoS Classes					Delay	Jitter	ARQ	Compl. Eval.	Simul. Tool
		M.P.	Fairness						DL	UL	UGS	ertPS	rtPS	nrtPS	BE					
1	[8]	√	√	√	—	—	√	—	—	√	√	—	√	√	√	—	—	—	—	C++
2	[16]	Εκτίμηση		√	—	—	√	—	√	√	√	√	√	—	—	—	—	—	—	—
3	[17]	√	—	√	—	—	√	—	—	√	—	—	—	—	√	—	—	—	—	NS-2
4	[19]	√	—	√	—	—	√	—	√	√	—	√	—	—	√	—	—	—	√	—
5	[20]	√	—	√	—	—	√	—	—	√	—	—	—	√	—	—	—	—	—	—
6	[21]	√	√	√	—	—	√	—	√	√	√	√	√	√	√	√	—	—	—	—
7	[22]	√	—	√	—	—	√	—	√	√	√	—	√	√	√	—	—	—	—	NS-2
8	[23]	—	√	√	—	—	√	—	—	√	√	—	√	√	√	√	√	—	—	Opnet
9	[24]	√	√	√	—	—	√	—	√	√	√	√	√	√	√	—	—	—	—	Opnet
10	[26]	√	—	√	—	—	√	—	√	—	√	√	√	√	√	—	—	—	√	NS-2
11	[27]	√	—	√	—	—	√	—	√	√	—	—	√	—	√	√	—	—	—	—
12	[28]	√	√	√	—	—	√	—	—	√	√	√	√	√	√	√	—	—	—	Matlab
13	[29]	√	—	√	—	—	√	—	√	√	—	—	√	√	√	√	—	—	—	C++
14	[29]	√	√	√	—	—	√	—	√	—	√	√	√	√	√	√	√	—	—	NS-2
15	[32]	—	√	√	—	—	√	—	—	√	√	√	√	√	√	√	—	—	√	NS-2
16	[43]	—	√	—	√	—	√	—	√	—	—	—	—	—	—	—	—	√	—	—
17	[44]	√	—	—	√	—	√	—	—	√	—	—	—	—	—	—	—	—	√	—
18	[45]	√	—	—	√	—	√	—	√	—	—	—	—	—	—	—	—	—	√	—
19	[48]	√	√	—	√	—	√	—	√	√	—	—	—	—	—	—	—	—	—	—
20	[49]	√	√	—	√	—	√	—	—	√	—	—	√	√	√	√	√	—	—	—
21	[47]	√	—	—	√	—	√	—	√	—	—	—	—	—	—	—	—	—	√	—
22	[50]	√	√	—	√	—	√	—	√	—	—	—	—	—	—	√	—	—	—	—
23	[51]	—	√	—	√	√	√	—	√	√	—	—	—	—	—	—	—	—	—	—
24	[52]	√	√	—	√	—	√	—	√	—	—	—	—	—	—	—	√	√	√	—
25	[53]	√	—	—	√	—	√	—	√	—	—	—	—	—	—	—	—	—	√	C++
26	[54]	√	—	—	√	√	√	—	√	—	—	—	—	—	—	—	—	—	√	C++
27	[59]	√	√	√	√	√	√	—	√	√	√	√	√	√	√	√	—	—	—	—
28	[60]	√	—	√	√	—	—	—	√	—	—	—	√	√	—	—	—	—	—	—
29	[61]	√	—	—	√	—	√	—	—	√	—	—	—	—	—	—	—	—	—	Opnet
30	[62]	√	—	—	√	√	√	—	√	—	—	—	—	√	√	—	—	—	—	—
31	[63]	√	—	—	√	—	√	—	—	√	—	—	—	—	√	—	—	—	—	—
32	[64]	√	—	—	√	√	√	—	√	√	—	—	—	√	—	—	—	√	—	—
33	[65]	√	—	—	√	—	√	—	—	√	√	—	—	—	—	—	—	—	—	—
34	[66]	√	√	√	√	√	√	—	√	√	—	—	—	√	√	√	—	—	—	—
34	[67]	—	√	—	√	√	√	—	√	—	√	—	—	√	√	√	—	—	—	—
35	[68]	√	—	—	√	√	√	—	√	—	√	—	—	√	√	√	—	—	—	—
36	[69]	√	—	—	√	—	√	√	√	√	√	√	√	√	√	—	—	—	—	—
37	[70]	√	√	—	√	√	√	—	√	—	—	—	—	√	√	√	√	—	—	—
38	[71]	√	√	—	√	—	√	—	—	√	√	—	—	√	√	√	√	—	—	—
39	[72]	√	√	—	√	—	√	—	—	√	√	√	√	√	√	√	—	—	√	C++



# Dimensionize Resource Management

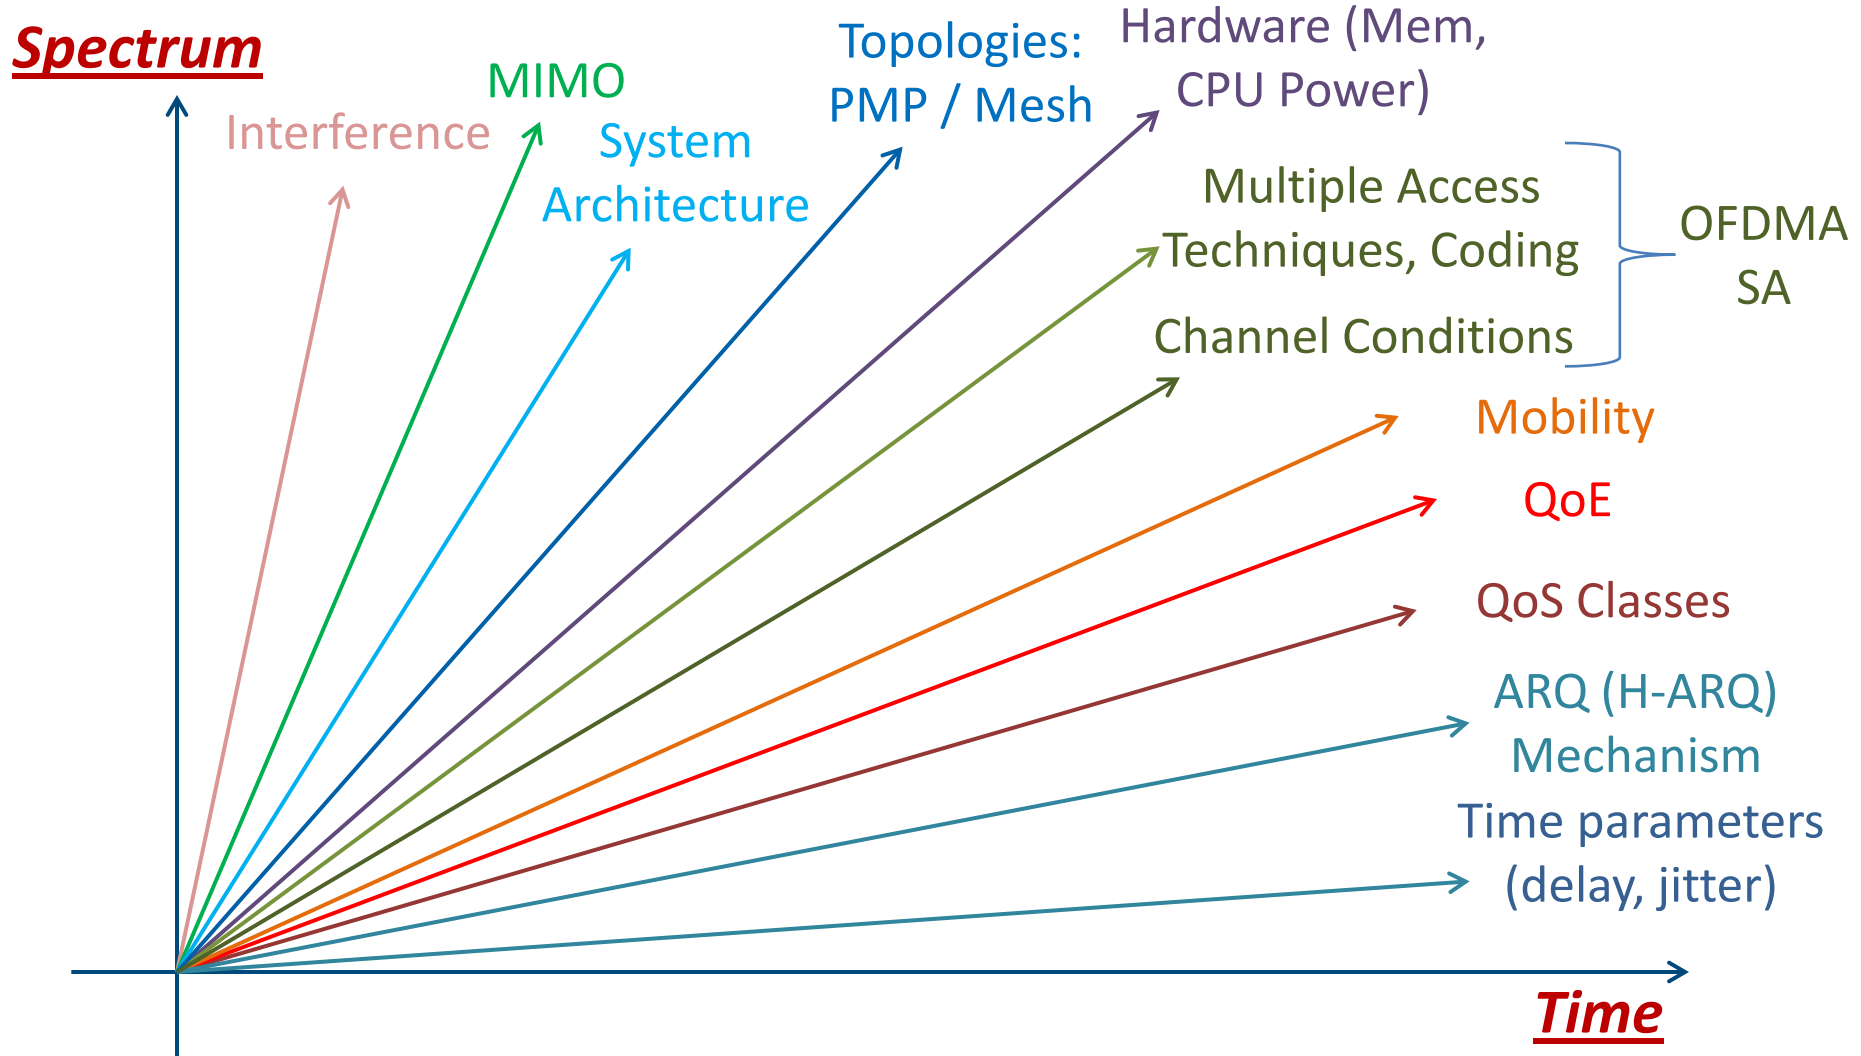


## State the problem of RA/OFDMA SA (2)

- Assignment Problem is one basic combinatorial optimization problems
- Could be reduced to finding a maximum weight matching
- In its most generic form, correlated to OFDMA SA we can consider:  
*An amount of resources that have to be allocated to number of Users*  
*Any user can use any resource creating a profit, which is proportional to couple (resource-user)*  
*It is requested the allocation of all resources, by allocating exactly one user to each resource, so as a profit maximization occurs.*

In some of its forms this problem could be reduced to a Linear Assignment Problem which can be solved by **Hungarian algorithm** with  $O(N^4)$  computational complexity.

$$\begin{pmatrix} 1 & 4 & 5 \\ 5 & 7 & 6 \\ 5 & 8 & 8 \end{pmatrix}$$

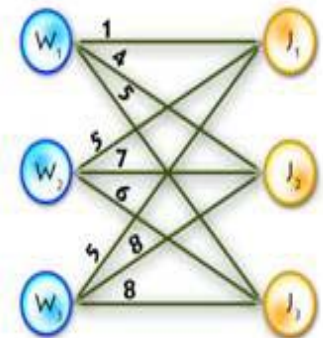






# State the problem of RA/OFDMA SA

- OFDMA-SA can be reduced to “MAXIMUM CONSTRAINED PARTITION” problem, a well known NP-Hard problem.
- Thus Y. B.-Shimol, I. Kitroser and Y. Dinitz have prove in:

[52] Y. B.-Shimol, I. Kitroser and Y. Dinitz, "Two-Dimensional Mapping for Wireless OFDMA Systems" IEEE TRANSACTIONS ON BROADCASTING, VOL. 52, NO. 3, SEPTEMBER 2006

## that OFDMA-SA is also a NP-Hard problem

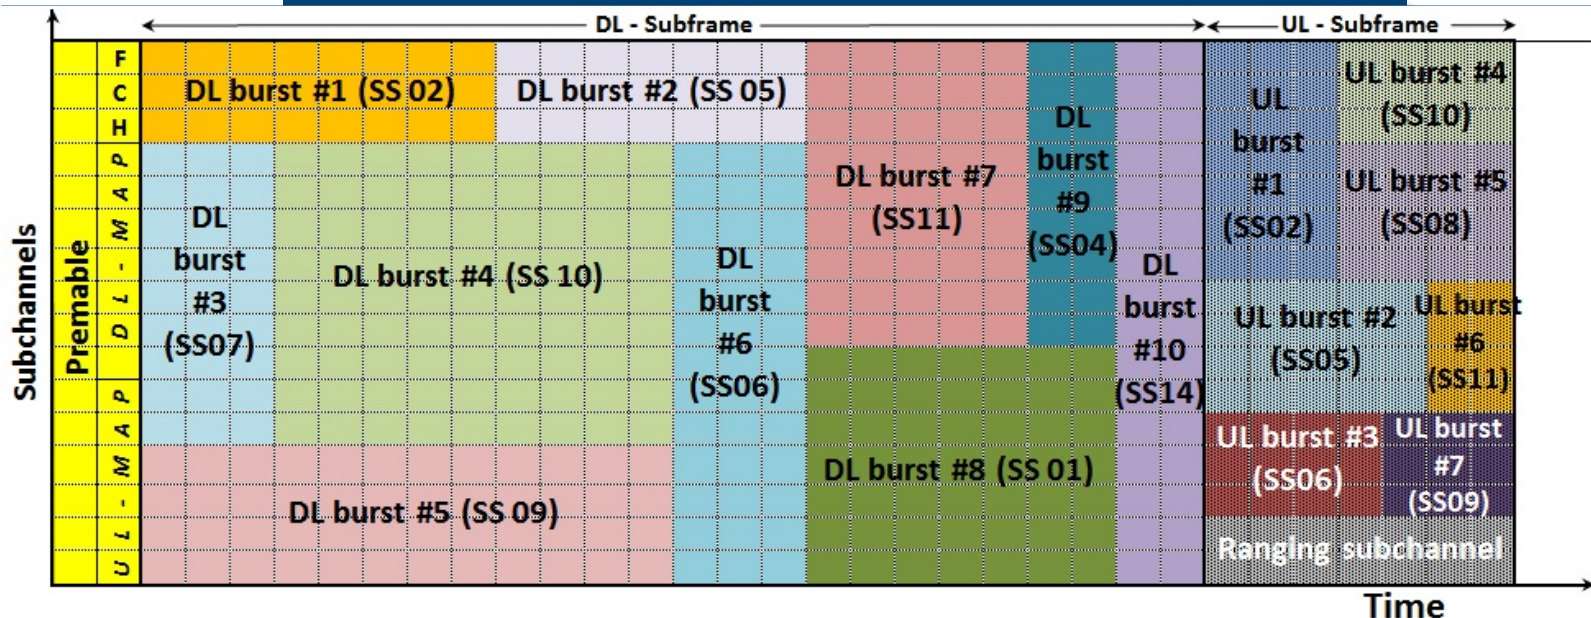



# Case Study : WiMAX

- Ideal Scheduler Characteristics
- Recently proposed solutions
- An advanced solution for WiMAX/OFDMA with demanding QoS
  - Complexity vs Memory Usage
  - Basic operations
  - The use of an advanced Tree Structure as complexity leverage
  - Subtrees
  - Simulations



# Colored OFDMA Frame Registry Tree Scheduler (CO-FRTS)




# Ideal Scheduler Characteristics

- Organize data in time (deadline, jitter, ARQ mechanism etc)
- Organize transmissions per User (MS), considering recent measurements:
  - i. available modulations & coding schemes,*
  - ii. subchannels with SINR greater than a threshold,*
  - iii. total & per User power control,*
- Data transmissions should be complied with:
  - i. Each packet deadline (arrival time + maximum latency),*
  - ii. Jitter (minimum required latency),*
  - iii. Minimum & maximum traffic rates  $\forall$  connection,*
  - iv. ARQ mechanism used (e.g. H-ARQ).*
- Organize transmissions of different QoS types with certain priority  
(e.g.  $\text{Priority}_{\text{UGS}} > \text{Priority}_{\text{ertPS}} > \text{Priority}_{\text{rtPS}} > \text{Priority}_{\text{nrtPS}} > \text{Priority}_{\text{BE}}$ )
- Required operations & necessary computational complexity, should be limited (DL-MAP & UL-MAP)
- All actions should lead to throughput maximization, (after complying with as many QoS parameters as possible)  
(by organizing transmissions by modulation (max e.g. 256QAM to BPSK))
- Any modification in Users' basic characteristics should :
  - i. the effect on scheduler's operations should be limited*
  - ii. aggravate minimum computational complexity*




# Colored OFDMA Frame Registry Tree

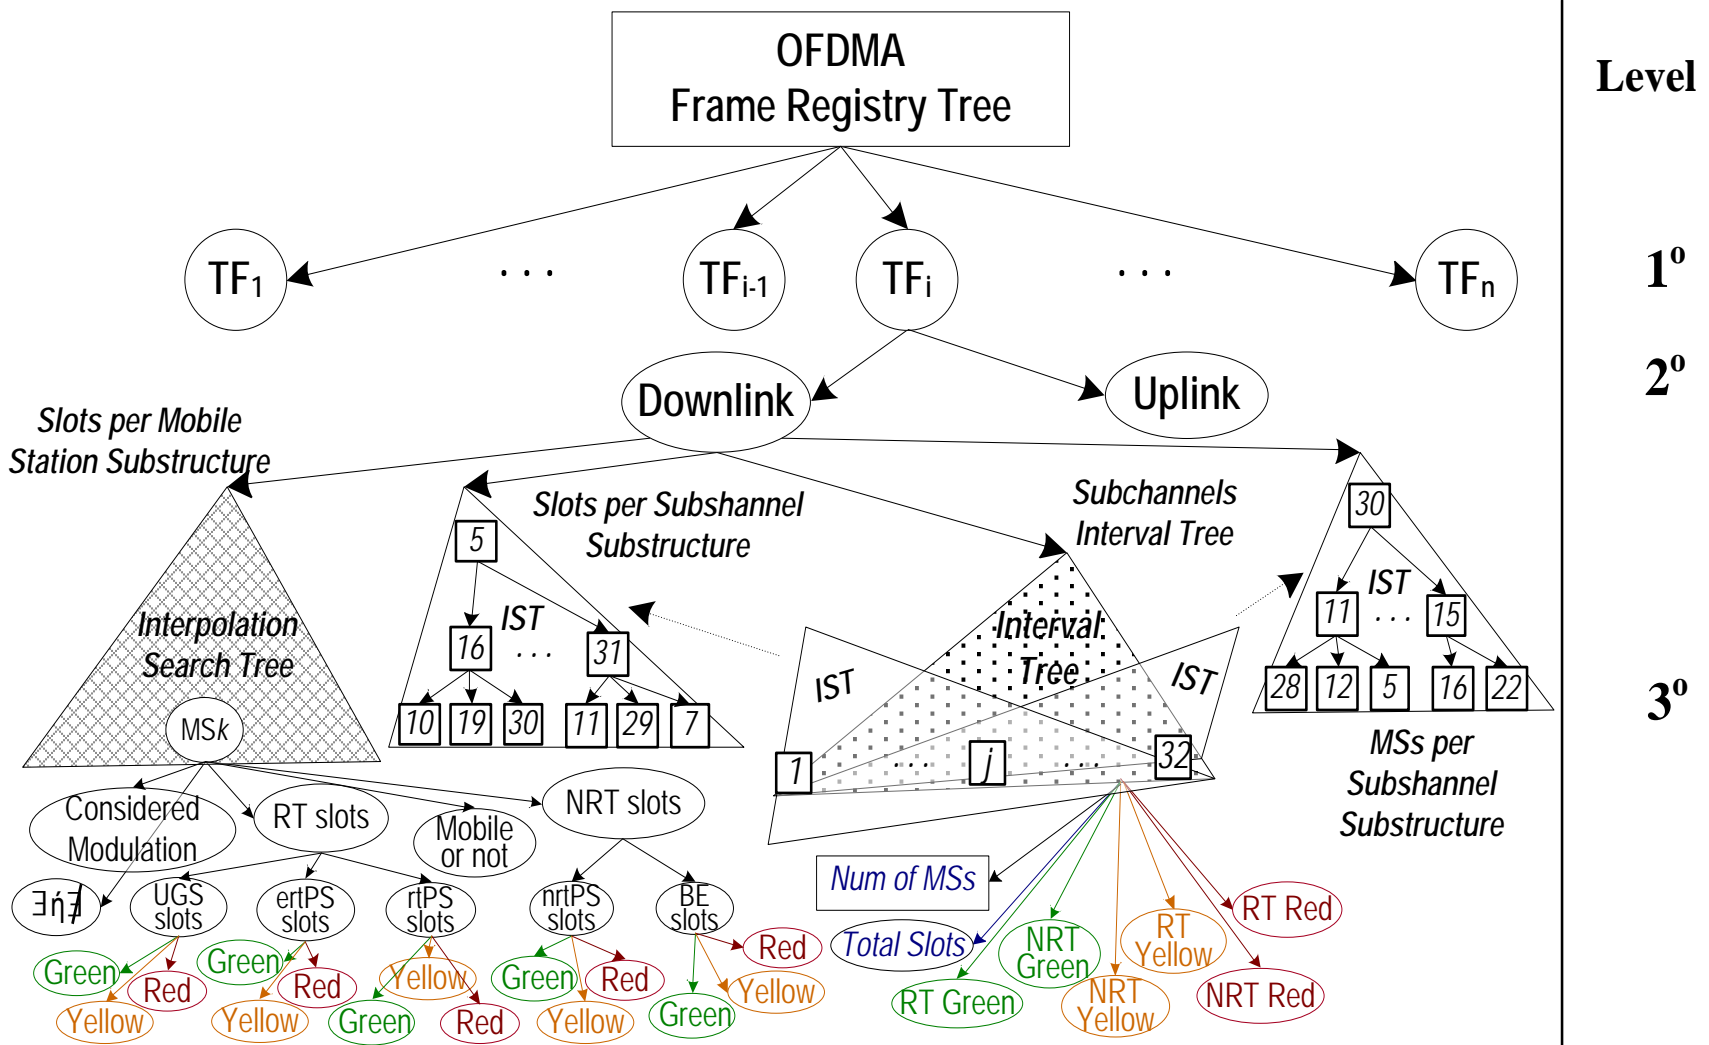





# CO-FRTree Example

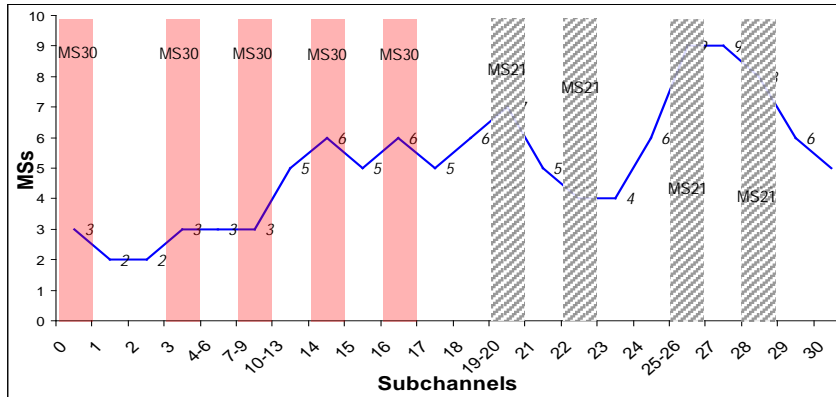

- MS01 → [17,20] ≡ (16,20)
- MS02 → [25,32] ≡ (24,32)
- MS04 → [1,9] U [14,16] ≡ (0,9) U (13,16)
- MS05 → [14, 28] ≡ (13,28)
- MS07 → [24,28] ≡ (23,28)
- MS08 → [30,32] ≡ (29,32)
- MS10 → [3,9], [14,21] ≡ (2,9) U (13,21)
- MS12 → [27,32] ≡ (26,32)
- MS14 → [16,22] U [28,32] ≡ (15,22) U (27,32)


- MS17 → [10,22] ≡ (9,22)
- MS20 → [25,29] ≡ (24,29)
- MS21 → 21 U 23 U 27 U 29 ≡ (20,21) U (22,23) U (26,27) U (28,29)
- MS22 → [24,29] ≡ (23,29)
- MS24 → [7,15] ≡ (6,15)
- MS25 → [19,23] U [27,30] ≡ (18,23) U (26,30)
- MS26 → [1,2] ≡ (0,2)
- MS28 → [21,32] ≡ (20,32)
- MS30 → 1 U [4-6] U [10-13] U 15 U 17 ≡ (0,1) U (3,6) U (9,13) U (14,15) U (16,17)

Nodes (all left open edges except zero with all right closed edges):

1,2,3,6,9,13,14,15,16,17,18,20,21,22,23,24,26,27,28,29,30,32

22 intervals:

1, 2, 3, 4-6, 7-9, 10-13, 14, 15, 16, 17, 18, 19-20, 21, 22, 23, 24, 25-26, 27, 28, 29, 30, 31-32

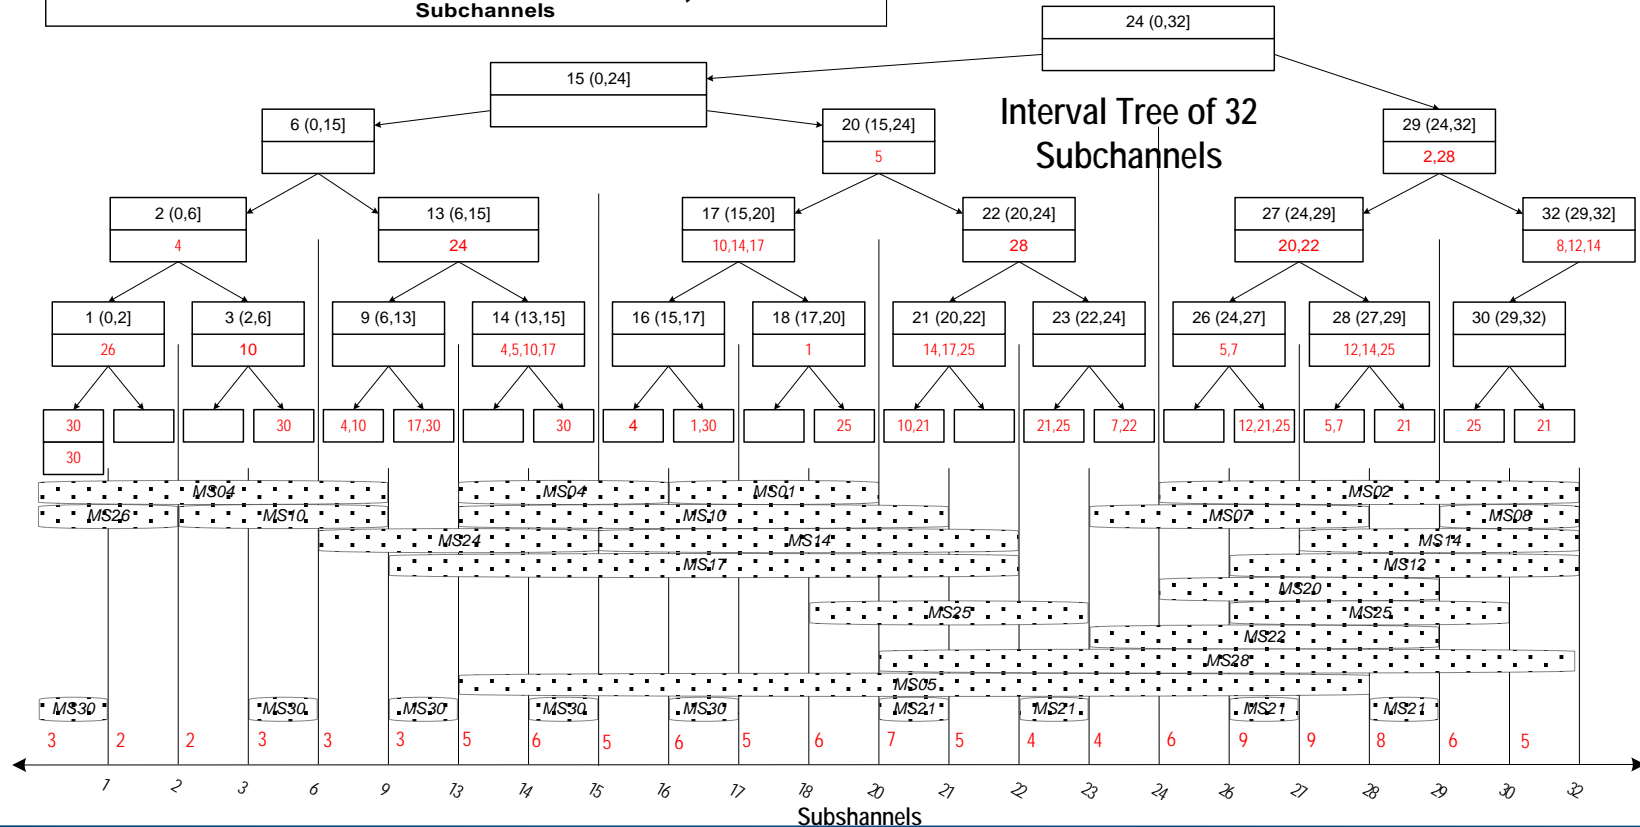



# “Slots per Mobile Station” Primary Subtree

- **Interpolation Search Tree or Van Emde Boas Tree, thus  $\forall \underline{k} MS$ ,**
  - i. needs  $O(K)$  space,
  - ii.  $O(\log\log K)$  depth,
  - iii. any process (search or update) costs  $O(\log\log K)$  expected time with high probability
- **Each node has at least:**
  - i. an identification  $\forall MS$ ,
  - ii. time slots needed for the transmission of incoming packets  $\forall$  specific timeframe (considering Modulation & Coding Scheme),
  - iii. timeslots are separated in five (5) categories (UGS, ertPS, rtPS, nrtPS, BE).
- **Can answer in  $O(\log\log K)$  time questions like:**
  - i. “How many slots  $MS_k$  requires for the transmission of non real time data?”
  - ii. “How many slots  $MS_k$  requires for the transmission of real time data packets, corresponding to data rate greater than the agreed **mrtr (minimum reserved traffic rate)**?”






# “Subchannels Interval Tree” Primary Subtree

- **Interval Tree, thus for  $N$  subchannels:**
  1. requires  $O(N \log N)$  space
  2. has  $O(\log N)$  depth
  3. needs  $O(N \log N)$  building time
  4. Its leaves need  $O(N)$  space
- **Each leaf contains the number of slots needed by all active users in corresponding time interval**
- **Each internal node “spans” to the whole interval defined by two groups of subchannels**
- **For the interval  $[a, b]$  defined by active subchannels of  $MS_k$ ,  $MS_k$  is stored in node  $x$  if and only if:**
  - i. interval  $[a, b]$  fully contains  $span(x)$
  - ii. interval  $[a, b]$  does not fully contain  $span(parent(x))$ , (e.g.  $span(6) = [2, 13]$ ,  $MS_5: [14, 28]$ , will be stored in nodes 14, 20, 26 & 28left).
- **For a specified interval of  $N'$  subchannels, any MS with active interval of subchannels in that interval, can be found in  $O(N' + \log N)$  time, consequently  $O(N)$ .**
- **Update of an  $MS_k$  active subchannels costs  $O(N)$  time, whereas in combination of “Slots per Mobile Station” subtree it costs  $O(\log \log N)$**
- **Can answer in  $O(N)$  time questions like:**
  - i. “Which MSs can reliably transmit at interval  $[a, b]$ ?”
  - ii. “How many slots have been counted for transmission at interval  $[a, b]$ ?”
  - iii. In combination with “Slots per Mobile Station”: “How many slots that have been counted for transmission at interval  $[a, b]$ , correspond to non real time BW, according to  $mrtr$  &  $mstr$ ?”



# Colored OFDMA Frame Registry Tree

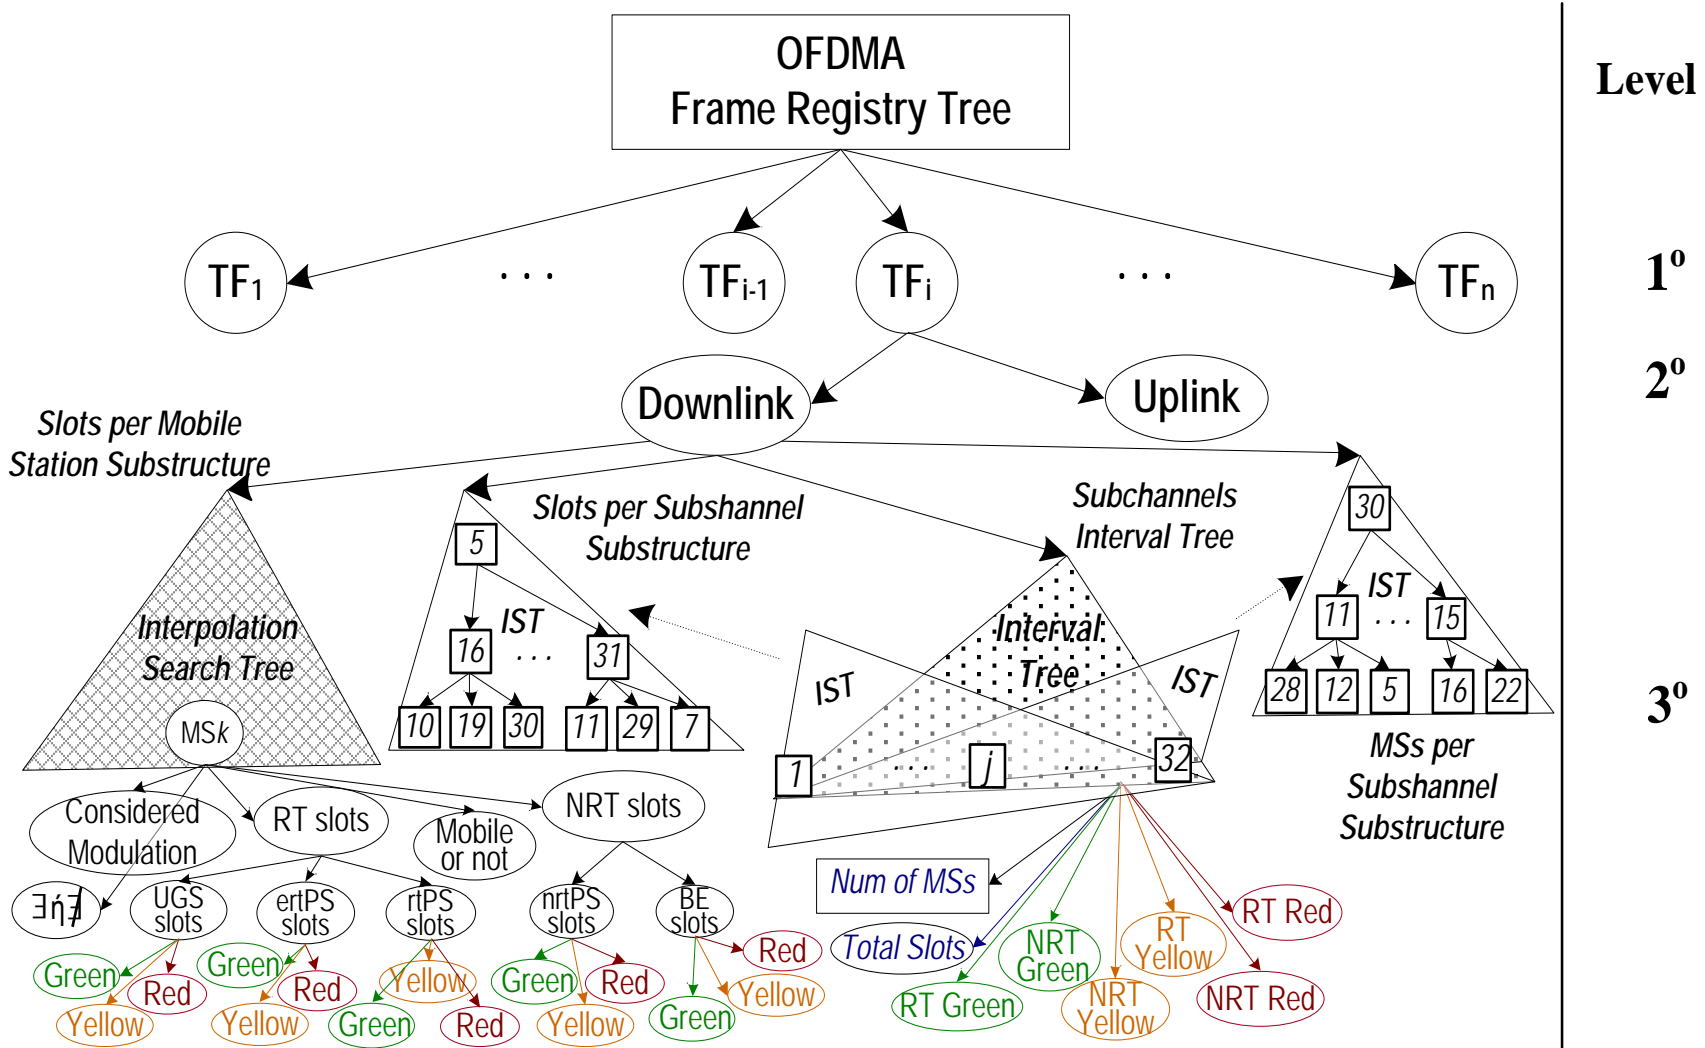



# “Slots per Subchannel” Secondary Subtree

- ***Interpolation Search Tree ή Van Emde Boas Tree, thus for  $N$  intervals:***
  - i. needs  $O(N)$  space
  - ii. has  $O(\log\log N)$  depth
  - iii. any process (search or update) costs  $O(\log\log N)$  expected time with high probability
- ***Subtree “Slots per Subchannel”:***
  - i. its nodes are the leaves of “Subchannels Interval Tree”
  - ii. keeps them sorted by the number of slots correspond to each interval
  - iii. gives access to each leaf “Subchannels Interval Tree” in  $O(\log\log N)$  time, for  $N$  intervals
  - iv. each update costs  $O(1)$  for given position,  $O(\log\log N)$  at average & in worst case  $O(\log N)$
  - v. required space limited in interconnection pointers
- ***Can answer in  $O(\log\log N)$  time questions like :***
  - i. “Which is the first empty slot in the interval  $[a,b]$ ?” or
  - ii. “Which is the elementary interval  $[a,b]$  with the least traffic?”.



# “MSs per Subchannel” Secondary Subtree

- ***Interpolation Search Tree ή Van Emde Boas Tree, οπότε για  $N$  διαστήματα,***
  - i. needs  $O(N)$  space,
  - ii. has  $O(\log\log N)$  depth
  - iii. any process (search or update) costs  $O(\log\log N)$  expected time with high probability
- ***Subtree “Mobile Stations per Subchannel”:***
  - i. its nodes are the leaves of “Subchannels Interval Tree”
  - ii. keeps them sorted by the each MS Id that can reliably transmit in each interval
  - iii. each update costs  $O(\log\log N)$  at average & in worst case  $O(\log N)$ ,
  - iv. required space limited in interconnection pointers
- ***Can answer in  $O(\log\log N)$  time questions like :***
  - i. “Among all available elementary intervals (1,32), which is the one [a,b], that the minimum number of MSs can reliably transmit?”



# Space evaluation of Colored OFDMA Frame Registry Tree

For  $K$  MSs,  $N$  subchannels, &  $c$  stored timeframes :

$$\begin{aligned} TotalStorage &= NumberOfFrames * \{Storage(Slots\_per\_MS) + \\ &Storage(Subchannels\_Interval\_Tree) + \\ &Storage(Slots\_per\_Subchannel) + \\ &Storage(MSs\_per\_Subchannels)\} \Leftrightarrow \end{aligned}$$

$$TotalStorage = c\{O(K)+O(N\log N)+O(N\log N)+ O(N\log N)\} \Leftrightarrow$$

$$TotalStorage = c * O(K+N\log N)$$

$$TotalStorage = O(c[K+N\log N])$$

e.g., IF  $\max(\max\_delay)=100\text{ms}$  AND  $\text{frame\_size}= 5 \text{ ms}$ , THEN  $c=20$ .



# CO-FRTS basic operations

## 1. Packet /request for transmission / Grant arrival & insertion in CO-Frame Registry Tree

- i.  $Deadline(P_{ij}) = ArrivalTime(P_{ij}) + MaxLatency(P_{ij})$  calculation,
- ii.  $SL_{ij} = f(Mod_k, SizeInBytes(P_{ij}))$  calculation, with  $C_j$  the connection it belongs,
- iii.  $Thr(P_{ij}) <?> mrtr(C_j)$  check, & coloring,
- iv. primary subtrees insertion ( $SL_{ij}/q$  for  $[a,b]$ ,  $q=b-a+1$  at Interval Tree),
- v. insertion / update at secondary subtrees.

## 2. Timeframe creation - Frame Map Creation Procedure (DL/UL MAP)

- i. *Timeframe Preparation Procedure*
  - Choose transmission interval  $\forall$  MS (IMF)
  - Cut excess slots – fulfill empty ones
  - counterbalance traffic among subchannels
- ii. *Timeframe Construction Procedure*

## 3. User characteristics modification





# Packet /request for transmission / Grant arrival & insertion in CO-FRTree


- Calculate packet deadline :  
 $Deadline(P_{ij}) = ArrivalTime(P_{ij}) + MaxLatency(P_{ij})$ , with  $C_j$  the connection it belongs
- Calculate :  
 $SL_{ij} = f(Mod_k, SizeInBytes(P_{ij}))$
- Search/find  $MS_k$  at “Slots per Mobile Station” subtree & update it according to the following:
  - if  $Thr(P_{ij}) < mrtr(C_j)$ , green node of  $ST_j$  is increased by  $SL_{ij}$ .
  - if  $mrtr(C_j) \leq Thr(P_{ij}) \leq mstr(C_j)$ , yellow node of  $ST_j$  is increased by  $SL_{ij}$ .
  - if  $Thr(P_{ij}) > mstr(C_j)$ , red node of  $ST_j$  is increased by  $SL_{ij}$ .
- At “Subchannels Interval Tree”:
  - if  $MS_k$  can reliably transmit μπορεί at interval  $[a,b]$ ,  $q=b-a+1$  subchannels,
  - balanced increment, meaning nodes between  $a$  &  $b$  are incremented by  $SL_{ij}/q$






# Timeframe Preparation Procedure

- **Aim: proper preparations of next timeframe for transmission ( $TF_1$ )**
- **Three major problems:**
  1. Existence of more than one intervals of subchannels, that some MSs can transmit with the same reliability (same SINR, probably single subchannels)
    - Only one interval of subchannels, e.g.  $MS_5, MS_{28}$ ,
    - Single subchannels, e.g.  $MS_{21}$ ,
    - More than one intervals with more than one subchannel each, e.g.  $MS_4, MS_{10}, MS_{30}$ .
  2. Abnormally distributed traffic with possible gaps or excess slots
  3. Data areas  $\forall$  MS should form a rectangle, (slots / subchannels  $\rightarrow$  integer).

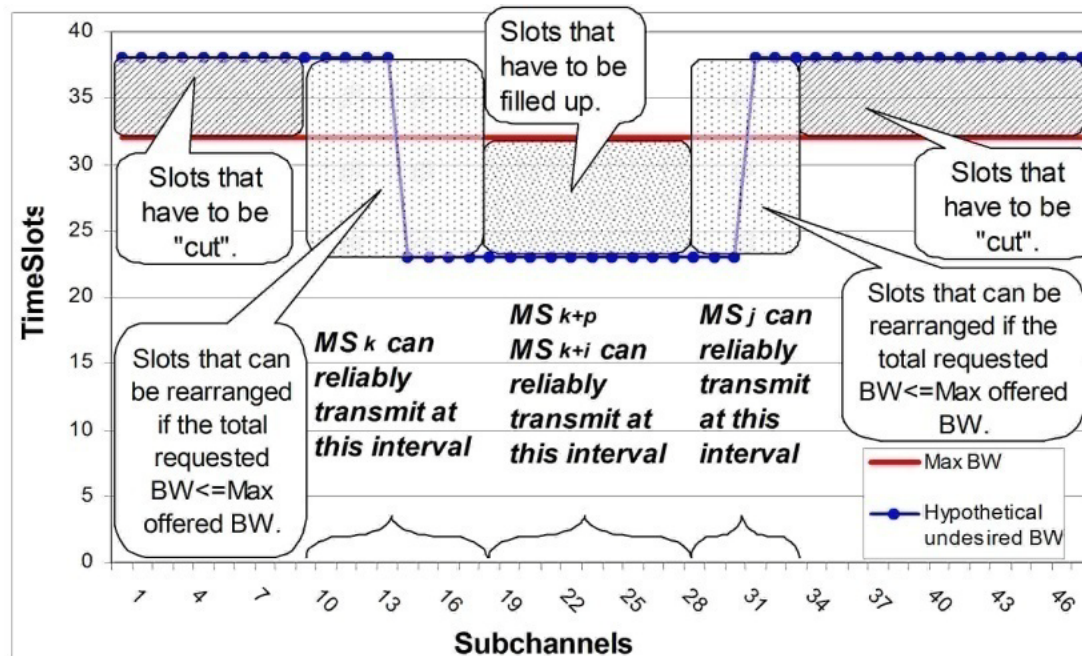



# CO-FRTree Example

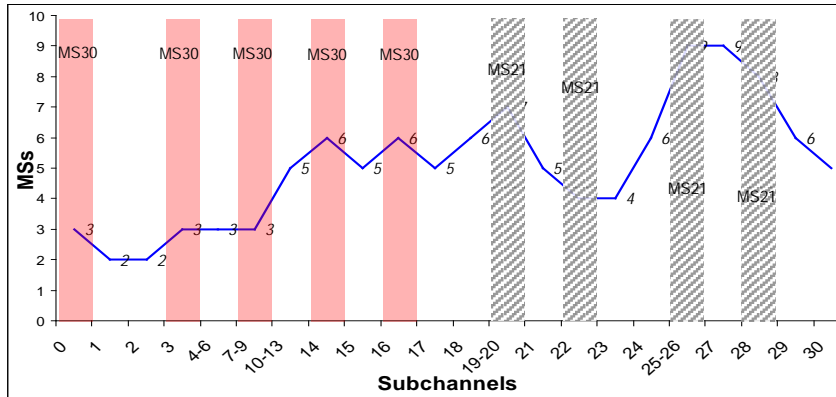

- MS01 → [17,20] ≡ (16,20)
- MS02 → [25,32] ≡ (24,32)
- MS04 → [1,9] U [14,16] ≡ (0,9) U (13,16)
- MS05 → [14, 28] ≡ (13,28)
- MS07 → [24,28] ≡ (23,28)
- MS08 → [30,32] ≡ (29,32)
- MS10 → [3,9], [14,21] ≡ (2,9) U (13,21)
- MS12 → [27,32] ≡ (26,32)
- MS14 → [16,22] U [28,32] ≡ (15,22) U (27,32)


- MS17 → [10,22] ≡ (9,22)
- MS20 → [25,29] ≡ (24,29)
- MS21 → 21 U 23 U 27 U 29 ≡ (20,21) U (22,23) U (26,27) U (28,29)
- MS22 → [24,29] ≡ (23,29)
- MS24 → [7,15] ≡ (6,15)
- MS25 → [19,23] U [27,30] ≡ (18,23) U (26,30)
- MS26 → [1,2] ≡ (0,2)
- MS28 → [21,32] ≡ (20,32)
- MS30 → 1 U [4-6] U [10-13] U 15 U 17 ≡ (0,1) U (3,6) U (9,13) U (14,15) U (16,17)

Nodes (all left open edges except zero with all right closed edges):

1,2,3,6,9,13,14,15,16,17,18,20,21,22,23,24,26,27,28,29,30,32

22 intervals:

1, 2, 3, 4-6, 7-9, 10-13, 14, 15, 16, 17, 18, 19-20, 21, 22, 23, 24, 25-26, 27, 28, 29, 30, 31-32

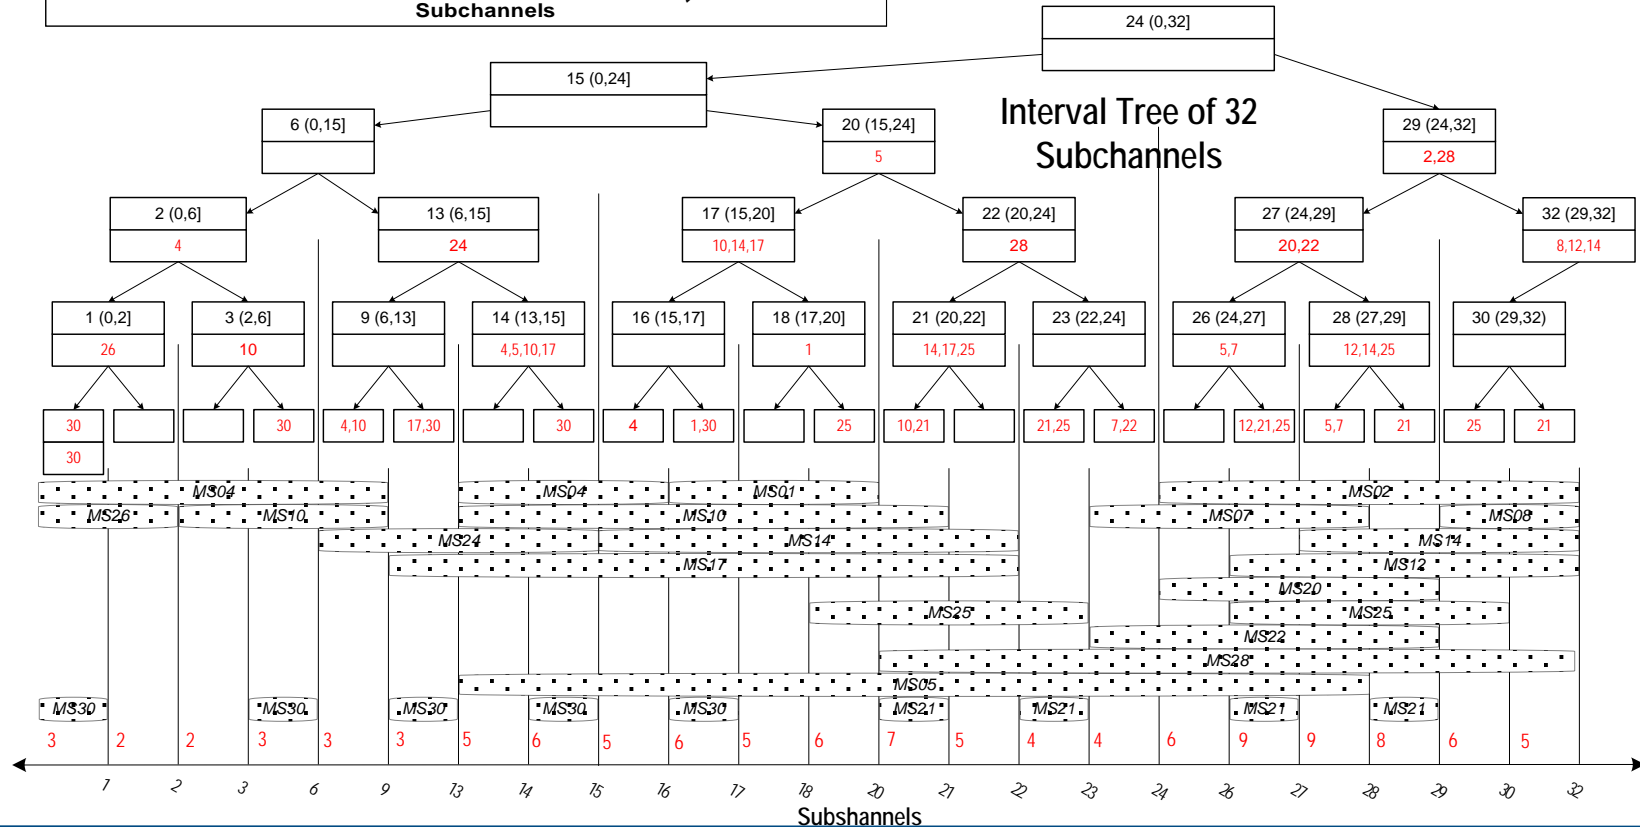



# Solution for choosing interval $\forall MS$

Considering that  $MS_k$  has to receive  $SL_k$  slots at  $m$  intervals  $i=[\alpha,\beta]$ ,  $ii=[\gamma,\delta]$  with  $(\beta < \gamma)$ .

Importance Factor (IMF) of  $MS_k$  at  $[\alpha,\beta]$   $IMF_{k,[\alpha,\beta]}$  is given by :

$$IMF_{k,[\alpha,\beta]} = \frac{\text{Number\_Of\_Slots\_Assigned\_By\_}MS_k\text{\_At}[\alpha,\beta]}{\text{Total\_Number\_Of\_Slots\_Assigned\_By\_All\_}MSs\text{\_At}[\alpha,\beta]} \Leftrightarrow$$

$$IMF_{k,[\alpha,\beta]} = \frac{SL_k}{TSL_{[\alpha,\beta]}} \Leftrightarrow$$

$$IMF_{k,[\alpha,\beta]} = \frac{SL_k}{TSL_1 + \dots + TSL_y + \dots + TSL_m}, TSL_y: 1 \leq y \leq m \leq N'$$

where  $m$  are the elementary intervals of subchannels, as they occur &  $TSL_y$  is the corresponding number of slots that have been allocated in each interval  $\mu$  by all  $MSs$  with this interval active.

**Cost:  $O(NK) + O(K \log N) = O(KN)$**



# Solution for cut excess slots – fill in the gaps

- **From “Slots per Subchannel”, find interval with excess slots**
- **Combining “Subchannels Interval Tree”, search/find MS with worst Modulation & Coding Scheme**

- **“Cut” slots with colored order:**

$$(CutPriority_{GREEN} < CutPriority_{YELLOW} < CutPriority_{RED}) \cup$$

$$(CutPriority_{UGS} < CutPriority_{ertPS} < CutPriority_{rtPS} < CutPriority_{nrtPS} < CutPriority_{BE})$$

- **Fill empty slots with opposite priority from next timeframes:**

$$(TransPriority_{GREEN} > TransPriority_{YELLOW} > TransPriority_{RED}) \cup$$

$$(TransPriority_{UGS} > TransPriority_{ertPS} > TransPriority_{rtPS} > TransPriority_{nrtPS} >$$

$$TransPriority_{BE})$$

- **Possible traffic balance**



# Total complexity evaluation for CO-FRTS

For  $N$  subchannels &  $K$  Mobile Stations

	Structure	Mobile Stations	Interval Tree of	Subchannels	Total Cost
Action		Structure-IST	Subchannels -MSs	Structure -IST	in Time
MS's Interval & Data Insertion	mean				
	max	$O(\log \log K)$	$O(N)$	$O(\log^2 \log N)$	$O(N + \log^2 \log N)$
MS's Data Insertion	mean				
	max	$O(\log \log K)$	$O(N)$	$O(\log^2 \log N)$	$O(N + \log^2 \log N)$
MS Search	mean				
	max	$O(\log \log K)$	$O(1)$	-	$O(\log \log K)$
Interval Update	mean	-		$O(1)$	
	max	-	$O(1)$	$O(N \log \log N)$	$O(N \log \log N)$
Elementary Interval Search	mean	-		$O(1)$	
	max	-	$O(\log N)$	$O(\log \log N)$	$O(\log \log N)$


$$\text{TotalCost} = O(N + \log^2 \log N) + O(N + \log^2 \log N) + O(K \log \log K) + O(N \log \log N) + O(N \log \log N) + O(KN) \Leftrightarrow$$

$$\text{TotalCost} = O(N) + O(K \log \log K) + O(N \log \log N) + O(KN) \Leftrightarrow$$

$$\underline{\underline{\text{TotalCost} = O(KN + K \log \log K + N \log \log N)}}$$



# Dimensionize Resource Management


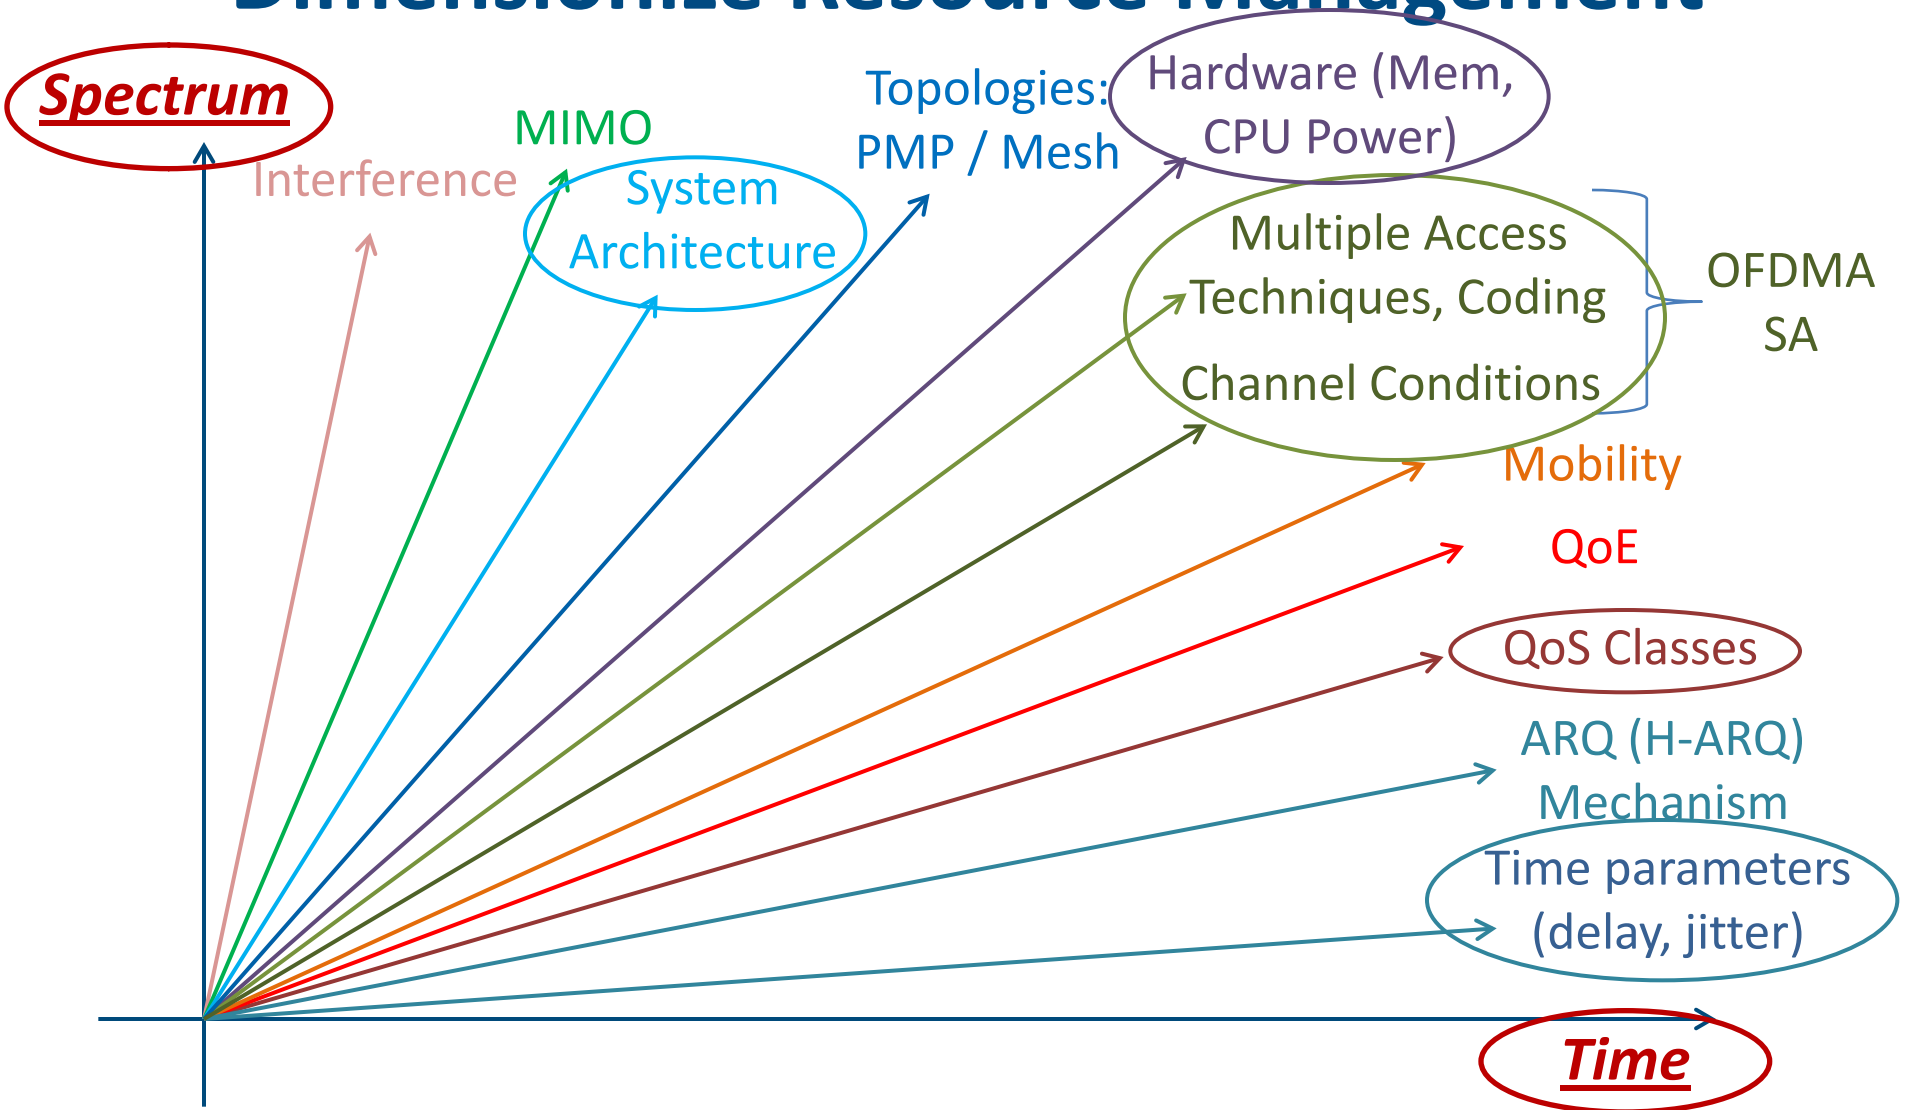






# IEEE 802.16-2004 Topologies


- **Point-to-Multipoint (PMP)**
- **Centralized Mesh mode**
- **Distributed Mesh mode**

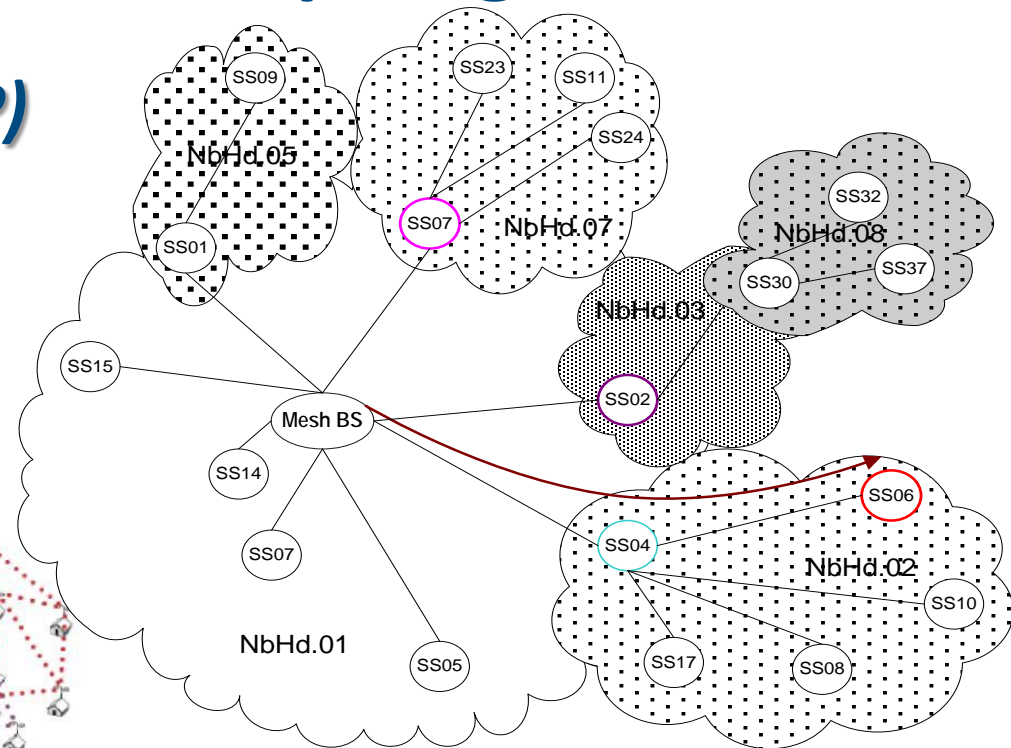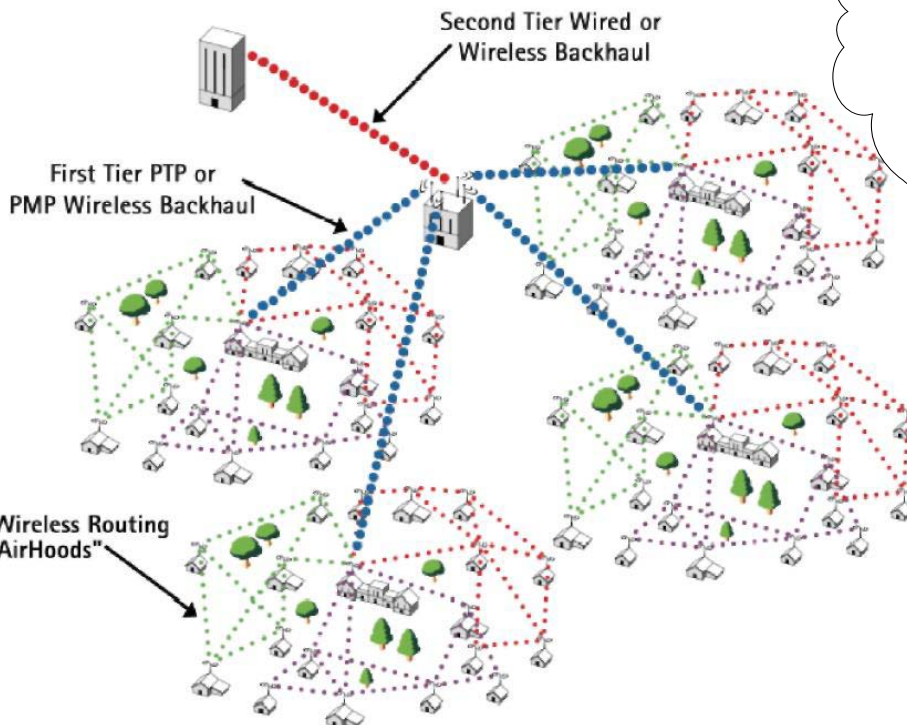





# Enhanced Frame Registry Tree - CoFRTS

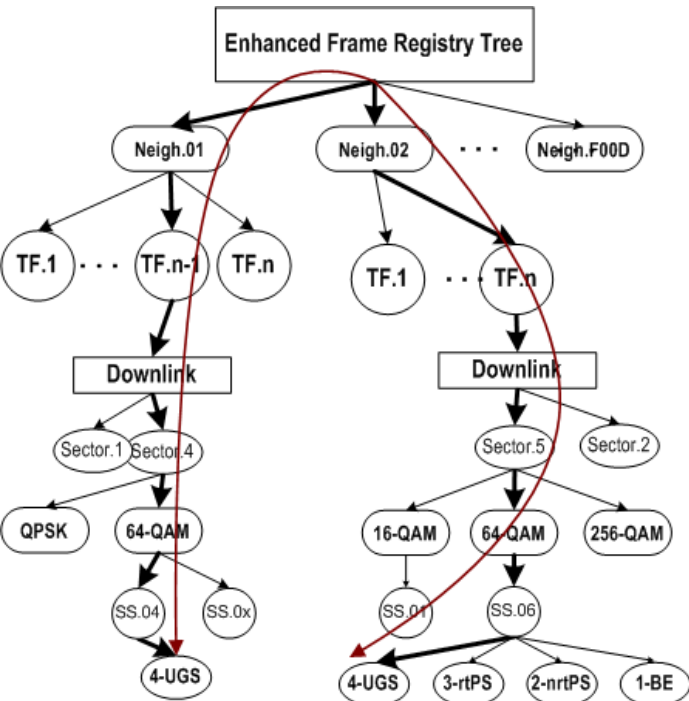

Επίπεδο

1°

2°


3°

4°

5°

6°

7°

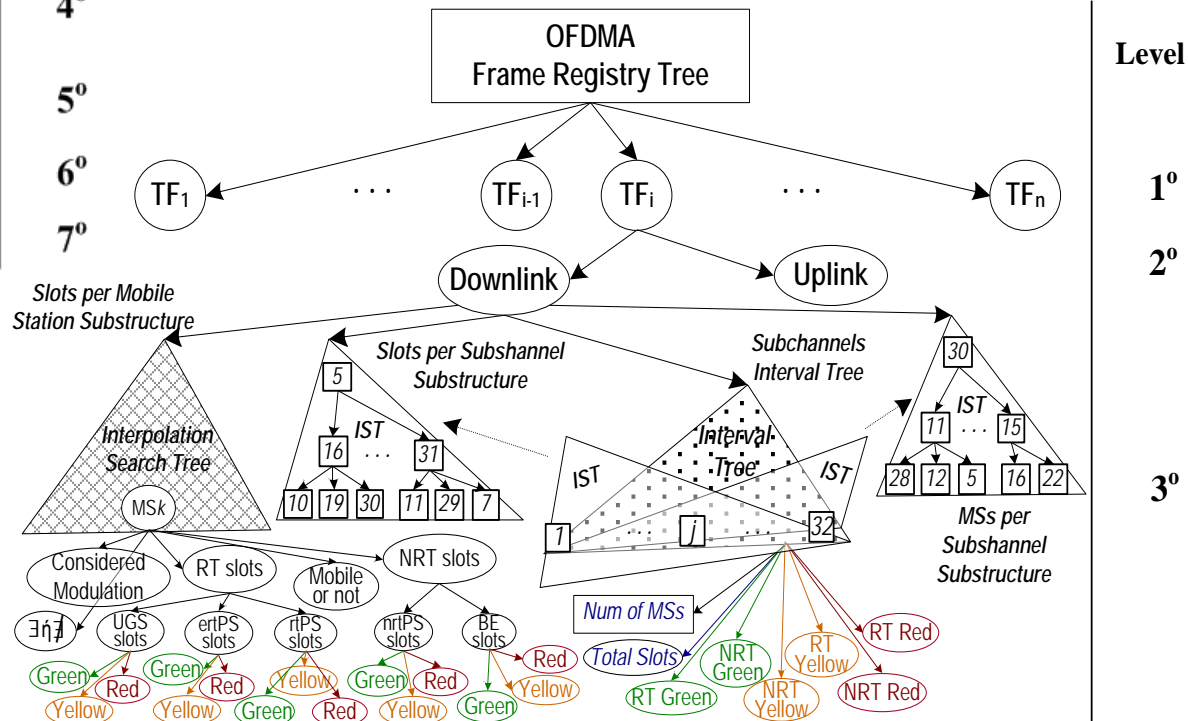

Level

1°

2°

3°



# Simulation Platform



# Widely used simulation platforms

- **Opnet :**
  - *supports Release 8 of the 3GPP LTE standard*
  - *supports the IEEE 802.16-2004 & IEEE 802.16e-2005 (not 802.16m-2011)*
  - *not free (very expensive)*
- **NS-3**
  - *evolution of NS-2*
  - *freeware*
  - *integration environment almost only in Linux*
  - *built using C++ & Python, scripting available with both languages*
  - *supports the 3GPP LTE standard (not LTE-A)*
  - *supports the IEEE 802.16-2004 & IEEE 802.16e-2005 (not 802.16m-2011)*
- **GloMoSim (Global Mobile Information System Simulator)**
- **OMNeT++**
- **NetSim**
- **NCTUNS**
- **Matlab**



# Need for our simulation environment (1)

**All available simulation tools are either:**

- *expensive (Opnet)*
- *not so user friendly, inflexible, thus awkward (NS-2/3)*
- *built for generic use*
- *very slow in adaptation of new technologies (LTE-A, WiMAX2 etc)*
- *lack of support for complicated structures & programming entities (objects - Matlab)*
- *very slow (Matlab - cause of Java)*




## Need for our simulation environment (2)

- *Easy integration (windows, MS Visual Studio 2005 or newer)*
- *Freeware*
- *Run in normal PC*
- *Group design, development & evolution (GAIN team work)*
- *Based in C++ for best memory and process usage and control*
- *Can support any modern and easily extent to future technologies*
- *Extracts results in xls file for best usage (matlab etc)*



# Basic Entities of Simulation Platform

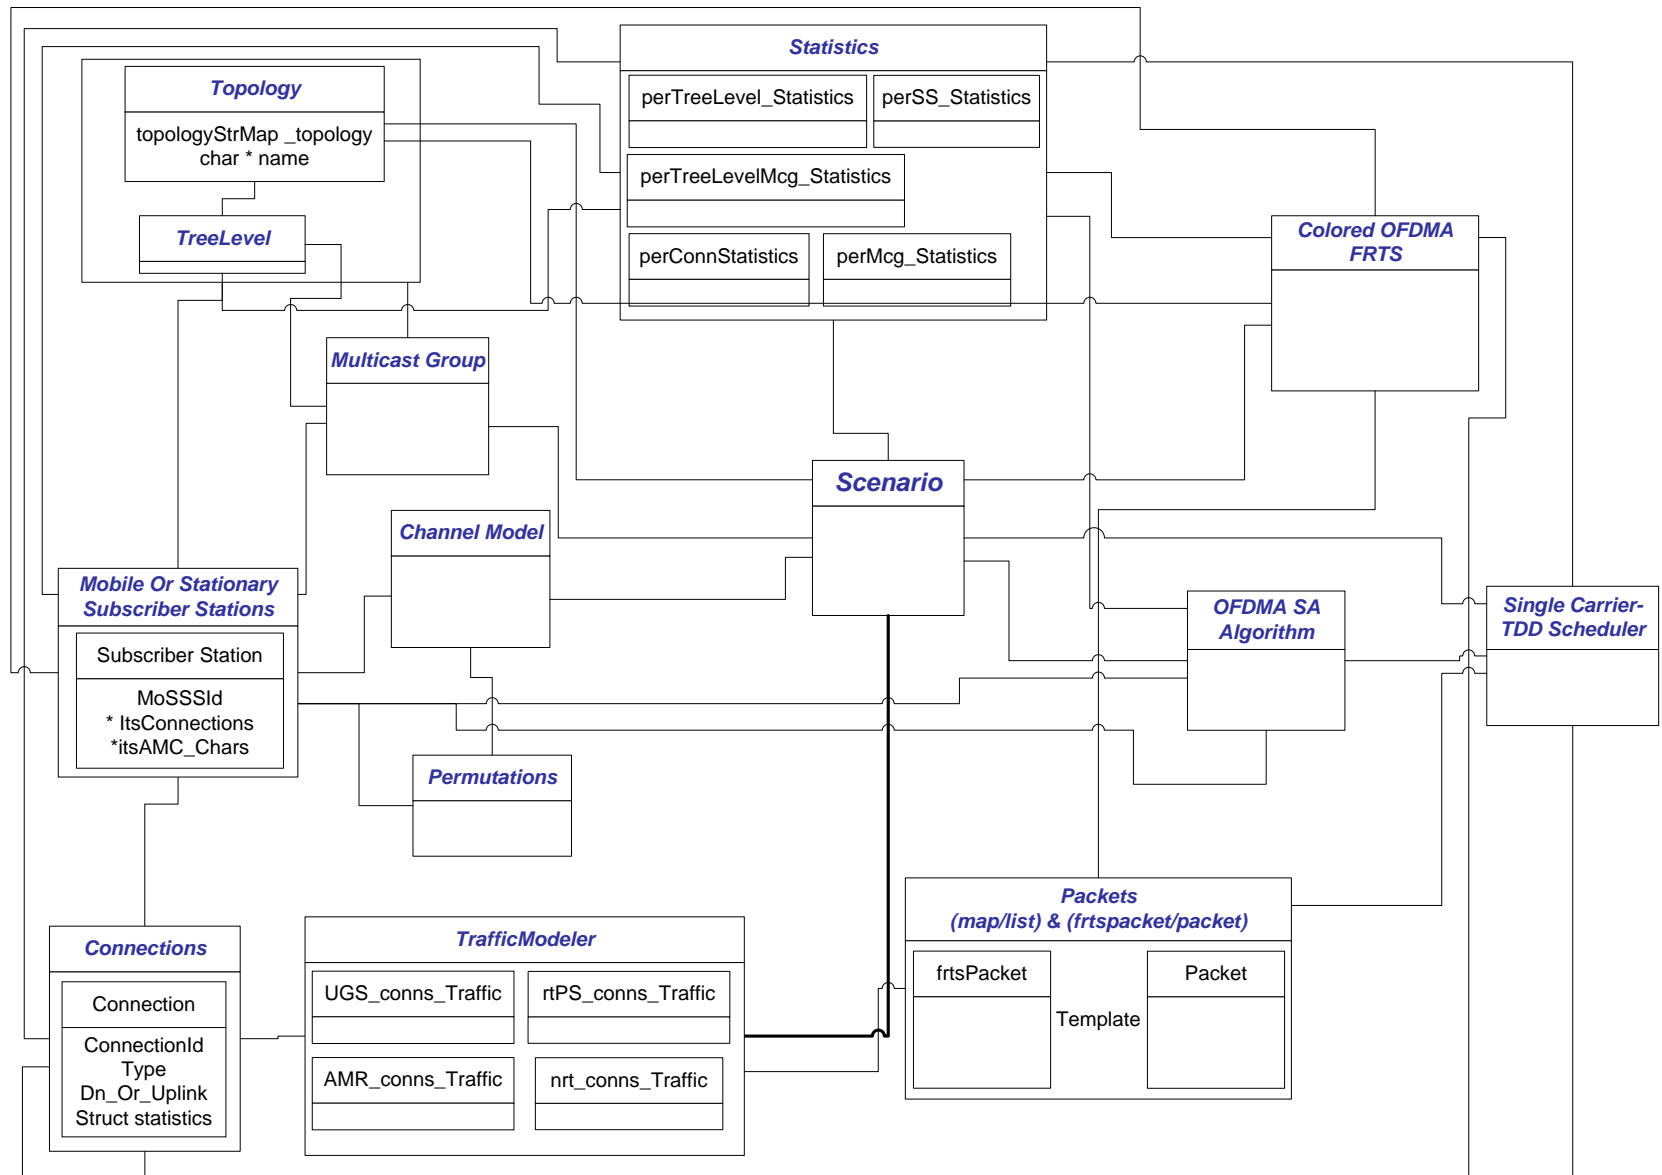



# Main characteristics of the Simulation Platform

- Uses libraries: MAP, MULTIMAP, SET, MULTISSET & LIST (B+ Trees)
- “Scenario”: definition of parameters by **#define** (e.g. **#define scenario\_PHY\_OFDMA**)
- “Topology”: can simulate very complicated tree topologies (e.g. n-nary tree or even more complicated)
- “Channel Model”: can use file created with Matlab (“channelEstimation.bin”)
- “Traffic Modeler”: → AMR according to 3GPP TS 26.071 v5.0.0
  - packet size 54, 66, 70, 80, 92, 102 & 114 bytes
  - sophisticated traffic model considering mrtr & mstr
  - video traffic from trace files (25 or 30 fps)
- “Statistics”: extraction of extensive results in “.xls / .xlsx” files.





# Possible future extensions

- **“Scenario”**: need for GUI
  - for parameters definition
  - for realtime simulation observation
- **“Channel Model”**: develop / integration in c++ models for
  - path-loss
  - multipath fading effect,
  - dynamic channel conditions creation
- **“Traffic Modeler”**: integration of
  - enrichment of traffic vreation models
- **Integration of a number of modern RA algorithms (library creation)**




# Conclusions



# Resource Management – Quadrants

Organizational Partners  
Professional Associations

3GPP Standardization  
IEEE Organizations

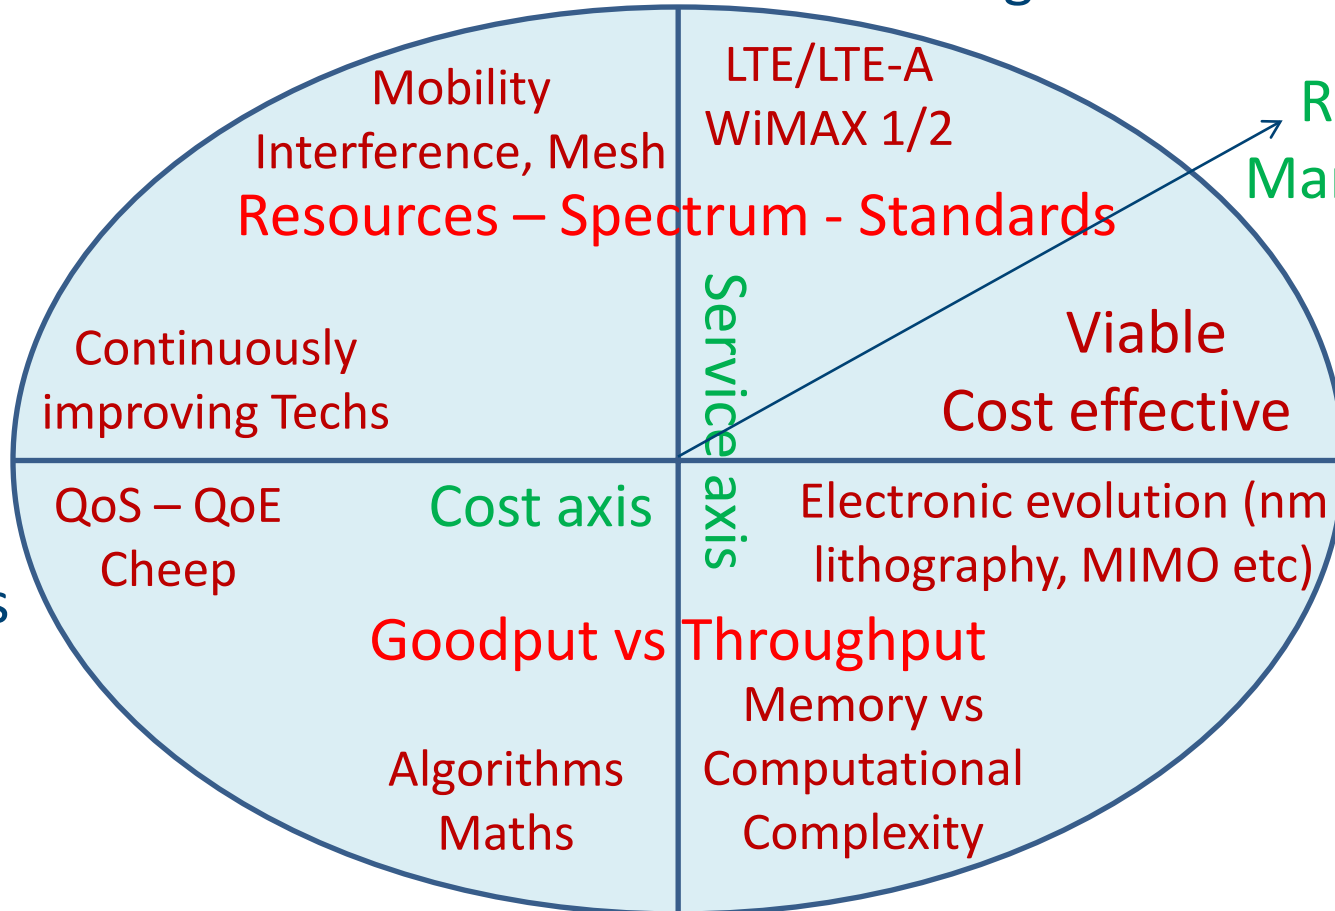

Resource Management

Not Civil Customers

Civil Customers

ISPs

Industry

Network Scientists



# Resource Allocation what we have seen so far

Resources ?  
(Visible -  
invisible)

Wireless  
Technologies (LTE,  
LTE-A, WiMAX,  
WiMAX2)

Resource Allocation  
– Scheduling - QoS

Traditional &  
Modern Scheduling  
Algorithms

Case Study:  
WiMAX (Co-FRTS)

PMP - MESH

Simulation  
Environments





**Thank you for your attention!**



# References (1)

- [1]. IEEE Std 802.16-2004, "IEEE Standard for Local and Metropolitan Area Networks – Part 16: Air Interface for Fixed Broadband Access Systems", October 2004.
- [2]. IEEE Std 802.16e-2005, "Amendment to IEEE Standard for Local and Metropolitan Area Networks - Part 16: Air Interface for Fixed Broadband Wireless Access Systems- Physical and Medium Access Control Layers for Combined Fixed and Mobile Operation in Licensed Bands", February 2006.
- [3]. Claude E. Shannon, A Mathematical Theory of Communication Urbana, IL:University of Illinois Press, 1949 (reprinted 1998).
- [4]. Jeffrey G. Andrews, Arunabha Ghosh, Rias Muhamed, "Fundamentals of WiMax", Prentice Hall.
- [5]. A. J. Goldsmith, "Wireless Communications", Cambridge University Press, 2005.
- [6]. P. Jung, P. Baier and A. Steil, "Advantages of CDMA and spread spectrum techniques over FDMA and TDMA in cellular mobile radio applications", IEEE Transactions on Vehicular Technology, pp.357-364, August 1993.
- [7]. S. Shakkottai, T.S. Rappaport and P. Karlson, "Cross-layer design for wireless networks", IEEE Communications Magazine, pp. 73-80, October 2003.
- [8]. S. Hara and R. Prasad, "Overview of multicarrier CDMA", IEEE Communications Magazine, 35(12):126-133, December 1997.
- [9]. X.Gui and T.S. Ng, "Performance of asynchronous multicarrier system in frequency selective fading channel", IEEE Transactions on Communications, 47(7): 1084-1091, July 1999.
- [10]. C. Y. Wong, "Multiuser OFDM with adaptive subcarrier, bit and power allocation", IEEE Journal on Selected Areas in Communications, Vol. 17, No. 10, pp. 1747-1758, October 1999.
- [11]. D. Tse, "Diversity in wireless networks", Stanford Wireless Communication Seminar, [www.stanford.edu/group/wcs/](http://www.stanford.edu/group/wcs/), April 2001.
- [12]. W. Rhee, J.M Chiofi, "Increase in Capacity of multiuser OFDM system using dynamic Subchannel allocation", IEEE Vehicular Technology Conference, pp. 1085-1089, Tokyo, May 2000.
- [13]. K. Wongthavarawat, and Aura Ganz, "Packet scheduling for QoS support in IEEE 802.16 broadband wireless access systems", Int. J. of Commun. Syst., vol. 16, pp. 81-96, 2003.
- [14]. Georgiadis L, Guerin R, Parekh A. "Optimal Multiplexing on a Single Link: Delay and Buffer Requirements", Proceedings of IEEE INFOCOM 94; vol. 2, 1994; 524–532.
- [15]. Demers A, Keshav S, Shenker S. "Analysis and Simulation of a Fair Queuing Algorithm", SIGCOMM CCR 19 1989; 4.
- [16]. D. Zhao and X. Shen, "Performance of packet voice transmission using IEEE 802.16 protocol" IEEE Wireless Communications, February 2007.



# References (2)

- [17]. S. Kim and I. Yeom, "TCP-Aware Uplink Scheduling for IEEE 802.16" IEEE COMMUNICATIONS LETTERS, VOL. 11, NO. 2, FEBRUARY 2007.
- [18]. L. Breslau et al., "Advances in network simulation," IEEE Computer, vol. 33, no. 5, pp. 59-67, May 2000. ([www.isi.edu/nsnam/ns/](http://www.isi.edu/nsnam/ns/))
- [19]. A. Bacioccola, C. Cicconetti, A. Erta, L. Lenzi, and E. Mingozzi, "Bandwidth Allocation with Half-Duplex Stations in IEEE 802.16 Wireless Networks" IEEE TRANSACTIONS ON MOBILE COMPUTING, VOL. 6, NO. 12, DECEMBER 2007.
- [20]. Q. Ni, A. Vinel, Y. Xiao, A. Turlikov, T. Jiang, "Investigation of Bandwidth Request Mechanisms under Point-to-Multipoint Mode of WiMAX Networks" IEEE Communications Magazine, May 2007.
- [21]. D. Niyato and E. Hossain, "A Queuing-Theoretic and Optimization-Based Model for Radio Resource Management in IEEE 802.16 Broadband Wireless Networks" IEEE TRANSACTIONS ON COMPUTERS, VOL. 55, NO. 11, NOVEMBER 2006.
- [22]. X. Bai, A. Shami, and Y. Ye, "Robust QoS Control for Single Carrier PMP Mode IEEE 802.16 Systems" IEEE TRANSACTIONS ON MOBILE COMPUTING, VOL. 7, NO. 4, APRIL 2008.
- [23]. E.-C. Park, "Efficient Uplink Bandwidth Request with Delay Regulation for Real-Time Service in Mobile WiMAX Networks", IEEE TRANSACTIONS ON MOBILE COMPUTING.
- [24]. B. Rong, Y. Qian and H.-H. Chen, "Adaptive Power Allocation and Call Admission Control in multiservice WiMAX access networks" IEEE Wireless Communications, February 2007.
- [25]. J. C. R. Bennett, H. Zhang, "Hierarchical Packet Fair Queuing Algorithms," IEEE/ACM Trans. Net., vol. 5, no. 5, Oct. 1997, pp. 675–89.
- [26]. A. Iera, A. Molinaro and S. Pizzi, "Channel-Aware Scheduling for QoS and Fairness Provisioning in IEEE 802.16/WiMAX Broadband Wireless Access Systems" IEEE Network, September/October 2007.
- [27]. D. Niyato and E. Hossain, "Service Differentiation in Broadband Wireless Access Networks with Scheduling and Connection Admission Control: A Unified Analysis" IEEE TRANSACTIONS ON WIRELESS COMMUNICATIONS, VOL. 6, NO. 1, JANUARY 2007.
- [28]. D. Niyato and E. Hossain, "Queue-Aware Uplink Bandwidth Allocation and Rate Control for Polling Service in IEEE 802.16 Broadband Wireless Networks" IEEE TRANSACTIONS ON MOBILE COMPUTING, VOL. 5, NO. 6, JUNE 2006.
- [29]. Y. Li and G. Zhu, "M-gated scheduling in wireless networks: Performance and cross-layer design," in Proc. IEEE ICC, pp. 32–37.
- [30]. Y. Li and G. Zhu, "M-Gated Scheduling and Cross-Layer Design for Heterogeneous Services Over Wireless Networks", IEEE TRANSACTIONS ON VEHICULAR TECHNOLOGY, VOL. 58, NO. 4, MAY 2009.





# References (3)

- [31]. H. Du, J. Liu and J. Liang, "Downlink Scheduling for multimedia Multicast/Broadcast over mobile WiMAX: connection-oriented multistate adaptation", IEEE Wireless Communications August 2009.
- [32]. J. F. Borin and N. Fonseca, "Scheduler for IEEE 802.16 Networks", IEEE COMMUNICATIONS LETTERS, VOL. 12, NO. 4, APRIL 2008.
- [33]. N. Young, "Sequential and Parallel Algorithms for Mixed Covering and Packing", Foundations of Computer Science 2001, p. 538.
- [34]. L. Fleischer, K. Wayne, "Faster Approximation Algorithms for Generalized Network Flow", ACM/SIAM Symposium on Discrete Algorithms, 1999.
- [35]. T. H. Cormen, C. E. Leiserson, R. L. Rivest, "Introduction to Algorithms", McGraw-Hill, New York 1990.
- [36]. H. W. Kuhn, "The Hungarian Method for the Assignment Problem", naval Research Logistic Quartetly, Vol. 2, pp. 83-97, 1955.
- [37]. J. Munkres, "Algorithms for the Assignment and Transportation Problems", Journal of the Society for Industrial and Applied Mathematics, March 1957.
- [38]. Y. J. Zhang and K. B. Letaief. "Multiuser adaptive subcarrier-and-bit allocation with adaptive cell selection for OFDM systems", IEEE Transactions on Wireless Communications, 3(4):1566–1575, September 2004.
- [39]. Kibeom Seong, Mehdi Mohseni, and John M. Cioffi. "Optimal Resource Allocation for OFDMA Downlink Systems", IEEE International Symposium on Information Theory 2006.
- [40]. W. Yu, G. Ginis, and J. Cioffi. "Distributed multiuser power control for digital subscriber lines", IEEE Journal on Selected Areas in Communications, 20(5):1105–1115, June 2002.
- [41]. W. Rhee and J. M. Cioffi. "Increase in capacity of multiuser OFDM system using dynamic subchannel allocation", In Proceedings, IEEE Vehicular Technology Conference, pp. 1085–1089, Tokyo, May 2000.
- [42]. I. Wong, Z. Shen, B. Evans, and J. Andrews. "A low complexity algorithm for proportional resource allocation in OFDMA systems", In Proceedings, IEEE Signal Processing Workshop, pp. 1–6, Austin, TX, October 2004.
- [43]. W. Wang, Z. G., X. Shen, C. Chen and Jun Cai, "Dynamic Bandwidth Allocation for QoS Provisioning in IEEE 802.16 Networks with ARQ-SA" IEEE TRANSACTIONS ON WIRELESS COMMUNICATIONS, VOL. 7, NO. 9, SEPTEMBER 2008.
- [44]. J. Huang, V. G. Subramanian, R. Agrawal, and R. Berry, "Joint Scheduling and Resource Allocation in Uplink OFDM Systems for Broadband Wireless Access Networks", IEEE Journal On Selected Areas In Communications, Feb. 2009.
- [45]. X. Ji, J. Huang, M. Chiang, G. Lafruit and F. Catthoor, "Scheduling and Resource Allocation for SVC Streaming over OFDM Downlink Systems", IEEE Transactions On Circuits And Systems For Video Technology, vol. 19, no. 10, October 2009.



# References (4)

- [46]. A. L. Stolyar, "On the asymptotic optimality of the gradient scheduling algorithm for multiuser throughput allocation," *Operat. Res.*, vol. 53, no. 1, pp. 12–25, 2005.
- [47]. J. Huang, V. G. Subramanian, R. Agrawal, and R. A. Berry, "Downlink Scheduling and Resource Allocation for OFDM Systems", *IEEE Transactions On Wireless Communications*, vol. 8, no. 1, January 2009.
- [48]. L.-C. Wang and A. Chen, "Optimal Radio Resource Partition for Joint Contention- and Connection-Oriented Multichannel Access in OFDMA Systems", *IEEE Transactions On Mobile Computing*, vol. 8, no. 2, February 2009.
- [49]. E.-C. Park and H. Kim, "A Dual Feedback Approach of Request-Based Bandwidth Allocation for Real-Time Service in Broadband Wireless Access Networks", *IEEE Transactions On Communications*, vol. 57, no. 3, March 2009.
- [50]. Y.-J. Chang, F.-T. Chien and C.-C. J. Kuo, "Cross-layer QoS Analysis of Opportunistic OFDM-TDMA and OFDMA Networks", *IEEE Journal On Selected Areas In Communications*, vol. 25, no. 4, May 2007.
- [51]. A. Biagioni, R. Fantacci, D. Marabissi and D. Tarchi, "Adaptive Subcarrier Allocation Schemes for Wireless OFDMA Systems in WiMAX Networks", *IEEE Journal On Selected Areas In Communications*, vol. 27, no. 2, February 2009.
- [52]. Y. B.-Shimol, I. Kitroser and Y. Dinitz, "Two-Dimensional Mapping for Wireless OFDMA Systems", *IEEE Transactions On Broadcasting*, vol. 52, no. 3, Sep. 2006.
- [53]. D. Xenakis, D. Tsolkas, S.Xergias, N. Passas, and L. Merakos : "A Dynamic Subchannel Allocation Algorithm for IEEE 802.16e Networks", *IEEE International Symposium on Wireless Pervasive Computing (ISWPC) 2008*, Santorini, Greece, May 2008.
- [54]. D. Xenakis, D. Tsolkas, N. Passas, and L. Merakos, "Dynamic resource allocation in adaptive multiuser multicarrier systems", *European Wireless 2010*, Lucca, Italy, April 2010.
- [55]. Z. Shen, J.G Andrews, B. Evans, "Optional Power Allocation for multiuser OFDM", *IEEE Globecom*, pp. 337-341, San Francisco, December 2003.
- [56]. Z. Shen, J.G Andrews, B. Evans, "Adaptive Resource Allocation for multiuser OFDM with constrained fairness", *IEEE Transactions on Wireless Communications*, 4(6): 2726 – 2737, November 2006.
- [57]. D. Tse, "Diversity in wireless networks", *Stanford Wireless Communication Seminar*, [www.stanford.edu/group/wcs/](http://www.stanford.edu/group/wcs/) , April 2001.
- [58]. P. Viswanath, D. Tse, R. Laroia, "Opportunistic beamforming using dumb antennas", *IEEE Transactions on Information Theory*, 48(6): 1277 – 1294, June 2002.
- [59]. C. Huang, H.-H. Juan, M.-S. Lin and C.-J. Chang, "Radio resource management of heterogeneous services in mobile WiMAX systems", *IEEE Wireless Communications*, February 2007.



# References (5)

- [60]. P. Pahalawatta, R. Berry, T. Pappas and A. Katsaggelos, "Content-Aware Resource Allocation and Packet Scheduling for Video Transmission over Wireless Networks" IEEE Journal on Selected Areas in Communications, vol. 25, no. 4, May 2007.
- [61]. H. Lee, T. Kwon and D.-H. Cho, "An enhanced uplink scheduling algorithm based on voice activity for VoIP services in IEEE 802.16d/e system", IEEE Communications Letters, vol. 9, no. 8, August 2005.
- [62]. S. Bashar and Z. Ding, "Admission Control and Resource Allocation in a Heterogeneous OFDMA Wireless Network", IEEE Transactions On Wireless Communications, vol. 8, no. 8, August 2009.
- [63]. S.-M. Oh, S. Cho, J.-H. Kim and J. Kwun, "VoIP Scheduling Algorithm for AMR Speech Codec in IEEE 802.16e/m System", IEEE Communications Letters, vol. 12, no. 5, May 2008.
- [64]. F. Hou, J. She, P.-H. Ho, and X. Shen, "A Flexible Resource Allocation and Scheduling Framework for Non-real-time Polling Service in IEEE 802.16 Networks", IEEE Transactions On Wireless Communications, v. 8, n. 2, Feb. 2009.
- [65]. Y. B.-Shimol, E. Chai and I. Kitroser, "Efficient Mapping of Voice Calls in Wireless OFDMA Systems", IEEE Communications Letters, vol. 10, no. 9, September 2006.
- [66]. S. H. Ali, K.-D. Lee and V. Leung, "Throughput Constrained Opportunistic Scheduling in Cellular Data Networks", IEEE Transactions On Vehicular Technology, vol. 58, no. 3, March 2009.
- [67]. Q. Liu, X. Wanand and G. B. Giannakis, "A Cross-Layer Scheduling Algorithm with QoS Support in Wireless Networks", IEEE Transactions On Vehicular Technology, vol. 55, no. 3, May 2006.
- [68]. B. Rong, Y. Qian and K. Lu, "Integrated Downlink Resource Management for Multiservice WiMAX Networks", IEEE Transactions On Mobile Computing, v.6, n.6, Jun. 2007.
- [69]. S. H. Ali, K.-D. Lee and V. Leung, "Dynamic resource allocation in OFDMA Wireless Metropolitan Area Networks", IEEE Wireless Communications, Feb.2007.
- [70]. W. S. Jeon and D. G. Jeong, "Combined Connection Admission Control and Packet Transmission Scheduling for Mobile Internet Services", IEEE Transactions On Vehicular Technology, vol. 55, no. 5, September 2006.
- [71]. C.-M. Yen, C.-J. Chang, F.-C. Ren and J.-A. Lai, "Dynamic Priority Resource Allocation for Uplinks in IEEE 802.16 Wireless Communication Systems", IEEE Transactions On Vehicular Technology, vol. 58, no. 8, October 2009.
- [72]. V. Corvino, V. Tralli and R. Verdone, "Cross-Layer Radio Resource Allocation for Multicarrier Air Interfaces in Multicell Multiuser Environments" IEEE Transactions On Vehicular Technology, vol. 58, no. 4, May 2009.



# References (6)

- [73]. V. Corvino, V. Tralli, and R. Verdone, "Cross-layer resource allocation for MC-CDMA," in Proc. 4th ISWCS, Trondheim, Norway, Oct. 2007, pp. 267–271.
- [74]. S. Xergias, N. Passas, and L. Merakos, "Flexible Resource Allocation in IEEE 802.16 Wireless Metropolitan Area Networks", Proc. 14th IEEE Workshop on Local and Metropolitan Area Networks (LANMAN), Chania, Greece, September 2005.
- [75]. ETSI EN 301 790 V1.4.1, "Interaction channel for satellite distribution systems", September 2005.
- [76]. ETSI TR 101 790 V1.3.1, "Interaction channel for Satellite Distribution Systems; Guidelines for the use of EN 301 790", September 2006.
- [77]. A.K. Salkintzis, N. Passas, and S. Xergias, "Performance Evaluation of Voice Call Transfer between UMTS and 802.16e", Design & Developers Forum, IEEE GLOBECOM 2007, Washington D.C., November 2007.
- [78]. A. Lygizou, S. Xergias, N. Passas, and L. Merakos, "A Prediction-based Scheduling Mechanism for Interconnection between WiMax and Satellite Networks", IEEE International Wireless Communications and Mobile Computing Conference (IWCMC) 2008, Chania, Greece, August 2008.
- [79]. A. Lygizou, S. Xergias, N. Passas, and L. Merakos, "A Prediction-based Scheduling Mechanism for Interconnection between WiMax and Satellite Networks", International Journal of Autonomous and Adaptive Communications Systems, vol. 2, issue 2, 2009.
- [80]. M. S. Kuran, B. Yilmaz, F. Alagoz, T. Tugcu, "Quality of Service in Mesh Mode IEEE 802.16 Networks", IEEE International Conference on Software, Telecommunications and Computer Networks, SoftCom 2006, Split, Croatia, Sept. 2006.
- [81]. J. Chen et al., "A Multicast Mechanism in WiMax Mesh Network", Asia-Pacific Conference on Communication (APCC), Busan, Korea, Aug. 2006.
- [82]. S. Xergias, N. Passas, and A. Salkintzis, "Centralized Resource Allocation for Multimedia Traffic in IEEE 802.16 Mesh Networks", Proceedings of the IEEE, vol. 98, issue 1, January 2008.
- [83]. S. Xergias, A. Lygizou, N. Passas, and L. Merakos, "QoS Sensitive Traffic Scheduling in Broadband Wireless Mesh Networks", Proc. 15th IST Summit on Mobile and Wireless Communications, Mykonos, Greece, June 2006.
- [84]. The MathWorks ([www.mathworks.com](http://www.mathworks.com)), MATLAB technical documentation, MATLAB Online Documentation.
- [85]. S. Xergias, N. Passas, and L. Merakos, "Efficient Multimedia Transmission in WiMax Mesh Networks", Proc. IEEE International Conference on Communications (ICC) 2006, Workshop on IP over Broadcasting Networks, Istanbul, Turkey, June 2006.
- [86]. S. Xergias, N. Passas, A. Lygizou, and A.K. Salkintzis, "A Multimedia Traffic Scheduler for IEEE 802.16 Point-to-Multipoint Networks", accepted in the IEEE International Conference on Communications (ICC) 2008, Beijing, China, May 2008.



# References (7)

- [87]. M. S. Kuran, B. Yilmaz, F. Alagoz, T. Tugcu. "Quality of Service in Mesh Mode IEEE 802.16 Networks". IEEE International Conference on Software, Telecommunications and Computer Networks, SoftCom 2006.
- [88]. Yacoub, M. D., Foundations of Mobile Radio Engineering, CRC Press, Boca Raton, FL, USA, 1993.
- [89]. 3GPP TS 26.236 v5.7.0, "Transparent end-to-end Packet-switched Streaming Service (PSS), Protocols and codecs (Release 5)", June 2005.
- [90]. 3GPP TS 26.071 v5.0.0, "AMR speech Codec; General description (Release 5)", Dec. 2002.
- [91]. Kaporis, A., Makris, Ch., Sioutas, S., Tsakalidis, A., Tsihclas, K. and Zaroliagis, Ch. (2006) "Dynamic Interpolation Search Revisited", ICALP 2006, Part I, LNCS 4051, 382-394.
- [92]. Peter van Emde Boas, R. Kaas, and E. Zijlstra: "Design and Implementation of an Efficient Priority Queue", Mathematical Systems Theory 10: 99-127, 1977.
- [93]. Franco P. Preparata and Michael Ian Shamos. "Computational Geometry: An Introduction". Springer-Verlag, 1985.
- [94]. Thomas H. Cormen, Charles E. Leiserson, Ronald L. Rivest, and Clifford Stein. "Introduction to Algorithms", Second Edition. MIT Press and McGraw-Hill, 2001. ISBN 0-262-03293-7.
- [95]. Physical Layer for Dynamic Spectrum Access and Cognitive Radio, [www.ict-phydyas.org](http://www.ict-phydyas.org), INFISO-ICT-211887.
- [96]. OPNET WiMAX Model Development Consortium, OPNET Network Simulator with WiMAX Model, <http://www.opnet.com/WiMax>.
- [97]. The Network Simulator-ns-2, <http://www.isi.edu/nsnam/ns/>.
- [98]. The NCTUns network simulator and emulator, <http://nsl10.csie.nctu.edu.tw/>.
- [99]. N. Blaunstein, Radio Propagation in Cellular Networks. Artech House, 1999.
- [100]. ITU-R Task Group 8/1 "Guidelines for Evaluation of Radio Transmission Technologies for IMT-2000," Recommendation ITUR M.1225, 1999.